



Athlet[®]
Qualitätswerkzeuge



Dear Sir / Madam,

We are delighted to present the new ATHLET catalogue.

Since its acquisition by ROTEC in May 2020, our team has worked hard to revitalise the traditional ATHLET brand.

The entire range has been scrutinised and the packaging and presentation have been revised and improved.

Due to changes in consumer behaviour, we have had to remove some items from the range. We constantly monitor the market to keep the range up-to-date and competitive and therefore adapt it.

Customised products are still available on request.

Due to the integration of ATHLET into ROTEC, the range of bits and bit holders from product group 08 will only be available in the ROTEC version in the future. The range is completely identical in terms of design and quality. Concentrating this product group on one version improves stock keeping. This allows us to supply you much faster.

We are convinced that the new catalogue will present you with an interesting and high-quality range of screwdrivers and hand tools.

In combination with the ROTEC delivery programme, you will also have access to a wide range of precision tools for metal, construction, wood, etc. Our catalogues can be downloaded from our website www.rotec.tools.

The products meet our strict quality and safety requirements. Constant further developments in quality, design and packaging are the basis for our joint success.

A large warehouse and perfect logistics enable us to ship the ordered goods usually on the same day.

We look forward to continuing our successful cooperation.

The Athlet team



| Chapter | | Page |
|---------|--|------|
| 02 | 2C-Screwdrivers | 7 |
| 03 | 1C-Screwdrivers | 19 |
| 04 | Mini-screwdrivers with plastic handles | 29 |
| 05 | Wooden handle screwdrivers | 33 |
| 06 | Screwdrivers 'Electronics' and voltage testers | 37 |
| 07 | Hexagon keys and screwdrivers with T-handle | 45 |
| 08 | Bits and bitholders | 55 |
| 09 | Awls, punches and scribes | 104 |
| 11 | Chisels and punches | 112 |
| 12 | Hammers | 122 |
| 14 | Additional range and specialties | 126 |






2C Screwdrivers



02

A020 2C-VDE Screwdriver 'Slim', SL

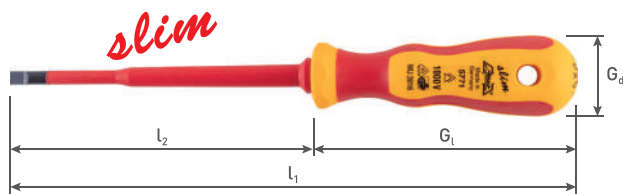


Execution: 2C-VDE Screwdriver in slim execution, profile SL (Slot). Made of high-grade MoV-steel with a burnished tip.

Application: Easier access to deep-set screws.

| Type | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | € / pc |
|------------|-------|-------|-------|-------|--------|--------------|--------------|
| SL 0,6x3,5 | 100 | 195 | 95 | 29 | 6 | 02.5771.0600 | 10,67 |
| SL 0,8x4,0 | 100 | 195 | 95 | 29 | 6 | 02.5771.0800 | 11,69 |
| SL 1,0x5,5 | 125 | 230 | 105 | 33 | 6 | 02.5771.1000 | 12,96 |



2C-VDE Screwdriver 'Slim', PH

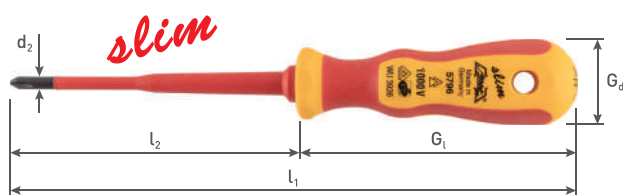


Execution: 2C-VDE Screwdriver in slim execution, profile PH (Phillips). Made of high-grade MoV-steel with a burnished tip.

Application: Easier access to deep-set screws.

| Type | d_2 | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | € / pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PH 1 | 4,5 | 100 | 195 | 95 | 29 | 6 | 02.5796.1000 | 11,26 |
| PH 2 | 6 | 125 | 230 | 105 | 33 | 6 | 02.5796.2000 | 13,22 |



2C-VDE Screwdriver 'Slim', PZ

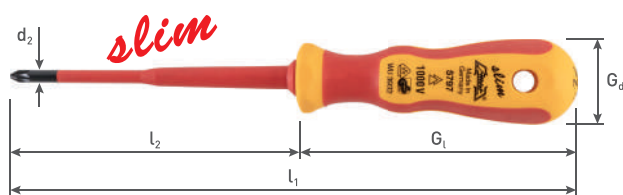


Execution: 2C-VDE Screwdriver in slim execution, profile PZ (Poqidriv). Made of high-grade MoV-steel with a burnished tip.

Application: Easier access to deep-set screws.

| Type | d_2 | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | € / pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PZ 1 | 4,5 | 100 | 195 | 95 | 29 | 6 | 02.5797.1000 | 11,86 |
| PZ 2 | 6 | 125 | 230 | 105 | 33 | 6 | 02.5797.2000 | 13,86 |



2C-VDE Screwdriver 'Slim', PZ/FL

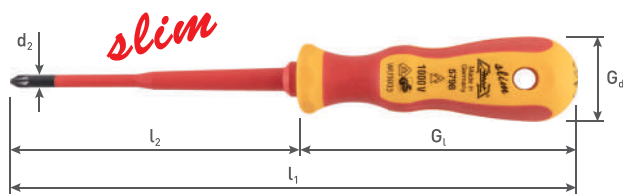


Execution: 2C-VDE Screwdriver in slim execution, profile PZ/FL (Poqidriv/Slot). Made of high-grade MoV-steel with a burnished tip.

Application: Easier access to deep-set screws.

| Type | d_2 | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | € / pc |
|---------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PZ/FL 1 | 4,5 | 100 | 195 | 95 | 29 | 6 | 02.5798.1000 | 13,26 |
| PZ/FL 2 | 6 | 125 | 230 | 105 | 33 | 6 | 02.5798.2000 | 15,47 |



2C-VDE Screwdriver 'Slim', T

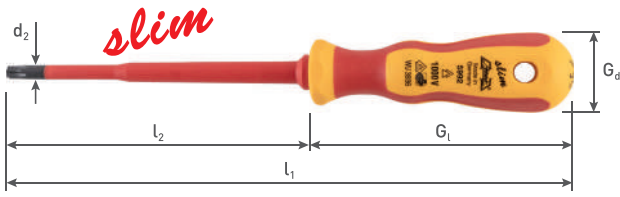


Execution: 2C-VDE Screwdriver in slim execution, profile T (Torx). Made of high-grade MoV-steel with a burnished tip.

Application: Easier access to deep-set screws.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | € / pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|--------------|
| T 10 | 3,5 | 100 | 195 | 95 | 29 | 6 | 02.5992.1000 | 14,37 |
| T 15 | 3,5 | 100 | 195 | 95 | 29 | 6 | 02.5992.1500 | 14,54 |
| T 20 | 4 | 100 | 195 | 95 | 29 | 6 | 02.5992.2000 | 15,26 |
| T 25 | 4,5 | 100 | 195 | 95 | 29 | 6 | 02.5992.2500 | 15,73 |
| T 30 | 6 | 125 | 230 | 105 | 33 | 6 | 02.5992.3000 | 18,49 |



2C-VDE Screwdriver set 'Slim', 510/50

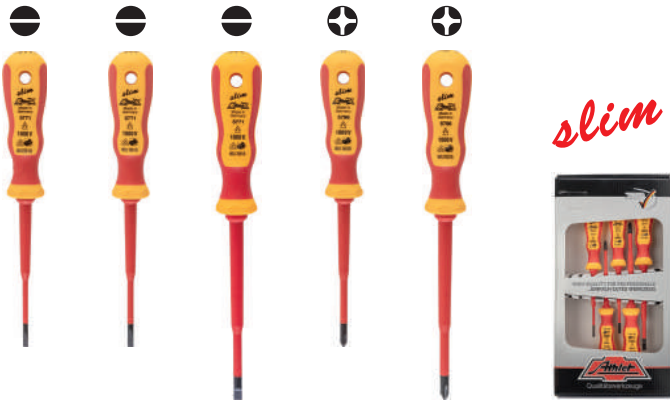


Execution: Set with 2C-VDE Screwdrivers type 'Slim', made of high-grade MoV-steel with a burnished tip, in cardboard packaging.

Application: Easier access to deep-set screws.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|--------------------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 5 pc set 2C VDE 'Slim' Screw drivers | 5771 | 1x SL 3,5 x 100 | 02.5771.0600 | 1 | 02.510.0500 | 62,35 |
| | 5771 | 1x SL 4,0 x 100 | 02.5771.0800 | | | |
| | 5771 | 1x SL 5,5 x 125 | 02.5771.1000 | | | |
| | 5796 | 1x PH 1 x 100 | 02.5796.1000 | | | |
| | 5796 | 1x PH 2 x 125 | 02.5796.2000 | | | |

2C-VDE Screwdriver 'Profi', SL

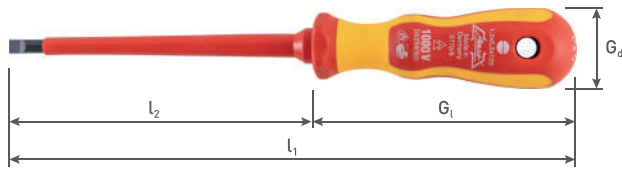


Execution: 2C-VDE Screwdriver, profile SL (Slot). Made of high-grade MoV-steel with a burnished tip.

| Type | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | €/pc |
|------------|-------|-------|-------|-------|--------|--------------|-------------|
| SL 0,4x2,5 | 75 | 160 | 85 | 26 | 12 | 02.5770.0400 | 6,04 |
| SL 0,5x3,0 | 100 | 185 | 85 | 26 | 12 | 02.5770.0500 | 6,42 |
| SL 0,6x3,5 | 100 | 185 | 85 | 26 | 12 | 02.5770.0600 | 6,67 |
| SL 0,8x4,0 | 100 | 195 | 95 | 29 | 12 | 02.5770.0800 | 7,01 |
| SL 1,0x5,5 | 125 | 230 | 105 | 33 | 12 | 02.5770.1000 | 7,40 |
| SL 1,2x6,5 | 150 | 255 | 105 | 33 | 12 | 02.5770.1200 | 8,54 |



2C-VDE Screwdriver 'Profi', PH

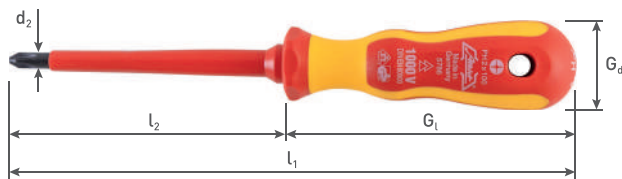


Execution: 2C-VDE Screwdriver, profile PH (Phillips). Made of high-grade MoV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|-------|-------|--------|--------------|-------------|
| PH 0 | 3,5 | 60 | 145 | 85 | 26 | 12 | 02.5786.0000 | 6,50 |
| PH 1 | 5 | 80 | 175 | 95 | 29 | 12 | 02.5786.1000 | 7,48 |
| PH 2 | 6 | 100 | 205 | 105 | 33 | 12 | 02.5786.2000 | 8,97 |



2C-VDE Screwdriver 'Profi', PZ

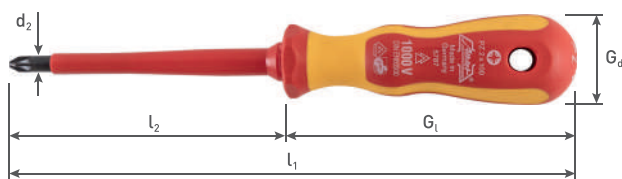

Execution: 2C-VDE Screwdriver, profile PZ (Pozidriv). Made of high-grade MoV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | G_t | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|-------|-------|--------|--------------|-------------|
| PZ 1 | 5 | 80 | 175 | 95 | 29 | 12 | 02.5787.1000 | 7,91 |
| PZ 2 | 6 | 100 | 205 | 105 | 33 | 12 | 02.5787.2000 | 9,65 |



2C-VDE Screwdriver set 'Profi', 510/10



Execution: Set with 2C-VDE Screwdrivers made of high-grade MoV-steel with a burnished tip, in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-------------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 5 pc set 2C VDE Screw drivers | 5770 | 1x SL 3,0 x 100 | 02.5770.0500 | 1 | 02.510.0100 | 41,35 |
| | 5770 | 1x SL 5,5 x 125 | 02.5770.1000 | | | |
| | 5770 | 1x SL 6,5 x 150 | 02.5770.1200 | | | |
| | 5786 | 1x PH 1 x 80 | 02.5786.1000 | | | |
| | 5786 | 1x PH 2 x 100 | 02.5786.2000 | | | |

2C-VDE Screwdriver set 'Profi', 510/11



Execution: Set with 2C-VDE Screwdrivers made of high-grade MoV-steel with a burnished tip, in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-------------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 5 pc set 2C VDE Screw drivers | 5770 | 1x SL 3,0 x 100 | 02.5770.0500 | 1 | 02.510.0110 | 42,37 |
| | 5770 | 1x SL 5,5 x 125 | 02.5770.1000 | | | |
| | 5770 | 1x SL 6,5 x 150 | 02.5770.1200 | | | |
| | 5787 | 1x PZ 1 x 80 | 02.5787.1000 | | | |
| | 5787 | 1x PZ 2 x 100 | 02.5787.2000 | | | |

2C-VDE Screwdriver set 'Profi', 510/13



Execution: Set with 2C-VDE Screwdrivers made of high-grade MoV-steel with a burnished tip, in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-------------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 7 pc set 2C VDE Screw drivers | 5770 | 1x SL 2,5 x 75 | 02.5770.0400 | 1 | 02.510.0130 | 51,77 |
| | 5770 | 1x SL 4,0 x 100 | 02.5770.0800 | | | |
| | 5770 | 1x SL 5,5 x 125 | 02.5770.1000 | | | |
| | 5770 | 1x SL 6,5 x 150 | 02.5770.1200 | | | |
| | 5786 | 1x PH 1 x 80 | 02.5786.1000 | | | |
| | 5786 | 1x PH 2 x 100 | 02.5786.2000 | | | |
| | 992 | 1x SL 0,6 x 60 | 06.992.0010 | | | |

2C-VDE Screwdriver set 'Profi', 510/14




Execution: Set with 2C-VDE Screwdrivers made of high-grade MoV-steel with a burnished tip, in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-------------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 7 pc set 2C VDE Screw drivers | 5770 | 1x SL 2,5 x 75 | 02.5770.0400 | 1 | 02.510.0140 | 52,87 |
| | 5770 | 1x SL 4,0 x 100 | 02.5770.0800 | | | |
| | 5770 | 1x SL 5,5 x 125 | 02.5770.1000 | | | |
| | 5770 | 1x SL 6,5 x 150 | 02.5770.1200 | | | |
| | 5787 | 1x PZ 1 x 80 | 02.5787.1000 | | | |
| | 5787 | 1x PZ 2 x 100 | 02.5787.2000 | | | |
| | 992 | 1x SL 0,6 x 60 | 06.992.0010 | | | |

2C-Screwdriver 'Profi', SL

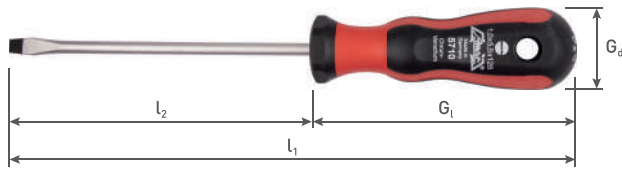

5710




Spade shaped design

Execution: 2C-Workshop screwdriver, profile SL (Slot) according to DIN 5265/ISO 2380. Made of high-grade chrome plated MoV-steel (SL 1,6 CrV-steel) with a burnished tip.

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|-------------|-------|-------|-------|-------|--------|--------------|--------------|
| SL 0,6x4,0 | 75 | 160 | 85 | 26 | 12 | 02.5710.0600 | 6,55 |
| SL 0,8x5,0 | 100 | 195 | 95 | 29 | 12 | 02.5710.0800 | 6,80 |
| SL 1,0x5,5 | 125 | 230 | 105 | 33 | 12 | 02.5710.1000 | 7,23 |
| SL 1,2x6,5 | 150 | 255 | 105 | 33 | 12 | 02.5710.1200 | 9,05 |
| SL 1,2x8,0 | 175 | 295 | 120 | 37 | 12 | 02.5710.1210 | 11,14 |
| SL 1,6x10,0 | 200 | 320 | 120 | 37 | 12 | 02.5710.1605 | 12,24 |

2C-Electrician's screwdriver 'Profi', SL

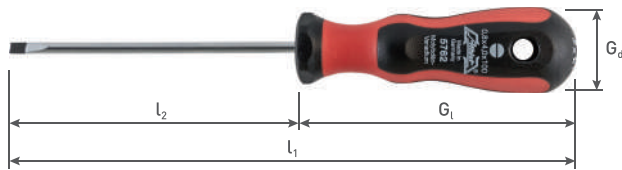

5762




Parallel design

Execution: 2C-Electrician's screwdriver, profile SL (Slot) according to DIN 5265/ISO 2380. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|------------|-------|-------|-------|-------|--------|--------------|-------------|
| SL 0,4x2,5 | 75 | 160 | 85 | 26 | 12 | 02.5762.0405 | 5,48 |
| SL 0,5x3,0 | 75 | 160 | 85 | 26 | 12 | 02.5762.0500 | 5,53 |
| SL 0,8x4,0 | 100 | 195 | 95 | 29 | 12 | 02.5762.0800 | 6,72 |

2C-Screwdriver 'Profi', PH

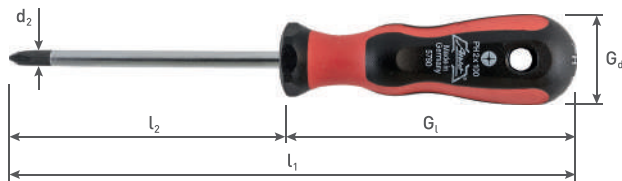


5780

Execution: 2C-Workshop screwdriver, profile PH (Phillips) according to DIN 5262/ISO 8764. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PH 0 | 3,5 | 60 | 145 | 85 | 26 | 12 | 02.5780.0000 | 5,48 |
| PH 1 | 5 | 80 | 175 | 95 | 29 | 12 | 02.5780.1000 | 7,31 |
| PH 2 | 6 | 100 | 205 | 105 | 33 | 12 | 02.5780.2000 | 8,16 |
| PH 2 | 6 | 300 | 405 | 105 | 33 | 6 | 02.5780.2010 | 12,16 |
| PH 3 | 8 | 150 | 270 | 120 | 37 | 6 | 02.5780.3000 | 11,86 |

2C-Screwdriver 'Profi', PZ

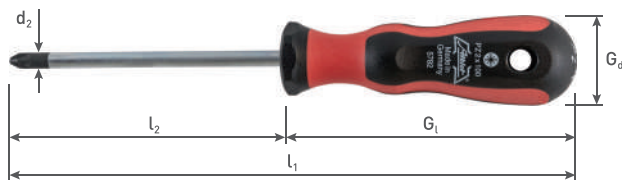


5782

Execution: 2C-Workshop screwdriver, profile PZ (Pozidriv) according to DIN 5262/ISO 8764. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PZ 0 | 3,5 | 60 | 145 | 85 | 26 | 12 | 02.5782.0000 | 6,25 |
| PZ 1 | 5 | 80 | 175 | 95 | 29 | 12 | 02.5782.1000 | 7,65 |
| PZ 2 | 6 | 100 | 205 | 105 | 33 | 12 | 02.5782.2000 | 8,97 |
| PZ 2 | 6 | 300 | 405 | 105 | 33 | 6 | 02.5782.2010 | 12,33 |
| PZ 3 | 8 | 150 | 270 | 120 | 37 | 6 | 02.5782.3000 | 12,58 |

2C-Screwdriver 'Profi', T

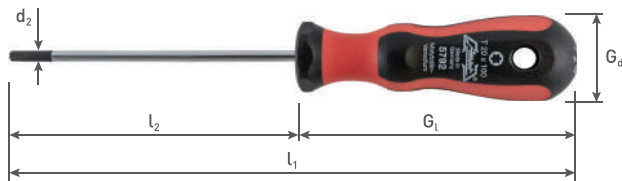


Execution: 2C-Workshop screwdriver, profile T (Torx) according to DIN EN ISO 10664. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|--------------|
| T 6 | 3 | 75 | 160 | 85 | 26 | 12 | 02.5792.0600 | 7,69 |
| T 8 | 3 | 75 | 160 | 85 | 26 | 12 | 02.5792.0800 | 7,69 |
| T 10 | 3 | 80 | 175 | 95 | 29 | 12 | 02.5792.1000 | 8,16 |
| T 15 | 3,5 | 80 | 175 | 95 | 29 | 12 | 02.5792.1500 | 8,46 |
| T 20 | 4 | 100 | 195 | 95 | 29 | 12 | 02.5792.2000 | 8,42 |
| T 25 | 4,5 | 100 | 195 | 95 | 29 | 12 | 02.5792.2500 | 8,71 |
| T 30 | 6 | 115 | 220 | 105 | 33 | 6 | 02.5792.3000 | 9,52 |
| T 40 | 7 | 130 | 250 | 120 | 37 | 6 | 02.5792.4000 | 11,14 |



2C-Screwdriver 'Profi', T-T

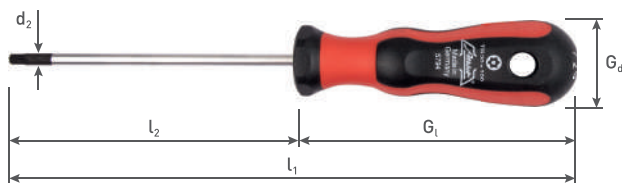


Execution: 2C-Workshop screwdriver, profile T-T (Torx Tamper) according to DIN EN ISO 10664. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|--------|----------------|----------------|----------------|----------------|----------------|--------|--------------|--------------|
| T 10 T | 3 | 80 | 175 | 95 | 29 | 12 | 02.5794.1000 | 9,61 |
| T 15 T | 3,5 | 80 | 175 | 95 | 29 | 12 | 02.5794.1500 | 9,82 |
| T 20 T | 4 | 100 | 195 | 95 | 29 | 12 | 02.5794.2000 | 9,86 |
| T 25 T | 4,5 | 100 | 195 | 95 | 29 | 12 | 02.5794.2500 | 10,03 |
| T 30 T | 6 | 115 | 220 | 105 | 33 | 6 | 02.5794.3000 | 10,92 |



2C-Nail lifter

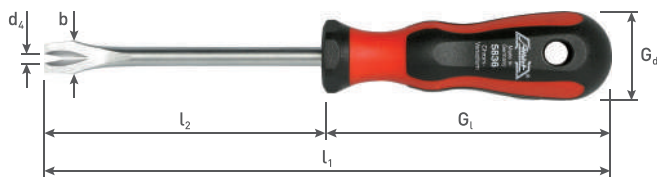


Execution: 2C-Nail lifter. Made of chrome plated high-grade CrV-steel, completely hardenend.

| b | d ₄ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|----|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| 12 | 3 | 100 | 205 | 105 | 33 | 6 | 02.5836.1000 | 8,97 |



2C-Bit screwdriver, magnetic

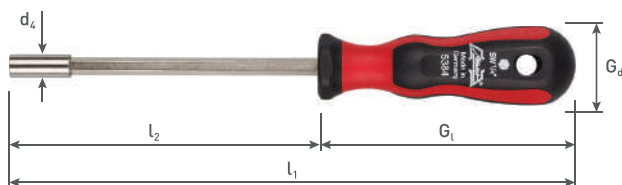

Execution: Bit screwdriver with ergonomical 2C-grip, stainless steel sleeve and a strong permanent magnet.

| SW | l ₂ | l ₁ | d ₄ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|--------------|
| 1/4" | 125 | 230 | 10 | 105 | 33 | 6 | 02.5384.0010 | 14,96 |



2C-Screwdriver set 'Profi', 510/1

Execution: Set with 2C-screwdrivers type 'Profi', in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---------------------------|------|--------------------|------------------|--------|-------------|--------------|
| 6 pc set 2C Screw drivers | 5762 | 1x SL 3,0 x 75 | 02.5762.0500 | 1 | 02.510.0010 | 41,78 |
| | 5710 | 1x SL 5,5 x 125 | 02.5710.1000 | | | |
| | 5710 | 1x SL 6,5 x 150 | 02.5710.1200 | | | |
| | 5780 | 1x PH 1 x 80 | 02.5780.1000 | | | |
| | 5780 | 1x PH 2 x 100 | 02.5780.2000 | | | |
| | 979 | 1x SL 3,5 x 100 GS | 06.979.3500 | | | |

2C-Screwdriver set 'Profi', 510/2

Execution: Set with 2C-screwdrivers type 'Profi', in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---------------------------|------|--------------------|------------------|--------|-------------|--------------|
| 6 pc set 2C Screw drivers | 5762 | 1x SL 3,0 x 75 | 02.5762.0500 | 1 | 02.510.0020 | 42,93 |
| | 5710 | 1x SL 5,5 x 125 | 02.5710.1000 | | | |
| | 5710 | 1x SL 6,5 x 150 | 02.5710.1200 | | | |
| | 5782 | 1x PZ 1 x 80 | 02.5782.1000 | | | |
| | 5782 | 1x PZ 2 x 100 | 02.5782.2000 | | | |
| | 979 | 1x SL 3,5 x 100 GS | 06.979.3500 | | | |


2C-Screwdriver set 'Profi', 510/6

Execution: Set with 2C-screwdrivers type 'Profi', in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|--------------------------------|------|---------------|------------------|--------|-------------|--------------|
| 6 pc set 2C TORX Screw drivers | 5792 | 1x T 10 x 80 | 02.5792.1000 | 1 | 02.510.0060 | 56,95 |
| | 5792 | 1x T 15 x 80 | 02.5792.1500 | | | |
| | 5792 | 1x T 20 x 100 | 02.5792.2000 | | | |
| | 5792 | 1x T 25 x 100 | 02.5792.2500 | | | |
| | 5792 | 1x T 30 x 115 | 02.5792.3000 | | | |
| | 5792 | 1x T 40 x 130 | 02.5792.4000 | | | |

2C-Screwdriver 'Power Punch', SL

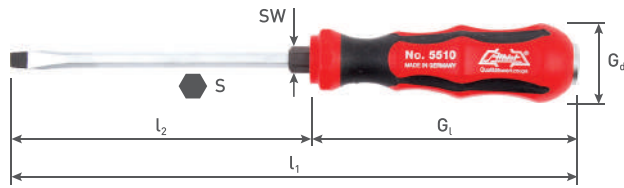


Execution: 2C-Workshop screwdriver 'Power Punch Driver', profile SL (Slot) with blade through the handle and impact plate. Made of hexagonal chrome plated high-grade CrV-steel, completely hardened and with a burnished tip.

Application: For fastening, levering and chiseling.



| Type | l_2 | l_1 | S | SW | G_l | G_d | pcs/PU | Item no. | €/ pc |
|-------------|-------|-------|----|----|-------|-------|--------|--------------|--------------|
| SL 1,0x5,5 | 100 | 210 | 5 | 8 | 110 | 34 | 6 | 02.5510.1000 | 14,79 |
| SL 1,2x6,5 | 125 | 235 | 6 | 10 | 110 | 34 | 6 | 02.5510.1200 | 15,26 |
| SL 1,2x8,0 | 150 | 270 | 8 | 13 | 120 | 37 | 6 | 02.5510.1205 | 18,87 |
| SL 1,6x10,0 | 175 | 295 | 8 | 13 | 120 | 37 | 3 | 02.5510.1600 | 19,38 |
| SL 2,0x12,0 | 200 | 320 | 10 | 16 | 120 | 37 | 3 | 02.5510.2000 | 25,46 |

2C-Screwdriver 'Power Punch', PH

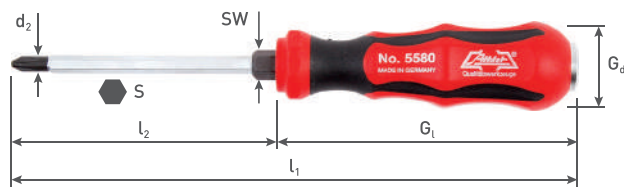


Execution: 2C-Workshop screwdriver 'Power Punch Driver', profile PH (Phillips) with blade through the handle and impact plate. Made of hexagonal chrome plated high-grade MoV-steel, completely hardened and with a burnished tip.

Application: For fastening, levering and chiseling.



| Type | d_2 | l_2 | l_1 | S | SW | G_l | G_d | pcs/PU | Item no. | €/ pc |
|------|-------|-------|-------|---|----|-------|-------|--------|--------------|--------------|
| PH 1 | 5 | 80 | 190 | 5 | 8 | 110 | 34 | 6 | 02.5580.1000 | 14,28 |
| PH 2 | 6 | 100 | 210 | 6 | 10 | 110 | 34 | 6 | 02.5580.2000 | 15,09 |
| PH 3 | 8 | 150 | 270 | 8 | 13 | 120 | 37 | 3 | 02.5580.3000 | 19,13 |

2C-Nail lifter 'Power Punch'

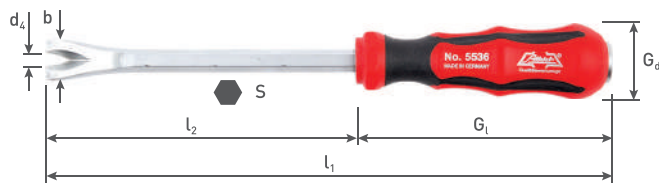

Execution: 2C-Nail lifter 'Power Punch Driver', with blade through the handle and impact plate. Made of chrome plated high-grade CrV-steel, completely hardened.

Application: For levering, chiseling and removing nails.



| b | d_4 | l_2 | l_1 | S | G_l | G_d | pcs/PU | Item no. | €/ pc |
|----|-------|-------|-------|----|-------|-------|--------|--------------|--------------|
| 20 | 8 | 150 | 270 | 10 | 120 | 37 | 3 | 02.5536.0100 | 28,77 |




1C Screwdrivers



A030 1C VDE Screwdriver 'Profi', SL

Execution: 1C VDE Screwdriver, profile SL (Slot). Made of high-grade MoV-steel with a burnished tip.

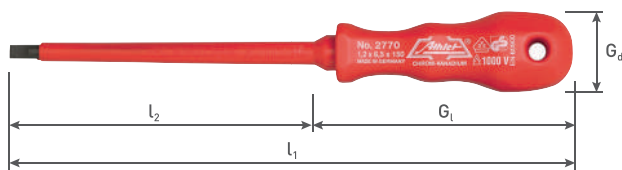


| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------------|-------|-------|-------|-------|--------|--------------|-------------|
| SL 0,4x2,5 | 75 | 145 | 70 | 25 | 12 | 03.2770.0400 | 3,57 |
| SL 0,5x3,0 | 100 | 170 | 70 | 25 | 12 | 03.2770.0500 | 3,61 |
| SL 0,6x3,5 | 100 | 180 | 80 | 28 | 12 | 03.2770.0600 | 4,08 |
| SL 0,8x4,0 | 100 | 190 | 90 | 32 | 12 | 03.2770.0800 | 4,63 |
| SL 1,0x5,5 | 125 | 225 | 100 | 35 | 12 | 03.2770.1000 | 6,63 |
| SL 1,2x6,5 | 150 | 260 | 110 | 37 | 12 | 03.2770.1200 | 8,42 |



1C VDE Screwdriver 'Profi', PH

Execution: 1C VDE Screwdriver, profile PH (Phillips). Made of high-grade MoV-steel with a burnished tip.

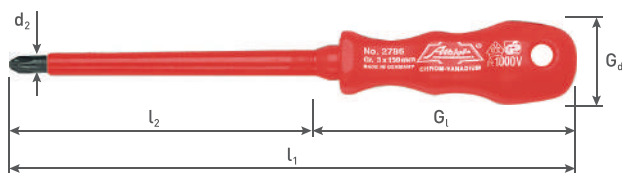


| Type | d_2 | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PH 0 | 3,5 | 60 | 140 | 80 | 28 | 12 | 03.2786.0000 | 4,63 |
| PH 1 | 5 | 80 | 170 | 90 | 32 | 12 | 03.2786.1000 | 5,40 |
| PH 2 | 6 | 100 | 200 | 100 | 35 | 12 | 03.2786.2000 | 6,93 |
| PH 3 | 8 | 150 | 260 | 110 | 37 | 6 | 03.2786.3000 | 10,63 |



1C VDE Screwdriver 'Profi', PZ

Execution: 1C VDE Screwdriver, profile PZ (Pozidriv). Made of high-grade MoV-steel with a burnished tip.

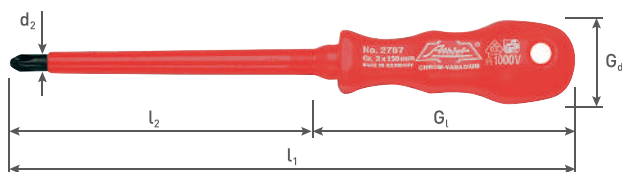

| Type | d_2 | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PZ 0 | 3,5 | 60 | 140 | 80 | 28 | 12 | 03.2787.0000 | 4,93 |
| PZ 1 | 5 | 80 | 170 | 90 | 32 | 12 | 03.2787.1000 | 5,87 |
| PZ 2 | 6 | 100 | 200 | 100 | 35 | 12 | 03.2787.2000 | 7,44 |
| PZ 3 | 8 | 150 | 260 | 110 | 37 | 6 | 03.2787.3000 | 11,99 |




1C VDE Screwdriver set 'Profi', 540/1

Execution: Set with 1C VDE Screwdrivers made of high-grade MoV-steel with a burnished tip, in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 7 pc set VDE Screwdrivers | 2770 | 1x SL 2,5 x 75 | 03.2770.0400 | 1 | 03.540.0010 | 43,99 |
| | 2770 | 1x SL 3,5 x 100 | 03.2770.0600 | | | |
| | 2770 | 1x SL 5,5 x 125 | 03.2770.1000 | | | |
| | 2770 | 1x SL 6,5 x 150 | 03.2770.1200 | | | |
| | 2786 | 1x PH 1 x 80 | 03.2786.1000 | | | |
| | 2786 | 1x PH 2 x 100 | 03.2786.2000 | | | |
| | 972 | 1x SL 3 x 60 GS | 06.972.0300 | | | |

1C Screwdriver 'Profi', SL

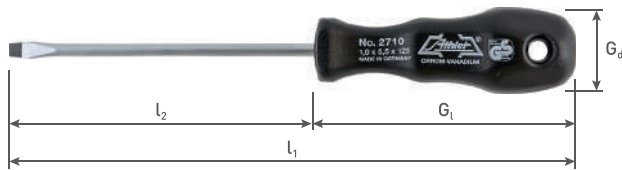


Execution: 1C Workshop screwdriver, profile SL (Slot) according to DIN 5265/ISO 2380. Made of high-grade chrome plated CrV-steel with a burnished tip.

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|-------------|-------|-------|-------|-------|--------|--------------|--------------|
| SL 0,6x4,0 | 75 | 155 | 80 | 28 | 12 | 03.2710.0600 | 4,97 |
| SL 0,8x5,0 | 100 | 190 | 90 | 32 | 12 | 03.2710.0805 | 5,40 |
| SL 1,0x5,5 | 125 | 225 | 100 | 35 | 12 | 03.2710.1005 | 6,46 |
| SL 1,2x6,5 | 150 | 250 | 100 | 35 | 12 | 03.2710.1200 | 7,74 |
| SL 1,2x8,0 | 150 | 260 | 110 | 37 | 12 | 03.2710.1205 | 8,03 |
| SL 1,6x10,0 | 200 | 310 | 110 | 37 | 12 | 03.2710.1605 | 11,35 |




2710



Spade shaped design

1C Electrician's screwdriver 'Profi', SL

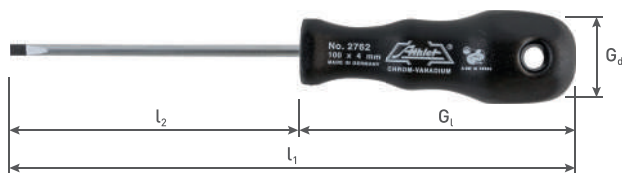

Execution: 1C Electrician's screwdriver, profile SL (Slot) according to DIN 5265/ISO 2380. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------------|-------|-------|-------|-------|--------|--------------|-------------|
| SL 0,4x2,5 | 75 | 145 | 70 | 25 | 12 | 03.2762.0405 | 3,66 |
| SL 0,5x3,0 | 100 | 170 | 70 | 25 | 12 | 03.2762.0505 | 3,87 |
| SL 0,6x3,5 | 100 | 180 | 80 | 28 | 12 | 03.2762.0600 | 3,91 |
| SL 0,8x4,0 | 100 | 190 | 90 | 32 | 12 | 03.2762.0800 | 4,55 |




2762



Parallel design

1C Screwdriver 'Profi', PH

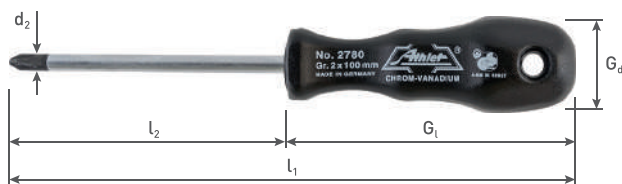

Execution: 1C Workshop screwdriver, profile PH (Phillips) according to DIN 5262/ISO 8764. Made of high-grade chrome plated MoV-steel (PH 4 CrV-steel) with a burnished tip.

| Type | d_2 | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PH 0 | 3,5 | 60 | 140 | 80 | 28 | 12 | 03.2780.0000 | 4,38 |
| PH 1 | 5 | 80 | 170 | 90 | 32 | 12 | 03.2780.1000 | 4,97 |
| PH 2 | 6 | 100 | 200 | 100 | 35 | 12 | 03.2780.2000 | 6,29 |
| PH 3 | 8 | 150 | 260 | 110 | 37 | 6 | 03.2780.3000 | 8,71 |
| PH 4 | 10 | 200 | 320 | 120 | 41 | 6 | 03.2780.4000 | 13,94 |



2780

1C Screwdriver 'Profi', PZ



Execution: 1C Workshop screwdriver, profile PZ (Pozidriv) according to DIN 5262/ISO 8764. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|-------|-------|--------|--------------|--------------|
| PZ 0 | 3,5 | 60 | 140 | 80 | 28 | 12 | 03.2782.0000 | 4,80 |
| PZ 1 | 5 | 80 | 170 | 90 | 32 | 12 | 03.2782.1000 | 5,53 |
| PZ 2 | 6 | 100 | 200 | 100 | 35 | 12 | 03.2782.2000 | 6,97 |
| PZ 3 | 8 | 110 | 260 | 110 | 37 | 6 | 03.2782.3000 | 10,03 |



2782

1C Screwdriver 'Profi', T




Execution: 1C Workshop screwdriver, profile T (Torx) according to DIN EN ISO 10664. Made of high-grade chrome plated MoV-steel with a burnished tip.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| T 8 | 3 | 75 | 145 | 70 | 25 | 12 | 03.2792.0800 | 5,19 |
| T 10 | 3 | 80 | 160 | 80 | 28 | 12 | 03.2792.1000 | 5,48 |
| T 15 | 3,5 | 80 | 160 | 80 | 28 | 12 | 03.2792.1500 | 5,27 |
| T 20 | 4 | 100 | 190 | 90 | 32 | 12 | 03.2792.2000 | 6,04 |
| T 25 | 4,5 | 100 | 190 | 90 | 32 | 12 | 03.2792.2500 | 6,04 |
| T 30 | 6 | 115 | 215 | 100 | 35 | 6 | 03.2792.3000 | 7,18 |



1C Stubby screwdriver 'Profi', SL




Execution: 1C Stubby screwdriver, profile SL (Slot). Made of high-grade chrome plated CrV-steel with a burnished tip.

Application: Ideal for small spaced working areas.

| Type | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| SL 1,0x5,5 | 25 | 75 | 50 | 33 | 12 | 03.2814.1000 | 4,38 |
| SL 1,2x6,5 | 25 | 75 | 50 | 33 | 12 | 03.2814.1200 | 4,97 |



1C Stubby screwdriver 'Profi', PH




Execution: 1C Stubby screwdriver, profile PH (Phillips). Made of high-grade chrome plated MoV-steel with a burnished tip.

Application: Ideal for small spaced working areas.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| PH 1 | 5 | 25 | 75 | 50 | 33 | 12 | 03.2814.1005 | 4,42 |
| PH 2 | 6 | 25 | 75 | 50 | 33 | 12 | 03.2814.2005 | 4,80 |



1C Nail lifter

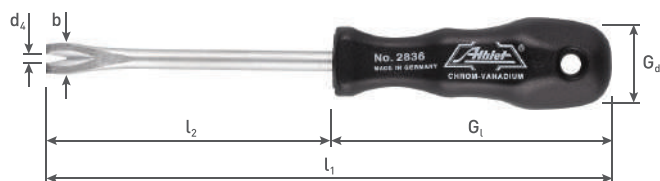


Execution: 1C Nail lifter. Made of chrome plated high-grade CrV-steel, completely hardened.

| b | d ₄ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|----|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| 12 | 3 | 100 | 200 | 100 | 35 | 6 | 03.2836.1000 | 7,23 |



1C Nut setter

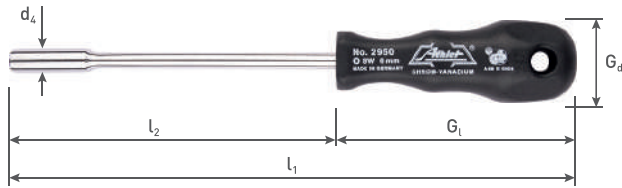


Execution: 1C Nut setter. Made of high-grade chrome plated CrV-steel.

| Type | l_2 | l_1 | d_4 | M | G_l | G_d | pcs/PU | Item no. | €/pc |
|--------|-------|-------|-------|------|-------|-------|--------|--------------|--------------|
| SW 5 | 125 | 215 | 8 | M2,5 | 90 | 32 | 6 | 03.2950.0500 | 7,61 |
| SW 5,5 | 125 | 215 | 8,7 | M3 | 90 | 32 | 6 | 03.2950.0550 | 7,57 |
| SW 6 | 125 | 215 | 9,2 | M3,5 | 90 | 32 | 6 | 03.2950.0600 | 7,69 |
| SW 7 | 125 | 225 | 11 | M4 | 100 | 35 | 6 | 03.2950.0700 | 8,50 |
| SW 8 | 125 | 225 | 12 | M5 | 100 | 35 | 6 | 03.2950.0800 | 8,50 |
| SW 10 | 125 | 225 | 14 | M6 | 100 | 35 | 6 | 03.2950.1000 | 8,84 |
| SW 13 | 125 | 235 | 18 | M8 | 110 | 37 | 6 | 03.2950.1300 | 11,43 |



1C Seal scraper

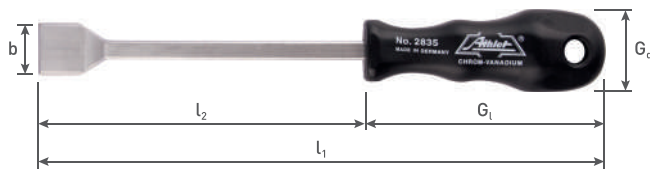

Execution: 1C Seal scraper. Made of CrV-steel.

| b | l_2 | l_1 | G_l | G_d | pcs/PU | Item no. | €/pc |
|----|-------|-------|-------|-------|--------|--------------|--------------|
| 25 | 150 | 260 | 110 | 37 | 6 | 03.2835.0000 | 20,36 |



1C Hand deburrer 90°



Execution: Hand deburrer with 1C-grip. Made of CrV-steel, burnished.

| d_1 | l_2 | l_1 | G_l | G_d | pcs/PU | Item no. | €/pc |
|-------|-------|-------|-------|-------|--------|--------------|-------------|
| 16 | 35 | 135 | 100 | 35 | 6 | 03.2772.2000 | 7,82 |



1C Screwdriver set 'Profi', 530/1

Execution: Set with 1C screwdrivers type 'Profi', in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-----------------------------|------|--------------------|------------------|--------|-------------|--------------|
| 8 pc set Profi Screwdrivers | 2762 | 1x SL 3,0 x 75 | 03.2762.0505 | 1 | 03.530.0010 | 39,61 |
| | 2762 | 1x SL 4,0 x 100 | 03.2762.0800 | | | |
| | 2710 | 1x SL 5,5 x 125 | 03.2710.1000 | | | |
| | 2710 | 1x SL 6,5 x 150 | 03.2710.1200 | | | |
| | 2710 | 1x SL 8,0 x 150 | 03.2710.1205 | | | |
| | 2780 | 1x PH 1 x 80 | 03.2780.1000 | | | |
| | 2780 | 1x PH 2 x 100 | 03.2780.2000 | | | |
| | 979 | 1x SL 3,5 x 100 GS | 06.979.3500 | | | |

1C Screwdriver set 'Profi', 530/4

Execution: Set with 1C screwdrivers type 'Profi', in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-----------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 5 pc set Profi Screwdrivers | 2762 | 1x SL 3,5 x 100 | 03.2762.0600 | 1 | 03.530.0040 | 31,92 |
| | 2710 | 1x SL 5,5 x 125 | 03.2710.1005 | | | |
| | 2710 | 1x SL 6,5 x 150 | 03.2710.1200 | | | |
| | 2780 | 1x PH 1 x 80 | 03.2780.1000 | | | |
| | 2780 | 1x PH 2 x 100 | 03.2780.2000 | | | |

1C Screwdriver set 'Profi', 530/5

Execution: Set with 1C screwdrivers type 'Profi', in cardboard packaging.




| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-----------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 5 pc set Profi Screwdrivers | 2762 | 1x SL 3,5 x 100 | 03.2762.0600 | 1 | 03.530.0050 | 33,15 |
| | 2710 | 1x SL 5,5 x 125 | 03.2710.1005 | | | |
| | 2710 | 1x SL 6,5 x 150 | 03.2710.1200 | | | |
| | 2782 | 1x PZ 1 x 80 | 03.2782.1000 | | | |
| | 2782 | 1x PZ 2 x 100 | 03.2782.1000 | | | |



Mini-screwdrivers with plastic handles

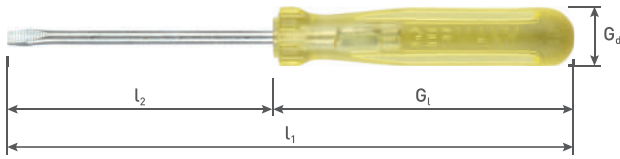

A040
Mini-Screwdriver, SL
Execution: Mini-screwdriver, profile SL (Slot). With transparent plastic handles, blades nickel-plated.


| Type | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|------------|----------------|----------------|----------------|----------------|--------|-------------|-------------|
| SL 0,4x2,0 | 40 | 90 | 50 | 9 | 50 | 04.961.0400 | 0,55 |


961
Screwdriver set 'Mini', 968
Execution: Display stand with 60 radio screwdrivers No. 962

968


| Description | Type | Content | Item no. content | pcs/PU | Item no. | €/PU |
|------------------------------|------|-----------------|------------------|--------|-------------|--------------|
| 60 pc set Radio-screwdrivers | 962 | 20x SL 0,5 x 40 | 04.962.0500 | 1 | 04.968.0000 | 39,23 |
| | 962 | 20x SL 0,5 x 60 | 04.962.0505 | | | |
| | 962 | 20x SL 0,5 x 80 | 04.962.0510 | | | |



Wooden handle screwdrivers




05

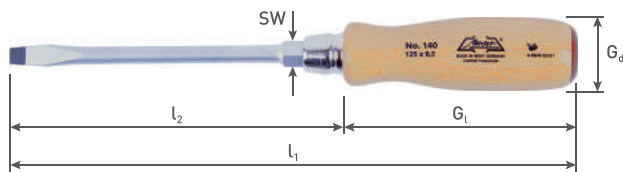A050
Screwdriver wood, SL


Execution: Workshop screwdriver, profile SL (Slot) according to DIN ISO 2380. With ergonomic handle and forged round blade through the handle, with hexagonal base. Made of high-alloy chrome plated CrV-steel with a burnished tip.

| Type | l_2 | l_1 | SW | G_1 | G_d | pcs/PU | Item no. | €/pc |
|-------------|-------|-------|------|-------|-------|--------|-------------|--------------|
| SL 0,6x3,5 | 75 | 170 | - | 95 | 26 | 12 | 05.140.0600 | 6,29 |
| SL 0,8x4,5 | 90 | 185 | - | 95 | 26 | 12 | 05.140.0800 | 6,42 |
| SL 1,0x5,5 | 100 | 200 | 8,0 | 100 | 28 | 12 | 05.140.1000 | 8,29 |
| SL 1,2x6,5 | 125 | 235 | 10,0 | 110 | 30 | 12 | 05.140.1200 | 9,90 |
| SL 1,2x8,0 | 150 | 270 | 13,0 | 120 | 32 | 12 | 05.140.1205 | 13,47 |
| SL 1,6x10,0 | 175 | 300 | 13,0 | 125 | 33 | 12 | 05.140.1600 | 15,81 |
| SL 2,0x12,0 | 200 | 330 | 16,0 | 130 | 33 | 12 | 05.140.2000 | 28,48 |
| SL 2,5x14,0 | 250 | 380 | 16,0 | 130 | 33 | 6 | 05.140.2500 | 31,32 |



140

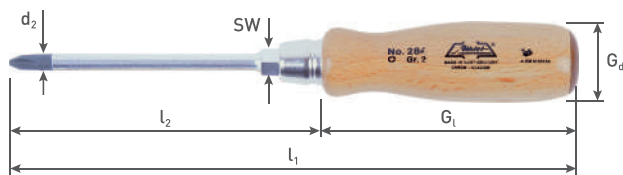Screwdriver wood, PH


Execution: Workshop screwdriver, profile PH (Phillips) according to DIN ISO 8764. With ergonomic handle and forged round blade through the handle, with hexagonal base. Made of high-alloy chrome plated CrV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | SW | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|------|-------|-------|--------|-------------|--------------|
| PH 1 | 4,5 | 80 | 175 | 6,0 | 95 | 26 | 12 | 05.284.1000 | 8,84 |
| PH 2 | 6 | 100 | 210 | 10,0 | 110 | 30 | 12 | 05.284.2000 | 9,52 |
| PH 3 | 8 | 150 | 270 | 13,0 | 120 | 32 | 6 | 05.284.3000 | 10,63 |
| PH 4 | 10 | 200 | 330 | 16,0 | 130 | 33 | 6 | 05.284.4000 | 19,59 |


284

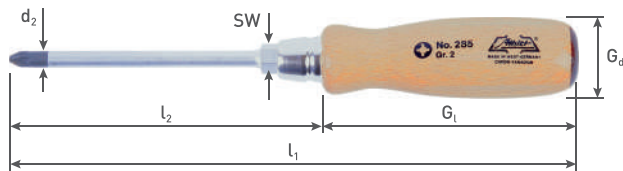Screwdriver wood, PZ


Execution: Workshop screwdriver, profile PZ (Pozidriv) according to DIN ISO 5262. With ergonomic handle and forged round blade through the handle, with hexagonal base. Made of high-alloy chrome plated CrV-steel with a burnished tip.

| Type | d_2 | l_2 | l_1 | SW | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------|-------|-------|-------|------|-------|-------|--------|-------------|--------------|
| PZ 1 | 4,5 | 80 | 175 | 6,0 | 95 | 26 | 12 | 05.285.1000 | 7,99 |
| PZ 2 | 6 | 100 | 210 | 10,0 | 110 | 30 | 12 | 05.285.2000 | 8,93 |
| PZ 3 | 8 | 150 | 270 | 13,0 | 120 | 32 | 6 | 05.285.3000 | 11,69 |


285


Screwdriver set 'Wood', 556/1

Execution: Set of screwdrivers with ergonomic wooden grip, blade through the handle and hexagon drive, in cardboard packaging.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|--|------|-----------------|------------------|--------|-------------|--------------|
| 6 pc set Screwdrivers with wooden handle | 284 | 1x PH 1 x 80 | 05.284.1000 | 1 | 05.556.0010 | 61,07 |
| | 284 | 1x PH 2 x 100 | 05.284.2000 | | | |
| | 140 | 1x SL 3,5 x 75 | 05.140.0600 | | | |
| | 140 | 1x SL 5,5 x 100 | 05.140.1000 | | | |
| | 140 | 1x SL 6,5 x 125 | 05.140.1200 | | | |
| | 140 | 1x SL 8,0 x 150 | 05.140.1205 | | | |




Screwdrivers 'Electronics' and voltage testers



A060
2C-Electronics screwdriver, SL



Execution: 2C-Electronics screwdriver, profile SL (Slot). Made of chrome-plated MoV special steel with a burnished tip, completely hardened. With colour coding system and rotating cap.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|-------------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| SL 0,25x1,2 | 2,5 | 60 | 160 | 100 | 18 | 12 | 06.8710.0205 | 7,65 |
| SL 0,3x1,5 | 2,5 | 60 | 160 | 100 | 18 | 12 | 06.8710.0300 | 6,93 |
| SL 0,4x2,0 | 2,5 | 60 | 160 | 100 | 18 | 12 | 06.8710.0400 | 7,61 |
| SL 0,4x2,5 | 2,5 | 75 | 175 | 100 | 18 | 12 | 06.8710.0405 | 6,42 |
| SL 0,5x3,0 | 3,0 | 100 | 200 | 100 | 18 | 12 | 06.8710.0500 | 6,72 |
| SL 0,6x3,5 | 3,5 | 100 | 200 | 100 | 18 | 6 | 06.8710.0600 | 6,42 |

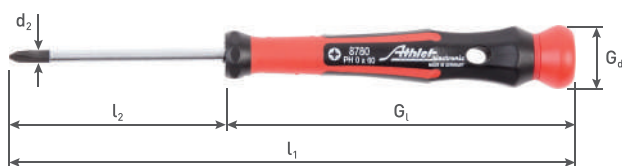
8710
2C-Electronics screwdriver, PH


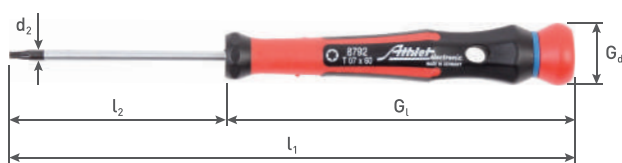
Execution: 2C-Electronics screwdriver, profile PH (Phillips). Made of chrome-plated MoV special steel with a burnished tip, completely hardened. With colour coding system and rotating cap.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|--------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| PH 000 | 2,5 | 60 | 160 | 100 | 18 | 12 | 06.8780.0000 | 8,76 |
| PH 00 | 2,5 | 60 | 160 | 100 | 18 | 12 | 06.8780.0005 | 8,71 |
| PH 0 | 3,5 | 60 | 160 | 100 | 18 | 12 | 06.8780.0010 | 7,06 |

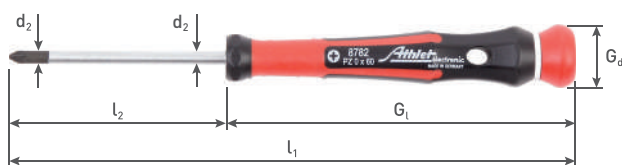
8780
2C-Electronics screwdriver, PZ


Execution: 2C-Electronics screwdriver, profile PZ (Pozidriv). Made of chrome-plated MoV special steel with a burnished tip, completely hardened. With colour coding system and rotating cap.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| PZ 0 | 3,5 | 60 | 160 | 100 | 18 | 12 | 06.8782.0000 | 7,74 |
| PZ 1 | 5,0 | 80 | 180 | 100 | 18 | 12 | 06.8782.1000 | 7,82 |


8782
2C-Electronics screwdriver, T


Execution: 2C-Electronics screwdriver, profile T (Torx). Made of chrome-plated MoV special steel with a burnished tip, completely hardened. With colour coding system and rotating cap.

| Type | d ₂ | l ₂ | l ₁ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| T 5 | 3,0 | 60 | 160 | 100 | 18 | 6 | 06.8792.0500 | 7,52 |
| T 6 | 3,0 | 60 | 160 | 100 | 18 | 6 | 06.8792.0600 | 7,44 |
| T 7 | 3,0 | 60 | 160 | 100 | 18 | 6 | 06.8792.0700 | 7,74 |
| T 8 | 3,0 | 60 | 160 | 100 | 18 | 6 | 06.8792.0800 | 7,44 |
| T 9 | 3,0 | 60 | 160 | 100 | 18 | 6 | 06.8792.0900 | 7,44 |


8792
TORX

1C Electronics screwdriver, SL



Execution: 1C-Electronics screwdriver, profile SL (Slot). Made of chrome-plated MoV special steel with a burnished tip, completely hardened. With colour coding system and rotating cap.

| Type | d ₂ | l ₂ | l ₁ | G _t | G _d | pcs/PU | Item no. | €/ pc |
|-------------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| SL 0,25x1,2 | 2,5 | 60 | 150 | 90 | 22 | 12 | 06.6710.0250 | 5,23 |
| SL 0,3x1,5 | 2,5 | 60 | 150 | 90 | 22 | 12 | 06.6710.0300 | 5,53 |
| SL 0,3x1,8 | 2,5 | 60 | 150 | 90 | 22 | 12 | 06.6710.0305 | 5,53 |
| SL 0,4x2,5 | 2,5 | 75 | 165 | 90 | 22 | 12 | 06.6710.0400 | 4,34 |
| SL 0,5x3,0 | 3,0 | 100 | 190 | 90 | 22 | 12 | 06.6710.0500 | 4,38 |



1C Electronics screwdriver, PH




Execution: 1C-Electronics screwdriver, profile PH (Phillips). Made of chrome-plated MoV special steel with a burnished tip, completely hardened. With colour coding system and rotating cap.

| Type | d ₂ | l ₂ | l ₁ | G _t | G _d | pcs/PU | Item no. | €/ pc |
|--------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| PH 000 | 2,5 | 60 | 150 | 90 | 22 | 12 | 06.6780.0000 | 6,50 |
| PH 00 | 2,5 | 60 | 150 | 90 | 22 | 12 | 06.6780.0005 | 6,80 |
| PH 0 | 3,5 | 60 | 150 | 90 | 22 | 12 | 06.6780.0010 | 4,85 |
| PH 1 | 5,0 | 80 | 170 | 90 | 22 | 12 | 06.6780.1000 | 5,44 |



Euro-type voltage tester

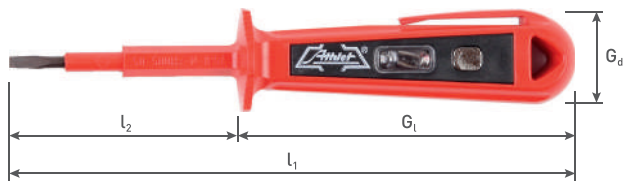

Execution: Euro-type voltage tester, tested according to IEC 60900, short design. Good readability in daylight and outdoors. Including safety zone against slipping off and secured protection against rolling away.

Application: Scope 125V - 250V

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------------|-------|-------|-------|-------|--------|-------------|-------------|
| SL 0,6x3,0 | 60 | 150 | 90 | 27 | 12 | 06.992.0010 | 3,78 |



Voltage tester, short design



Execution: Voltage tester, GS-certified, with insulation and handle from transparent plastic, with metal clip and plastic cap, in plastic wallet. Also available loose and without plastic wallet (Art. 06.300972.03)


Application: Scope 120V - 250V

Remark: Item no. 06.300972.03 is packed in bulk and without poche!

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------------|-------|-------|-------|-------|--------|--------------|-------------|
| SL 0,6x3,0 | 60 | 140 | 80 | 14 | 12 | 06.972.0300 | 1,91 |
| SL 0,6x3,0 | 60 | 140 | 80 | 14 | 60 | 06.300972.03 | 1,28 |



Voltage tester, long design



Execution: Voltage tester, GS-certified, with insulation and handle from transparent plastic, without clip, with brass screw, in plastic wallet. Also available loose and without plastic wallet (Art. 06.300979.35)

Application: Scope 120V - 250V

Remark: Item no. 06.300979.35 is packed in bulk and without poche!

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/pc |
|------------|-------|-------|-------|-------|--------|--------------|-------------|
| SL 0,8x3,5 | 100 | 190 | 90 | 18 | 12 | 06.979.3500 | 2,72 |
| SL 0,8x3,5 | 100 | 190 | 90 | 18 | 36 | 06.300979.35 | 1,96 |



Voltage tester set, short design

Execution: Set of voltage testers, in display

Application: Scope 120V - 250V



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|----------------------------------|------|------------------|------------------|--------|--------------|--------|
| 120 pc set Voltage testers short | 972 | 120x SL 3,0 x 60 | 06.972.0300 | 1 | 06.1972.1200 | 167,24 |

Voltage tester set, long design


Execution: Set of voltage testers, in display

Application: Scope 120V - 250V



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---------------------------------|------|-------------------|------------------|--------|--------------|--------|
| 120 pc set Voltage testers long | 979 | 120x SL 3,5 x 100 | 06.979.3500 | 1 | 06.1979.1200 | 248,84 |

Export voltage tester, short design

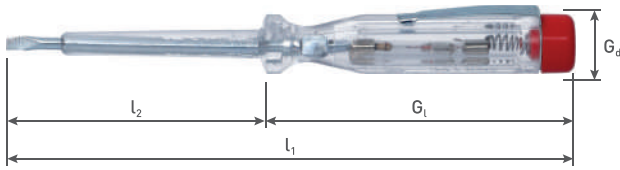


Execution: Voltage tester, not according to VDE, with insulation and handle from transparent plastic, with metal clip and plastic cap.

Application: Scope 100V - 250V

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|------------|-------|-------|-------|-------|--------|-------------|-------|
| SL 0,6x3,0 | 60 | 135 | 75 | 17 | 12 | 06.975.0300 | 1,19 |



Export voltage tester, long design

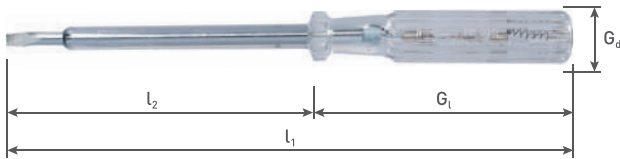


Execution: Voltage tester, not according to VDE, with insulation and handle from transparent plastic, without clip, with brass screw.

Application: Scope 100V - 250V

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|------------|-------|-------|-------|-------|--------|-------------|-------|
| SL 0,8x4,0 | 100 | 190 | 90 | 19 | 12 | 06.977.1000 | 1,79 |



Car light tester

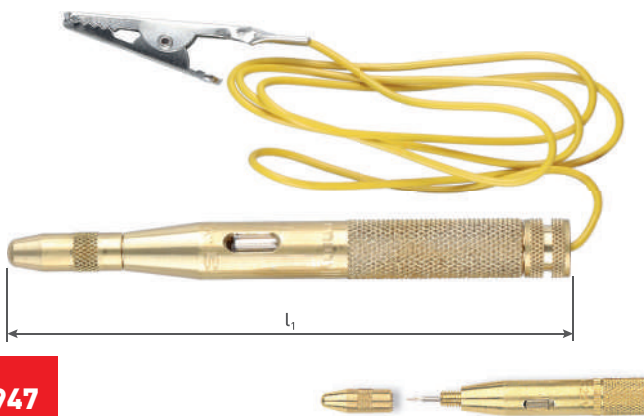

Execution: Car light tester with brass casing and protective cap, with fixed cable and clamp, in plastic wallet.

Application: Scope 6V - 24V

| l_1 | pcs/PU | Item no. | €/ pc |
|-------|--------|-------------|-------|
| 125 | 12 | 06.947.0000 | 9,35 |






Hexagon keys and screwdrivers with T-handle



07

A070
Hexagon key, short


Execution: Hexagon key for hexagon socket screws, made from CrV-steel, fully hardened, nickel-plated, DIN ISO 2936 (DIN 911).

| Type | l ₃ | l ₄ | pcs/PU | Item no. | € / 100 pcs |
|--------|----------------|----------------|--------|------------|----------------|
| SW 0,9 | 32 | 10 | 12 | 07.40.0090 | 52,00 |
| SW 1,3 | 40 | 12 | 12 | 07.40.0130 | 32,00 |
| SW 1,5 | 45 | 14 | 12 | 07.40.0150 | 32,00 |
| SW 2 | 50 | 16 | 12 | 07.40.0200 | 32,00 |
| SW 2,5 | 56 | 18 | 12 | 07.40.0250 | 32,00 |
| SW 3 | 63 | 20 | 12 | 07.40.0300 | 48,00 |
| SW 4 | 70 | 25 | 12 | 07.40.0400 | 60,00 |
| SW 5 | 80 | 28 | 12 | 07.40.0500 | 96,00 |
| SW 6 | 90 | 32 | 12 | 07.40.0600 | 132,00 |
| SW 7 | 95 | 34 | 12 | 07.40.0700 | 180,00 |
| SW 8 | 100 | 36 | 12 | 07.40.0800 | 248,00 |
| SW 10 | 112 | 40 | 12 | 07.40.1000 | 368,00 |
| SW 12 | 125 | 45 | 6 | 07.40.1200 | 564,00 |
| SW 13 | 133 | 50 | 6 | 07.40.1300 | 880,00 |
| SW 14 | 140 | 56 | 6 | 07.40.1400 | 1084,00 |
| SW 16 | 154 | 60 | 2 | 07.40.1600 | 1800,00 |
| SW 17 | 160 | 63 | 2 | 07.40.1700 | 1800,00 |
| SW 19 | 180 | 70 | 2 | 07.40.1900 | 2096,00 |
| SW 22 | 200 | 80 | 1 | 07.40.2200 | 3600,00 |
| SW 24 | 224 | 90 | 1 | 07.40.2400 | 5660,00 |


Hexagon key set, short

Execution: Set of hexagon keys, short version, made from CrV-steel.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---|--|-----------|------------------|--------|------------|--------------|
| 9 pc set Hexagon keys, short, in key holder | 40 | 1x SW 1,5 | 07.40.0150 | 1 | 07.41.0010 | 17,94 |
| | 40 | 1x SW 2 | 07.40.0200 | | | |
| | 40 | 1x SW 2,5 | 07.40.0250 | | | |
| | 40 | 1x SW 3 | 07.40.0300 | | | |
| | 40 | 1x SW 4 | 07.40.0400 | | | |
| | 40 | 1x SW 5 | 07.40.0500 | | | |
| | 40 | 1x SW 6 | 07.40.0600 | | | |
| | 40 | 1x SW 8 | 07.40.0800 | | | |
| | 40 | 1x SW 10 | 07.40.1000 | | | |
| | 9 pc set Hexagon keys, short, in rotary holder | 40 | 1x SW 1,5 | | | |
| 40 | | 1x SW 2 | 07.40.0200 | | | |
| 40 | | 1x SW 2,5 | 07.40.0250 | | | |
| 40 | | 1x SW 3 | 07.40.0300 | | | |
| 40 | | 1x SW 4 | 07.40.0400 | | | |
| 40 | | 1x SW 5 | 07.40.0500 | | | |
| 40 | | 1x SW 6 | 07.40.0600 | | | |
| 40 | | 1x SW 8 | 07.40.0800 | | | |
| 40 | | 1x SW 10 | 07.40.1000 | | | |

Hexagon key, long



Execution: Hexagon key for hexagon socket screws, made from CrV-steel, fully hardened, nickel-plated, DIN ISO 2936 (DIN 911).

| Type | l_3 | l_4 | pcs/PU | Item no. | € / 100 pcs |
|--------|-------|-------|--------|------------|----------------|
| SW 1,5 | 90 | 14 | 12 | 07.48.0150 | 76,00 |
| SW 2 | 100 | 16 | 12 | 07.48.0200 | 76,00 |
| SW 2,5 | 112 | 18 | 12 | 07.48.0250 | 88,00 |
| SW 3 | 126 | 20 | 12 | 07.48.0300 | 96,00 |
| SW 4 | 140 | 25 | 12 | 07.48.0400 | 132,00 |
| SW 5 | 160 | 28 | 12 | 07.48.0500 | 184,00 |
| SW 6 | 180 | 32 | 12 | 07.48.0600 | 244,00 |
| SW 8 | 200 | 36 | 12 | 07.48.0800 | 404,00 |
| SW 10 | 224 | 40 | 12 | 07.48.1000 | 788,00 |
| SW 12 | 250 | 45 | 6 | 07.48.1200 | 1144,00 |
| SW 14 | 280 | 56 | 6 | 07.48.1400 | 1860,00 |
| SW 17 | 320 | 63 | 2 | 07.48.1700 | 2788,00 |
| SW 19 | 360 | 70 | 2 | 07.48.1900 | 3984,00 |
| SW 22 | 400 | 80 | 1 | 07.48.2200 | 3764,00 |
| SW 24 | 448 | 90 | 1 | 07.48.2400 | 5716,00 |

Hexagon key set, long




Execution: Set of hexagon keys, long version, made from CrV-steel.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---|------|-----------|------------------|--------|------------|--------------|
| 9 pc set Hexagon keys, long, in key holder | 48 | 1x SW 1,5 | 07.48.0150 | 1 | 07.41.0030 | 25,25 |
| | 48 | 1x SW 2 | 07.48.0200 | | | |
| | 48 | 1x SW 2,5 | 07.48.0250 | | | |
| | 48 | 1x SW 3 | 07.48.0300 | | | |
| | 48 | 1x SW 4 | 07.48.0400 | | | |
| | 48 | 1x SW 5 | 07.48.0500 | | | |
| | 48 | 1x SW 6 | 07.48.0600 | | | |
| | 48 | 1x SW 8 | 07.48.0800 | | | |
| | 48 | 1x SW 10 | 07.48.1000 | | | |
| 9 pc set Hexagon keys, long, in rotary holder | 48 | 1x SW 1,5 | 07.48.0150 | 1 | 07.42.0070 | 26,78 |
| | 48 | 1x SW 2 | 07.48.0200 | | | |
| | 48 | 1x SW 2,5 | 07.48.0250 | | | |
| | 48 | 1x SW 3 | 07.48.0300 | | | |
| | 48 | 1x SW 4 | 07.48.0400 | | | |
| | 48 | 1x SW 5 | 07.48.0500 | | | |
| | 48 | 1x SW 6 | 07.48.0600 | | | |
| | 48 | 1x SW 8 | 07.48.0800 | | | |
| | 48 | 1x SW 10 | 07.48.1000 | | | |

Hexagon key, ball point head, long



Execution: Hexagon key with ball point head, made from CrV-steel, fully hardened, nickel-plated.



55



Ball point head

| Type | l_3 | l_4 | pcs/PU | Item no. | € / 100 pcs |
|--------|-------|-------|--------|------------|----------------|
| SW 1,5 | 90 | 14 | 12 | 07.55.0150 | 124,00 |
| SW 2 | 100 | 16 | 12 | 07.55.0200 | 132,00 |
| SW 2,5 | 112 | 18 | 12 | 07.55.0250 | 140,00 |
| SW 3 | 126 | 20 | 12 | 07.55.0300 | 148,00 |
| SW 4 | 140 | 25 | 12 | 07.55.0400 | 200,00 |
| SW 5 | 160 | 28 | 12 | 07.55.0500 | 248,00 |
| SW 6 | 180 | 32 | 12 | 07.55.0600 | 320,00 |
| SW 8 | 200 | 36 | 12 | 07.55.0800 | 556,00 |
| SW 10 | 224 | 40 | 12 | 07.55.1000 | 696,00 |
| SW 12 | 250 | 45 | 6 | 07.55.1200 | 1328,00 |
| SW 14 | 280 | 56 | 6 | 07.55.1400 | 1896,00 |
| SW 17 | 320 | 63 | 6 | 07.55.1700 | 3104,00 |
| SW 19 | 360 | 70 | 6 | 07.55.1900 | 3036,00 |

Hexagon key set, with ball point head, long



Execution: Set of hexagon keys with ball point head, long version, made from CrV-steel.



41
/4


42
/8



Ball point head

| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---|------|-----------|------------------|--------|------------|--------------|
| 9 pc set Hexagon keys long with ball point head, in key holder | 55 | 1x SW 1,5 | 07.55.0150 | 1 | 07.41.0040 | 36,21 |
| | 55 | 1x SW 2 | 07.55.0200 | | | |
| | 55 | 1x SW 2,5 | 07.55.0250 | | | |
| | 55 | 1x SW 3 | 07.55.0300 | | | |
| | 55 | 1x SW 4 | 07.55.0400 | | | |
| | 55 | 1x SW 5 | 07.55.0500 | | | |
| | 55 | 1x SW 6 | 07.55.0600 | | | |
| | 55 | 1x SW 8 | 07.55.0800 | | | |
| | 55 | 1x SW 10 | 07.55.1000 | | | |
| 9 pc set Hexagon keys long with ball point head, in rotary holder | 55 | 1x SW 1,5 | 07.55.0150 | 60 | 07.42.0080 | 37,74 |
| | 55 | 1x SW 2 | 07.55.0200 | | | |
| | 55 | 1x SW 2,5 | 07.55.0250 | | | |
| | 55 | 1x SW 3 | 07.55.0300 | | | |
| | 55 | 1x SW 4 | 07.55.0400 | | | |
| | 55 | 1x SW 5 | 07.55.0500 | | | |
| | 55 | 1x SW 6 | 07.55.0600 | | | |
| | 55 | 1x SW 8 | 07.55.0800 | | | |
| | 55 | 1x SW 10 | 07.55.1000 | | | |

Torx-key, long



Execution: Key for TORX® screws, made from MoV-steel, fully hardened, nickel-plated, DIN EN ISO 10664.

| Type | l ₃ | l ₄ | pcs/PU | Item no. | € / 100 pcs |
|------|----------------|----------------|--------|------------|---------------|
| T 15 | 54 | 18 | 12 | 07.49.1500 | 216,00 |
| T 20 | 57 | 19 | 12 | 07.49.2000 | 224,00 |
| T 25 | 63 | 20 | 12 | 07.49.2500 | 232,00 |



Torxkey set, long, 42/6



Execution: Set of keys for TORX® screws, made from MoV-steel, in an ergonomic rotary holder for easy selection of the keys, detachable EURO hole hanger.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|--------------------|------|---------|------------------|--------|------------|--------------|
| 8 pc set TORX keys | 49 | 1x T 9 | 07.49.0900 | 1 | 07.42.0060 | 43,61 |
| | 49 | 1x T 10 | 07.49.1000 | | | |
| | 49 | 1x T 15 | 07.49.1500 | | | |
| | 49 | 1x T 20 | 07.49.2000 | | | |
| | 49 | 1x T 25 | 07.49.2500 | | | |
| | 49 | 1x T 27 | 07.49.2700 | | | |
| | 49 | 1x T 30 | 07.49.3000 | | | |
| | 49 | 1x T 40 | 07.49.4000 | | | |


Hexagon key set, inch, short, 42/9

Execution: Set of hexagon keys, made from CrV-steel, in an ergonomic rotary holder for easy selection of the keys, detachable EURO hole hanger.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-----------------------------|------|-------------|------------------|--------|------------|--------------|
| 10 pc set Hexagon keys inch | 50 | 1x SW 1/16" | 07.50.0159 | 1 | 07.42.0090 | 21,68 |
| | 50 | 1x SW 5/64" | 07.50.0198 | | | |
| | 50 | 1x SW 3/32" | 07.50.0238 | | | |
| | 50 | 1x SW 1/8" | 07.50.0318 | | | |
| | 50 | 1x SW 5/32" | 07.50.0397 | | | |
| | 50 | 1x SW 3/16" | 07.50.0476 | | | |
| | 50 | 1x SW 7/32" | 07.50.0556 | | | |
| | 50 | 1x SW 1/4" | 07.50.0635 | | | |
| | 50 | 1x SW 5/16" | 07.50.0794 | | | |
| | 50 | 1x SW 3/8" | 07.50.0953 | | | |

Hexagon key with T-handle

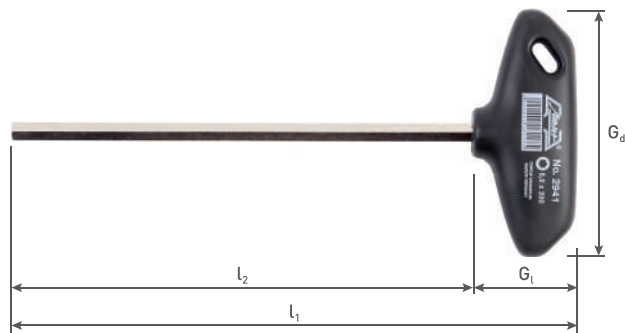


Execution: Hexagon key with ergonomic T-handle made from special plastic of high impact strength, provided with a hole, blade made of CrV-steel. Chamfered (from 3.0mm), nickel-plated.

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|--------|-------|-------|-------|-------|--------|--------------|-------------|
| SW 2 | 100 | 130 | 30 | 70 | 6 | 07.2941.0200 | 3,70 |
| SW 2,5 | 100 | 130 | 30 | 70 | 6 | 07.2941.0250 | 3,78 |
| SW 3 | 100 | 130 | 30 | 70 | 6 | 07.2941.0300 | 3,95 |
| SW 4 * | 100 | 140 | 40 | 90 | 6 | 07.2941.0400 | 4,21 |
| SW 5 | 100 | 140 | 40 | 90 | 6 | 07.2941.0500 | 4,97 |
| SW 6 | 100 | 140 | 40 | 90 | 6 | 07.2941.0600 | 5,53 |
| SW 3 | 150 | 180 | 30 | 70 | 6 | 07.2941.0301 | 4,34 |
| SW 4 | 150 | 190 | 40 | 90 | 6 | 07.2941.0401 | 5,06 |
| SW 5 | 150 | 190 | 40 | 90 | 6 | 07.2941.0501 | 5,82 |
| SW 6 | 150 | 190 | 40 | 90 | 6 | 07.2941.0601 | 6,25 |
| SW 8 | 150 | 195 | 45 | 110 | 6 | 07.2941.0801 | 9,05 |
| SW 3 | 200 | 230 | 30 | 70 | 6 | 07.2941.0302 | 4,46 |
| SW 4 | 200 | 240 | 40 | 90 | 6 | 07.2941.0402 | 5,10 |
| SW 5 | 200 | 240 | 40 | 90 | 6 | 07.2941.0502 | 6,25 |
| SW 6 | 200 | 240 | 40 | 90 | 6 | 07.2941.0602 | 7,14 |

* Phase-out item, available until stock has depleted



Hexagon socket wrench key with T-handle

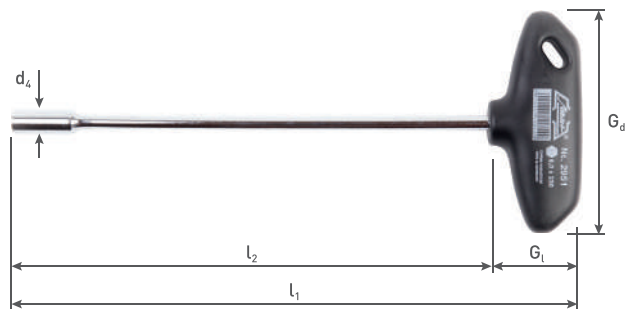


Execution: Hexagon socket wrench key with ergonomic T-handle made from special plastic of high impact strength, provided with a hole, blade made from high-alloy CrV special steel, chrome-plated. According to DIN 3125.

| Type | l_2 | l_1 | d_4 | M | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|--------|-------|-------|-------|-----|-------|-------|--------|--------------|--------------|
| SW 5,5 | 125 | 165 | 8,8 | M3 | 40 | 90 | 6 | 07.2951.0550 | 7,78 |
| SW 7 | 125 | 165 | 11 | M4 | 40 | 90 | 6 | 07.2951.0700 | 8,42 |
| SW 8 | 125 | 170 | 12 | M5 | 45 | 110 | 6 | 07.2951.0800 | 10,03 |
| SW 9 | 125 | 170 | 13 | - | 45 | 110 | 6 | 07.2951.0900 | 9,01 |
| SW 10 | 125 | 170 | 14,6 | M6 | 45 | 110 | 6 | 07.2951.1000 | 10,50 |
| SW 11 | 125 | 170 | 16 | M7 | 45 | 110 | 6 | 07.2951.1100 | 11,56 |
| SW 12 | 125 | 170 | 17 | M8 | 45 | 110 | 6 | 07.2951.1200 | 10,12 |
| SW 13 | 125 | 170 | 17,9 | M8 | 45 | 110 | 6 | 07.2951.1300 | 11,09 |
| SW 17 | 125 | 170 | 23,1 | M10 | 45 | 110 | 6 | 07.2951.1700 | 12,84 |



Key for Torx screws with T-handle

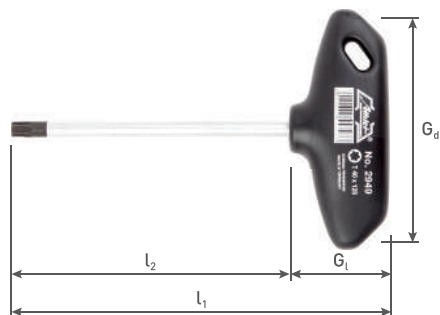

Execution: Key for TORX® screws with ergonomic T-handle made from special plastic of high impact strength, provided with a hole, blade made from MoV steel, chrome-plated with burnished tip. According to DIN EN ISO 10664.

| Type | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | €/ pc |
|------|-------|-------|-------|-------|--------|--------------|-------------|
| T 10 | 100 | 140 | 40 | 90 | 6 | 07.2949.1000 | 5,65 |
| T 15 | 100 | 140 | 40 | 90 | 6 | 07.2949.1500 | 7,18 |
| T 20 | 125 | 165 | 40 | 90 | 6 | 07.2949.2001 | 7,82 |
| T 25 | 125 | 165 | 40 | 90 | 6 | 07.2949.2501 | 8,03 |
| T 30 | 125 | 165 | 40 | 90 | 6 | 07.2949.3001 | 6,46 |



Hexagon key set, with T-handle

Execution: Set of hexagon keys with ergonomic T-handle made from special plastic of high impact strength, provided with a hole, blade made of CrV steel, nickel-plated.



| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|-------------------------------------|------|-----------------|------------------|--------|--------------|--------------|
| 8 pc set Hexagon keys with T-handle | 2941 | 1x SW 2 x 100 | 07.2941.0200 | 1 | 07.2941.0100 | 49,73 |
| | 2941 | 1x SW 2,5 x 100 | 07.2941.0250 | | | |
| | 2941 | 1x SW 3 x 100 | 07.2941.0300 | | | |
| | 2941 | 1x SW 4 x 150 | 07.2941.0401 | | | |
| | 2941 | 1x SW 5 x 150 | 07.2941.0501 | | | |
| | 2941 | 1x SW 6 x 150 | 07.2941.0601 | | | |
| | 2941 | 1x SW 8 x 200 | 07.2941.0802 | | | |
| | 2941 | 1x SW 10 x 200 | 07.2941.1002 | | | |



Bits and bitholders



800

Screwdriving bit PH, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------|
| PH 0 | 25 | 2 | 800.0002 | 1,56 |
| PH 1 | 25 | 2 | 800.00012 | 1,56 |
| PH 2 | 25 | 2 | 800.00022 | 1,56 |
| PH 3 | 25 | 2 | 800.00032 | 1,56 |
| PH 0 | 25 | 10 | 800.0000 | 5,70 |
| PH 1 | 25 | 10 | 800.0001 | 5,70 |
| PH 2 | 25 | 10 | 800.0002 | 5,70 |
| PH 3 | 25 | 10 | 800.0003 | 5,70 |
| PH 1 | 25 | 50 | 800.00015 | 25,95 |
| PH 2 | 25 | 50 | 800.00025 | 25,95 |



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with reduced tip.

Application: Ideal for screws for gypsum boards or so called trumpet screws.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|--------|
| PH 2R | 25 | 2 | 800.00052 | 1,66 |
| PH 2R | 25 | 10 | 800.0005 | 6,25 |



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with reduced tip, with TiN-coating.

Application: Ideal for screws for gypsum boards or so called trumpet screws.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|--------|
| PH 2R | 25 | 2 | 800.00062 | 3,27 |
| PH 2R | 25 | 10 | 800.0006 | 14,25 |



Execution: Screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PH (Phillips), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|--------|
| PH 1 * | 25 | 2 | 800.10012 | 5,09 |
| PH 2 * | 25 | 2 | 800.10022 | 5,09 |
| PH 1 * | 25 | 10 | 800.1001 | 23,35 |
| PH 2 * | 25 | 10 | 800.1002 | 23,35 |
| PH 3 * | 25 | 10 | 800.1003 | 23,35 |


* Phase-out item, available until stock has depleted



Execution: Screwdriving bit 'Inox+' with C6.3 bit connection, profile PH (Phillips), high-alloy stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 25 | 2 | 800.11012 | 5,50 |
| PH 2 | 25 | 2 | 800.11022 | 5,50 |
| PH 3 | 25 | 2 | 800.11032 | 5,50 |
| PH 1 | 25 | 10 | 800.1101 | 24,95 |
| PH 2 | 25 | 10 | 800.1102 | 24,95 |
| PH 3 | 25 | 10 | 800.1103 | 24,95 |



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 25 | 2 | 800.20012 | 3,94 |
| PH 2 | 25 | 2 | 800.20022 | 3,94 |
| PH 3 | 25 | 2 | 800.20032 | 3,94 |
| PH 1 | 25 | 10 | 800.2001 | 17,65 |
| PH 2 | 25 | 10 | 800.2002 | 17,65 |
| PH 3 | 25 | 10 | 800.2003 | 17,65 |



Execution: Screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PH (Phillips).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 25 | 2 | 800.30012 | 7,17 |
| PH 2 | 25 | 2 | 800.30022 | 7,17 |
| PH 3 | 25 | 2 | 800.30032 | 7,17 |
| PH 1 | 25 | 10 | 800.3001 | 33,76 |
| PH 2 | 25 | 10 | 800.3002 | 33,76 |
| PH 3 | 25 | 10 | 800.3003 | 33,76 |



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PH (Phillips).

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 25 | 2 | 801.00012 | 3,16 |
| PH 2 | 25 | 2 | 801.00022 | 3,16 |
| PH 3 | 25 | 2 | 801.00032 | 3,16 |
| PH 1 | 25 | 10 | 801.0001 | 13,71 |
| PH 2 | 25 | 10 | 801.0002 | 13,71 |
| PH 3 | 25 | 10 | 801.0003 | 13,71 |



Execution: Torsion screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PH (Phillips), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|--------------|
| PH 1 * | 25 | 2 | 801.10012 | 7,10 |
| PH 2 * | 25 | 2 | 801.10022 | 7,10 |
| PH 3 * | 25 | 2 | 801.10032 | 7,10 |
| PH 1 * | 25 | 10 | 801.1001 | 33,44 |
| PH 2 * | 25 | 10 | 801.1002 | 33,44 |
| PH 3 * | 25 | 10 | 801.1003 | 33,44 |

* Phase-out item, available until stock has depleted



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PH (Phillips), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 25 | 2 | 801.20012 | 6,01 |
| PH 2 | 25 | 2 | 801.20022 | 6,01 |
| PH 3 | 25 | 2 | 801.20032 | 6,01 |
| PH 1 | 25 | 10 | 801.2001 | 27,96 |
| PH 2 | 25 | 10 | 801.2002 | 27,96 |
| PH 3 | 25 | 10 | 801.2003 | 27,96 |



Execution: Torsion screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PH (Phillips).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 25 | 2 | 801.30012 | 8,15 |
| PH 2 | 25 | 2 | 801.30022 | 8,15 |
| PH 3 | 25 | 2 | 801.30032 | 8,15 |
| PH 1 | 25 | 10 | 801.3001 | 38,70 |
| PH 2 | 25 | 10 | 801.3002 | 38,70 |
| PH 3 | 25 | 10 | 801.3003 | 38,70 |


Execution: Screwdriving bit with E6.3 bit connection, profile PH (Phillips).

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| PH 1 | 50 | 2 | 802.00012 | 3,07 |
| PH 2 | 50 | 2 | 802.00022 | 3,07 |
| PH 3 | 50 | 2 | 802.00032 | 3,07 |
| PH 1 | 70 | 1 | 802.00041 | 2,51 |
| PH 2 | 70 | 1 | 802.00051 | 2,51 |
| PH 3 | 70 | 1 | 802.00061 | 2,51 |
| PH 1 | 89 | 1 | 802.00071 | 3,06 |
| PH 2 | 89 | 1 | 802.00081 | 3,06 |
| PH 3 | 89 | 1 | 802.00091 | 3,06 |
| PH 1 | 110 | 1 | 802.00101 | 5,02 |
| PH 2 | 110 | 1 | 802.00111 | 5,02 |
| PH 3 | 110 | 1 | 802.00121 | 5,02 |
| PH 1 | 127 | 1 | 802.00131 | 5,42 |
| PH 2 | 127 | 1 | 802.00141 | 5,42 |
| PH 3 | 127 | 1 | 802.00151 | 5,42 |
| PH 1 | 152 | 1 | 802.00161 | 6,86 |
| PH 2 | 152 | 1 | 802.00171 | 6,86 |
| PH 3 | 152 | 1 | 802.00181 | 6,86 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| PH 1 | 50 | 10 | 802.0001 | 13,26 |
| PH 2 | 50 | 10 | 802.0002 | 13,26 |
| PH 3 | 50 | 10 | 802.0003 | 13,26 |
| PH 1 | 70 | 10 | 802.0004 | 20,50 |
| PH 2 | 70 | 10 | 802.0005 | 20,50 |
| PH 3 | 70 | 10 | 802.0006 | 20,50 |
| PH 1 | 89 | 10 | 802.0007 | 25,86 |
| PH 2 | 89 | 10 | 802.0008 | 25,86 |
| PH 3 | 89 | 10 | 802.0009 | 25,86 |
| PH 1 | 110 | 10 | 802.0010 | 44,94 |
| PH 2 | 110 | 10 | 802.0011 | 44,94 |
| PH 3 | 110 | 10 | 802.0012 | 44,94 |
| PH 1 | 127 | 10 | 802.0013 | 48,34 |
| PH 2 | 127 | 10 | 802.0014 | 48,34 |
| PH 3 | 127 | 10 | 802.0015 | 48,34 |
| PH 1 | 152 | 10 | 802.0016 | 62,59 |
| PH 2 | 152 | 10 | 802.0017 | 62,59 |
| PH 3 | 152 | 10 | 802.0018 | 62,59 |

Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 803.00012 | 1,56 |
| PZ 2 | 25 | 2 | 803.00022 | 1,56 |
| PZ 3 | 25 | 2 | 803.00032 | 1,56 |
| PZ 1 | 25 | 10 | 803.0001 | 5,70 |
| PZ 2 | 25 | 10 | 803.0002 | 5,70 |
| PZ 3 | 25 | 10 | 803.0003 | 5,70 |
| PZ 1 | 25 | 50 | 803.00015 | 25,95 |
| PZ 2 | 25 | 50 | 803.00025 | 25,95 |
| PZ 3 | 25 | 50 | 803.00035 | 25,95 |


Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with reduced tip.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|-------------|
| PZ 2R | 25 | 2 | 803.00052 | 2,06 |
| PZ 2R | 25 | 10 | 803.0005 | 8,23 |


Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with reduced tip, with TiN-coating.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|--------------|
| PZ 2R | 25 | 2 | 803.00062 | 3,44 |
| PZ 2R | 25 | 10 | 803.0006 | 15,79 |


Execution: Screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PZ (Pozidriv), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|--------------|
| PZ 1 * | 25 | 2 | 803.10012 | 4,78 |
| PZ 2 * | 25 | 2 | 803.10022 | 4,78 |
| PZ 3 * | 25 | 2 | 803.10032 | 4,78 |
| PZ 1 * | 25 | 10 | 803.1001 | 21,81 |
| PZ 2 * | 25 | 10 | 803.1002 | 21,81 |
| PZ 3 * | 25 | 10 | 803.1003 | 21,81 |

* Phase-out item, available until stock has depleted


Execution: Screwdriving bit 'Inox+' with C6.3 bit connection, profile PZ (Pozidriv), high-alloy stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 803.11012 | 5,50 |
| PZ 2 | 25 | 2 | 803.11022 | 5,50 |
| PZ 3 | 25 | 2 | 803.11032 | 5,50 |
| PZ 1 | 25 | 10 | 803.1101 | 24,95 |
| PZ 2 | 25 | 10 | 803.1102 | 24,95 |
| PZ 3 | 25 | 10 | 803.1103 | 24,95 |



Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 803.20012 | 4,93 |
| PZ 2 | 25 | 2 | 803.20022 | 4,93 |
| PZ 3 | 25 | 2 | 803.20032 | 4,93 |
| | | | | |
| PZ 1 | 25 | 10 | 803.2001 | 22,58 |
| PZ 2 | 25 | 10 | 803.2002 | 22,58 |
| PZ 3 | 25 | 10 | 803.2003 | 22,58 |



Execution: Screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PZ (Pozidriv).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 803.30012 | 7,17 |
| PZ 2 | 25 | 2 | 803.30022 | 7,17 |
| PZ 3 | 25 | 2 | 803.30032 | 7,17 |
| | | | | |
| PZ 1 | 25 | 10 | 803.3001 | 33,76 |
| PZ 2 | 25 | 10 | 803.3002 | 33,76 |
| PZ 3 | 25 | 10 | 803.3003 | 33,76 |

804

Torsion screwdriving bit PZ, C6.3

ROTEC



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv).

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 804.00012 | 2,69 |
| PZ 2 | 25 | 2 | 804.00022 | 2,69 |
| PZ 3 | 25 | 2 | 804.00032 | 2,69 |
| | | | | |
| PZ 1 | 25 | 10 | 804.0001 | 11,40 |
| PZ 2 | 25 | 10 | 804.0002 | 11,40 |
| PZ 3 | 25 | 10 | 804.0003 | 11,40 |




Execution: Torsion screwdriving bit 'Anti-Cor' with C6.3 connection, profile PZ (Pozidriv), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|--------|----------------|--------|-----------|--------------|
| PZ 1 * | 25 | 2 | 804.10012 | 5,88 |
| PZ 2 * | 25 | 2 | 804.10022 | 5,88 |
| PZ 3 * | 25 | 2 | 804.10032 | 5,88 |
| | | | | |
| PZ 2 * | 25 | 10 | 804.1002 | 27,29 |
| PZ 3 * | 25 | 10 | 804.1003 | 27,29 |


* Phase-out item, available until stock has depleted



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 804.20012 | 6,01 |
| PZ 2 | 25 | 2 | 804.20022 | 6,01 |
| PZ 3 | 25 | 2 | 804.20032 | 6,01 |
| PZ 1 | 25 | 10 | 804.2001 | 27,96 |
| PZ 2 | 25 | 10 | 804.2002 | 27,96 |
| PZ 3 | 25 | 10 | 804.2003 | 27,96 |

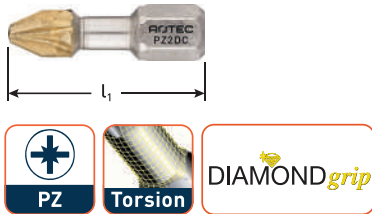

Execution: Torsion screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PZ (Pozidriv).


Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PZ 1 | 25 | 2 | 804.30012 | 8,00 |
| PZ 2 | 25 | 2 | 804.30022 | 8,00 |
| PZ 3 | 25 | 2 | 804.30032 | 8,00 |
| PZ 1 | 25 | 10 | 804.3001 | 37,93 |
| PZ 2 | 25 | 10 | 804.3002 | 37,93 |
| PZ 3 | 25 | 10 | 804.3003 | 37,93 |

805

Screwdriving bit PZ, E6.3


ROTTEC

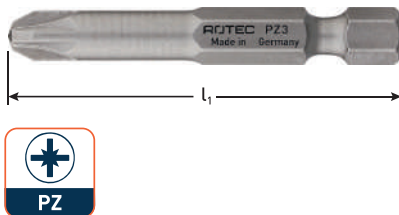

Execution: Screwdriving bit with E6.3 bit connection, profile PZ (Pozidriv).

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| PZ 1 | 50 | 2 | 805.00012 | 3,07 |
| PZ 2 | 50 | 2 | 805.00022 | 3,07 |
| PZ 3 | 50 | 2 | 805.00032 | 3,07 |
| PZ 1 | 70 | 1 | 805.00041 | 2,52 |
| PZ 2 | 70 | 1 | 805.00051 | 2,52 |
| PZ 3 | 70 | 1 | 805.00061 | 2,52 |
| PZ 1 | 89 | 1 | 805.00071 | 3,07 |
| PZ 2 | 89 | 1 | 805.00081 | 3,07 |
| PZ 3 | 89 | 1 | 805.00091 | 3,07 |
| PZ 1 | 110 | 1 | 805.00101 | 5,02 |
| PZ 2 | 110 | 1 | 805.00111 | 5,02 |
| PZ 3 | 110 | 1 | 805.00121 | 5,02 |
| PZ 1 | 127 | 1 | 805.00131 | 5,45 |
| PZ 2 | 127 | 1 | 805.00141 | 5,45 |
| PZ 3 | 127 | 1 | 805.00151 | 5,45 |
| PZ 1 | 152 | 1 | 805.00161 | 7,16 |
| PZ 2 | 152 | 1 | 805.00171 | 7,16 |
| PZ 3 | 152 | 1 | 805.00181 | 7,16 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| PZ 1 | 50 | 10 | 805.0001 | 13,26 |
| PZ 2 | 50 | 10 | 805.0002 | 13,26 |
| PZ 3 | 50 | 10 | 805.0003 | 13,26 |
| PZ 1 | 70 | 10 | 805.0004 | 20,61 |
| PZ 2 | 70 | 10 | 805.0005 | 20,61 |
| PZ 3 | 70 | 10 | 805.0006 | 20,61 |
| PZ 1 | 89 | 10 | 805.0007 | 25,98 |
| PZ 2 | 89 | 10 | 805.0008 | 25,98 |
| PZ 3 | 89 | 10 | 805.0009 | 25,98 |
| PZ 1 | 110 | 10 | 805.0010 | 44,94 |
| PZ 2 | 110 | 10 | 805.0011 | 44,94 |
| PZ 3 | 110 | 10 | 805.0012 | 44,94 |
| PZ 1 | 127 | 10 | 805.0013 | 48,67 |
| PZ 2 | 127 | 10 | 805.0014 | 48,67 |
| PZ 3 | 127 | 10 | 805.0015 | 48,67 |
| PZ 1 | 152 | 10 | 805.0016 | 65,55 |
| PZ 2 | 152 | 10 | 805.0017 | 65,55 |
| PZ 3 | 152 | 10 | 805.0018 | 65,55 |


Execution: Screwdriving bit with C6.3 bit connection, profile T (Torx).

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| T 5 | 25 | 2 | 806.00052 | 2,91 |
| T 6 | 25 | 2 | 806.00062 | 2,91 |
| T 7 | 25 | 2 | 806.00072 | 2,91 |
| T 8 | 25 | 2 | 806.00082 | 2,91 |
| T 9 | 25 | 2 | 806.00092 | 2,91 |
| T 10 | 25 | 2 | 806.00102 | 2,67 |
| T 15 | 25 | 2 | 806.00152 | 2,67 |
| T 20 | 25 | 2 | 806.00202 | 2,67 |
| T 25 | 25 | 2 | 806.00252 | 2,67 |
| T 27 | 25 | 2 | 806.00272 | 2,67 |
| T 30 | 25 | 2 | 806.00302 | 2,67 |
| T 40 | 25 | 2 | 806.00402 | 2,67 |
| T 45 | 25 | 2 | 806.00452 | 8,37 |
| T 50 | 25 | 2 | 806.00502 | 8,94 |
| T 55 | 25 | 2 | 806.00552 | 9,40 |
| | | | | |
| T 5 | 25 | 10 | 806.0005 | 12,50 |
| T 6 | 25 | 10 | 806.0006 | 12,50 |
| T 7 | 25 | 10 | 806.0007 | 12,50 |


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| T 8 | 25 | 10 | 806.0008 | 12,50 |
| T 9 | 25 | 10 | 806.0009 | 12,50 |
| T 10 | 25 | 10 | 806.0010 | 11,29 |
| T 15 | 25 | 10 | 806.0015 | 11,29 |
| T 20 | 25 | 10 | 806.0020 | 11,29 |
| T 25 | 25 | 10 | 806.0025 | 11,29 |
| T 27 | 25 | 10 | 806.0027 | 11,29 |
| T 30 | 25 | 10 | 806.0030 | 11,29 |
| T 40 | 25 | 10 | 806.0040 | 11,29 |
| T 45 | 25 | 10 | 806.0045 | 39,79 |
| T 50 | 25 | 10 | 806.0050 | 42,64 |
| T 55 | 25 | 10 | 806.0055 | 44,94 |
| | | | | |
| T 10 | 25 | 50 | 806.00105 | 51,48 |
| T 15 | 25 | 50 | 806.00155 | 51,48 |
| T 20 | 25 | 50 | 806.00205 | 51,48 |
| T 25 | 25 | 50 | 806.00255 | 51,48 |
| T 30 | 25 | 50 | 806.00305 | 51,48 |


Execution: Screwdriving bit 'Inox+' with C6.3 bit connection, profile T (Torx), high-alloy stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| T 10 | 25 | 2 | 806.11102 | 6,50 |
| T 15 | 25 | 2 | 806.11152 | 6,50 |
| T 20 | 25 | 2 | 806.11202 | 6,50 |
| T 25 | 25 | 2 | 806.11252 | 6,50 |
| T 30 | 25 | 2 | 806.11302 | 6,50 |
| T 40 | 25 | 2 | 806.11402 | 6,50 |


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| T 10 | 25 | 10 | 806.1110 | 29,50 |
| T 15 | 25 | 10 | 806.1115 | 29,50 |
| T 20 | 25 | 10 | 806.1120 | 29,50 |
| T 25 | 25 | 10 | 806.1125 | 29,50 |
| T 30 | 25 | 10 | 806.1130 | 29,50 |
| T 40 | 25 | 10 | 806.1140 | 29,50 |


Execution: Screwdriving bit with C6.3 bit connection, profile T (Torx), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| T 5 | 25 | 2 | 806.20052 | 5,30 |
| T 6 | 25 | 2 | 806.20062 | 5,30 |
| T 8 | 25 | 2 | 806.20082 | 5,30 |
| T 9 | 25 | 2 | 806.20092 | 5,30 |
| T 10 | 25 | 2 | 806.20102 | 5,09 |
| T 15 | 25 | 2 | 806.20152 | 5,09 |
| T 20 | 25 | 2 | 806.20202 | 5,09 |
| T 25 | 25 | 2 | 806.20252 | 5,09 |
| T 30 | 25 | 2 | 806.20302 | 5,09 |
| T 40 | 25 | 2 | 806.20402 | 5,09 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| T 5 | 25 | 10 | 806.2005 | 24,44 |
| T 6 | 25 | 10 | 806.2006 | 24,44 |
| T 8 | 25 | 10 | 806.2008 | 24,44 |
| T 9 | 25 | 10 | 806.2009 | 24,44 |
| T 10 | 25 | 10 | 806.2010 | 23,35 |
| T 15 | 25 | 10 | 806.2015 | 23,35 |
| T 20 | 25 | 10 | 806.2020 | 23,35 |
| T 25 | 25 | 10 | 806.2025 | 23,35 |
| T 30 | 25 | 10 | 806.2030 | 23,35 |
| T 40 | 25 | 10 | 806.2040 | 23,35 |



Execution: Screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile T (Torx).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| T 10 | 25 | 2 | 806.30102 | 8,00 |
| T 15 | 25 | 2 | 806.30152 | 8,00 |
| T 20 | 25 | 2 | 806.30202 | 8,00 |
| T 25 | 25 | 2 | 806.30252 | 8,00 |
| T 30 | 25 | 2 | 806.30302 | 8,00 |
| T 40 | 25 | 2 | 806.30402 | 8,00 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| T 10 | 25 | 10 | 806.3010 | 37,93 |
| T 15 | 25 | 10 | 806.3015 | 37,93 |
| T 20 | 25 | 10 | 806.3020 | 37,93 |
| T 25 | 25 | 10 | 806.3025 | 37,93 |
| T 30 | 25 | 10 | 806.3030 | 37,93 |
| T 40 | 25 | 10 | 806.3040 | 37,93 |

Screwdriving bit T-T, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile T-T (Torx Tamper).

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| T 10 T | 25 | 2 | 806.70102 | 4,21 |
| T 15 T | 25 | 2 | 806.70152 | 4,21 |
| T 20 T | 25 | 2 | 806.70202 | 4,21 |
| T 25 T | 25 | 2 | 806.70252 | 4,21 |
| T 27 T | 25 | 2 | 806.70272 | 4,21 |
| T 30 T | 25 | 2 | 806.70302 | 4,21 |
| T 40 T | 25 | 2 | 806.70402 | 4,21 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| T 10 T | 25 | 10 | 806.7010 | 19,94 |
| T 15 T | 25 | 10 | 806.7015 | 19,94 |
| T 20 T | 25 | 10 | 806.7020 | 19,94 |
| T 25 T | 25 | 10 | 806.7025 | 19,94 |
| T 27 T | 25 | 10 | 806.7027 | 19,94 |
| T 30 T | 25 | 10 | 806.7030 | 19,94 |
| T 40 T | 25 | 10 | 806.7040 | 19,94 |


Screwdriving bit T-S, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile T-S (Torx with pin).

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| T 10 S | 25 | 2 | 806.80102 | 4,63 |
| T 15 S | 25 | 2 | 806.80152 | 4,63 |
| T 20 S | 25 | 2 | 806.80202 | 4,63 |
| T 25 S | 25 | 2 | 806.80252 | 4,63 |
| T 27 S | 25 | 2 | 806.80272 | 4,63 |
| T 30 S | 25 | 2 | 806.80302 | 4,63 |
| T 40 S | 25 | 2 | 806.80402 | 4,63 |



| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| T 10 S | 25 | 10 | 806.8010 | 21,93 |
| T 15 S | 25 | 10 | 806.8015 | 21,93 |
| T 20 S | 25 | 10 | 806.8020 | 21,63 |
| T 25 S | 25 | 10 | 806.8025 | 21,93 |
| T 27 S | 25 | 10 | 806.8027 | 21,93 |
| T 30 S | 25 | 10 | 806.8030 | 21,93 |
| T 40 S | 25 | 10 | 806.8040 | 21,93 |



Execution: Torsion screwdriving bit with C6.3 bit connection, profile T (Torx). 3° Tapered for anti-cam-out effect.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| T 10 | 25 | 2 | 807.00102 | 4,95 |
| T 15 | 25 | 2 | 807.00152 | 4,95 |
| T 20 | 25 | 2 | 807.00202 | 4,95 |
| T 25 | 25 | 2 | 807.00252 | 4,95 |
| T 30 | 25 | 2 | 807.00302 | 4,95 |
| T 40 | 25 | 2 | 807.00402 | 4,95 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| T 10 | 25 | 10 | 807.0010 | 22,69 |
| T 15 | 25 | 10 | 807.0015 | 22,69 |
| T 20 | 25 | 10 | 807.0020 | 22,69 |
| T 25 | 25 | 10 | 807.0025 | 22,69 |
| T 30 | 25 | 10 | 807.0030 | 22,69 |
| T 40 | 25 | 10 | 807.0040 | 22,69 |




Execution: Torsion screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile T (Torx), stainless steel. 3° Tapered for anti-cam-out effect.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| T 10 * | 25 | 2 | 807.10102 | 8,15 |
| T 15 * | 25 | 2 | 807.10152 | 8,15 |
| T 25 * | 25 | 2 | 807.10252 | 8,15 |
| T 30 * | 25 | 2 | 807.10302 | 8,15 |
| T 40 * | 25 | 2 | 807.10402 | 8,15 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| T 10 * | 25 | 10 | 807.1010 | 38,70 |
| T 15 * | 25 | 10 | 807.1015 | 38,70 |
| T 25 * | 25 | 10 | 807.1025 | 38,70 |
| T 30 * | 25 | 10 | 807.1030 | 38,70 |
| T 40 * | 25 | 10 | 807.1040 | 38,70 |

* Phase-out item, available until stock has depleted



Execution: Torsion screwdriving bit with C6.3 bit connection, profile T (Torx), with TiN-coating. 3° Tapered for anti-cam-out effect.

Application: Ideal for automated production lines and in combination with power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| T 10 | 25 | 2 | 807.20102 | 7,10 |
| T 15 | 25 | 2 | 807.20152 | 7,10 |
| T 20 | 25 | 2 | 807.20202 | 7,10 |
| T 25 | 25 | 2 | 807.20252 | 7,10 |
| T 30 | 25 | 2 | 807.20302 | 7,10 |
| T 40 | 25 | 2 | 807.20402 | 7,10 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| T 10 | 25 | 10 | 807.2010 | 33,44 |
| T 15 | 25 | 10 | 807.2015 | 33,44 |
| T 20 | 25 | 10 | 807.2020 | 33,44 |
| T 25 | 25 | 10 | 807.2025 | 33,44 |
| T 30 | 25 | 10 | 807.2030 | 33,44 |
| T 40 | 25 | 10 | 807.2040 | 33,44 |

Execution: Screwdriving bit with E6.3 bit connection, profile T (Torx).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| T 10 | 50 | 2 | 808.00102 | 6,49 |
| T 15 | 50 | 2 | 808.00152 | 6,49 |
| T 20 | 50 | 2 | 808.00202 | 6,49 |
| T 25 | 50 | 2 | 808.00252 | 6,49 |
| T 27 | 50 | 2 | 808.00272 | 6,49 |
| T 30 | 50 | 2 | 808.00302 | 6,49 |
| T 40 | 50 | 2 | 808.00402 | 6,49 |
| T 10 | 70 | 1 | 808.10101 | 5,11 |
| T 15 | 70 | 1 | 808.10151 | 5,11 |
| T 20 | 70 | 1 | 808.10201 | 5,11 |
| T 25 | 70 | 1 | 808.10251 | 5,11 |
| T 27 | 70 | 1 | 808.10271 | 5,11 |
| T 30 | 70 | 1 | 808.10301 | 5,11 |
| T 40 | 70 | 1 | 808.10401 | 5,11 |
| T 10 | 89 | 1 | 808.20101 | 5,14 |
| T 15 | 89 | 1 | 808.20151 | 5,14 |
| T 20 | 89 | 1 | 808.20201 | 5,14 |
| T 25 | 89 | 1 | 808.20251 | 5,14 |
| T 27 | 89 | 1 | 808.20271 | 5,14 |
| T 30 | 89 | 1 | 808.20301 | 5,14 |
| T 40 | 89 | 1 | 808.20401 | 5,14 |
| T 10 | 110 | 1 | 808.30101 | 5,26 |
| T 15 | 110 | 1 | 808.30151 | 5,26 |
| T 20 | 110 | 1 | 808.30201 | 5,26 |
| T 25 | 110 | 1 | 808.30251 | 5,26 |
| T 27 | 110 | 1 | 808.30271 | 5,26 |
| T 30 | 110 | 1 | 808.30301 | 5,26 |
| T 40 | 110 | 1 | 808.30401 | 5,26 |
| T 10 | 127 | 1 | 808.40101 | 7,29 |
| T 15 | 127 | 1 | 808.40151 | 7,29 |
| T 20 | 127 | 1 | 808.40201 | 7,29 |
| T 25 | 127 | 1 | 808.40251 | 7,29 |
| T 27 | 127 | 1 | 808.40271 | 7,29 |
| T 30 | 127 | 1 | 808.40301 | 7,29 |
| T 40 | 127 | 1 | 808.40401 | 7,29 |
| T 10 | 152 | 1 | 808.50101 | 8,51 |
| T 15 | 152 | 1 | 808.50151 | 8,51 |
| T 20 | 152 | 1 | 808.50201 | 8,51 |
| T 25 | 152 | 1 | 808.50251 | 8,51 |
| T 27 | 152 | 1 | 808.50271 | 8,51 |
| T 30 | 152 | 1 | 808.50301 | 8,51 |
| T 40 | 152 | 1 | 808.50401 | 8,51 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| T 10 | 50 | 10 | 808.0010 | 30,37 |
| T 15 | 50 | 10 | 808.0015 | 30,37 |
| T 20 | 50 | 10 | 808.0020 | 30,37 |
| T 25 | 50 | 10 | 808.0025 | 30,37 |
| T 27 | 50 | 10 | 808.0027 | 30,37 |
| T 30 | 50 | 10 | 808.0030 | 30,37 |
| T 40 | 50 | 10 | 808.0040 | 30,37 |
| T 10 | 70 | 10 | 808.1010 | 46,48 |
| T 15 | 70 | 10 | 808.1015 | 46,48 |
| T 20 | 70 | 10 | 808.1020 | 46,48 |
| T 25 | 70 | 10 | 808.1025 | 46,48 |
| T 27 | 70 | 10 | 808.1027 | 46,48 |
| T 30 | 70 | 10 | 808.1030 | 46,48 |
| T 40 | 70 | 10 | 808.1040 | 46,48 |
| T 10 | 89 | 10 | 808.2010 | 46,70 |
| T 15 | 89 | 10 | 808.2015 | 46,70 |
| T 20 | 89 | 10 | 808.2020 | 46,70 |
| T 25 | 89 | 10 | 808.2025 | 46,70 |
| T 27 | 89 | 10 | 808.2027 | 46,70 |
| T 30 | 89 | 10 | 808.2030 | 46,70 |
| T 40 | 89 | 10 | 808.2040 | 46,70 |
| T 10 | 110 | 10 | 808.3010 | 47,35 |
| T 15 | 110 | 10 | 808.3015 | 47,35 |
| T 20 | 110 | 10 | 808.3020 | 47,35 |
| T 25 | 110 | 10 | 808.3025 | 47,35 |
| T 27 | 110 | 10 | 808.3027 | 47,35 |
| T 30 | 110 | 10 | 808.3030 | 47,35 |
| T 40 | 110 | 10 | 808.3040 | 47,35 |
| T 10 | 127 | 10 | 808.4010 | 67,08 |
| T 15 | 127 | 10 | 808.4015 | 67,08 |
| T 20 | 127 | 10 | 808.4020 | 67,08 |
| T 25 | 127 | 10 | 808.4025 | 67,08 |
| T 27 | 127 | 10 | 808.4027 | 67,08 |
| T 30 | 127 | 10 | 808.4030 | 67,08 |
| T 40 | 127 | 10 | 808.4040 | 67,08 |
| T 10 | 152 | 10 | 808.5010 | 79,03 |
| T 15 | 152 | 10 | 808.5015 | 79,03 |
| T 20 | 152 | 10 | 808.5020 | 79,03 |
| T 25 | 152 | 10 | 808.5025 | 79,03 |
| T 27 | 152 | 10 | 808.5027 | 79,03 |
| T 30 | 152 | 10 | 808.5030 | 79,03 |
| T 40 | 152 | 10 | 808.5040 | 79,03 |

Screwdriving bit T-T, E6.3



Execution: Screwdriving bit with E6.3 bit connection, profile T-T (Torx Tamper).


Application: Ideal for computers, home appliances, power tools, etc.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| T 10 T | 50 | 2 | 808.70102 | 7,94 |
| T 15 T | 50 | 2 | 808.70152 | 7,94 |
| T 20 T | 50 | 2 | 808.70202 | 7,94 |
| T 25 T | 50 | 2 | 808.70252 | 7,94 |
| T 30 T | 50 | 2 | 808.70302 | 7,94 |
| T 40 T | 50 | 2 | 808.70402 | 7,94 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| T 10 T | 50 | 10 | 808.7010 | 37,60 |
| T 15 T | 50 | 10 | 808.7015 | 37,60 |
| T 20 T | 50 | 10 | 808.7020 | 37,60 |
| T 25 T | 50 | 10 | 808.7025 | 37,60 |
| T 27 T | 50 | 10 | 808.7027 | 37,81 |
| T 30 T | 50 | 10 | 808.7030 | 37,60 |
| T 40 T | 50 | 10 | 808.7040 | 37,60 |

809

Screwdriving bit SQD, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile SQD (Robertson).

Application: Production of recreational vehicles (RV's), air ducts and furniture.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|-------------|
| SQD 0 | 25 | 2 | 809.00002 | 2,12 |
| SQD 1 | 25 | 2 | 809.00012 | 2,12 |
| SQD 2 | 25 | 2 | 809.00022 | 2,12 |
| SQD 3 | 25 | 2 | 809.00032 | 2,12 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|----------|-------------|
| SQD 0 | 25 | 10 | 809.0000 | 8,55 |
| SQD 1 | 25 | 10 | 809.0001 | 8,55 |
| SQD 2 | 25 | 10 | 809.0002 | 8,55 |
| SQD 3 | 25 | 10 | 809.0003 | 8,55 |

810

Screwdriving bit SQD, E6.3




Execution: Screwdriving bit with E6.3 bit connection, profile SQD (Robertson).

Application: Production of recreational vehicles (RV's), air ducts and furniture.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|-------------|
| SQD 0 | 50 | 2 | 810.00002 | 3,99 |
| SQD 1 | 50 | 2 | 810.00012 | 3,99 |
| SQD 2 | 50 | 2 | 810.00022 | 3,99 |
| SQD 3 | 50 | 2 | 810.00032 | 3,99 |
| SQD 0 | 70 | 1 | 810.10001 | 2,96 |
| SQD 1 | 70 | 1 | 810.10011 | 2,96 |
| SQD 2 | 70 | 1 | 810.10021 | 2,96 |
| SQD 3 | 70 | 1 | 810.10031 | 2,96 |
| SQD 0 | 89 | 1 | 810.20001 | 3,85 |
| SQD 1 | 89 | 1 | 810.20011 | 3,85 |
| SQD 2 | 89 | 1 | 810.20021 | 3,85 |
| SQD 3 | 89 | 1 | 810.20031 | 3,85 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|----------|--------------|
| SQD 0 | 50 | 10 | 810.0000 | 17,87 |
| SQD 1 | 50 | 10 | 810.0001 | 17,87 |
| SQD 2 | 50 | 10 | 810.0002 | 17,87 |
| SQD 3 | 50 | 10 | 810.0003 | 17,87 |
| SQD 0 | 70 | 10 | 810.1000 | 24,99 |
| SQD 1 | 70 | 10 | 810.1001 | 24,99 |
| SQD 2 | 70 | 10 | 810.1002 | 24,99 |
| SQD 3 | 70 | 10 | 810.1003 | 24,99 |
| SQD 0 | 89 | 10 | 810.2000 | 33,76 |
| SQD 1 | 89 | 10 | 810.2001 | 33,76 |
| SQD 2 | 89 | 10 | 810.2002 | 33,76 |
| SQD 3 | 89 | 10 | 810.2003 | 33,76 |

Execution: Screwdriving bit with C6.3 bit connection, profile HEX (Allen).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| SW 2 | 25 | 2 | 811.00202 | 2,96 |
| SW 2,5 | 25 | 2 | 811.00252 | 2,96 |
| SW 3 | 25 | 2 | 811.00302 | 2,96 |
| SW 4 | 25 | 2 | 811.00402 | 2,96 |
| SW 5 | 25 | 2 | 811.00502 | 2,96 |
| SW 6 | 25 | 2 | 811.00602 | 2,96 |
| SW 7 | 25 | 2 | 811.00702 | 3,84 |
| SW 8 | 25 | 2 | 811.00802 | 4,27 |
| SW 10 | 25 | 2 | 811.01002 | 5,88 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| SW 2 | 25 | 10 | 811.0020 | 12,72 |
| SW 2,5 | 25 | 10 | 811.0025 | 12,72 |
| SW 3 | 25 | 10 | 811.0030 | 12,72 |
| SW 4 | 25 | 10 | 811.0040 | 12,72 |
| SW 5 | 25 | 10 | 811.0050 | 12,72 |
| SW 6 | 25 | 10 | 811.0060 | 12,72 |
| SW 7 | 25 | 10 | 811.0070 | 17,10 |
| SW 8 | 25 | 10 | 811.0080 | 19,29 |
| SW 10 | 25 | 10 | 811.0100 | 27,29 |

Screwdriving bit HEX, C6.3, ball head
Execution: Screwdriving bit with C6.3 bit connection, profile HEX (Allen), with ball head.

Application: For hard to reach screws and bolts with hex-socket drive. Max. axial angle is 25°.


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| SW 2 | 25 | 2 | 811.10202 | 5,20 |
| SW 2,5 | 25 | 2 | 811.10252 | 5,20 |
| SW 3 | 25 | 2 | 811.10302 | 5,20 |
| SW 4 | 25 | 2 | 811.10402 | 5,20 |
| SW 5 | 25 | 2 | 811.10502 | 5,20 |
| SW 6 | 25 | 2 | 811.10602 | 5,20 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| SW 2 | 25 | 10 | 811.1020 | 23,90 |
| SW 2,5 | 25 | 10 | 811.1025 | 23,90 |
| SW 3 | 25 | 10 | 811.1030 | 23,90 |
| SW 4 | 25 | 10 | 811.1040 | 23,90 |
| SW 5 | 25 | 10 | 811.1050 | 23,90 |
| SW 6 | 25 | 10 | 811.1060 | 23,90 |

Screwdriving bit HEX, E6.3
Execution: Screwdriving bit with E6.3 bit connection, profile HEX (Allen).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|-----------|-------------|
| SW 2 | 50 | 2 | 811.20202 | 6,84 |
| SW 2,5 | 50 | 2 | 811.20252 | 6,84 |
| SW 3 | 50 | 2 | 811.20302 | 6,84 |
| SW 4 | 50 | 2 | 811.20402 | 6,84 |
| SW 5 | 50 | 2 | 811.20502 | 6,84 |
| SW 6 | 50 | 2 | 811.20602 | 6,84 |
| SW 8 | 50 | 2 | 811.20802 | 8,33 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|--------------|
| SW 2 | 50 | 10 | 811.2020 | 32,12 |
| SW 2,5 | 50 | 10 | 811.2025 | 32,12 |
| SW 3 | 50 | 10 | 811.2030 | 32,12 |
| SW 4 | 50 | 10 | 811.2040 | 32,12 |
| SW 5 | 50 | 10 | 811.2050 | 32,12 |
| SW 6 | 50 | 10 | 811.2060 | 32,12 |
| SW 8 | 50 | 10 | 811.2080 | 39,57 |

812
Screwdriving bit SL, C6.3
ROTEC®

Execution: Screwdriving bit with C6.3 bit connection, profile SL (Slot).

| Type | l ₁ | pcs/PU | Item no. | €/PU |
|--------------|----------------|--------|-----------|-------------|
| SL 0,5 x 3,0 | 25 | 2 | 812.00302 | 2,24 |
| SL 0,6 x 3,5 | 25 | 2 | 812.00352 | 2,24 |
| SL 0,8 x 4,0 | 25 | 2 | 812.00402 | 2,24 |
| SL 1,0 x 5,5 | 25 | 2 | 812.00552 | 2,24 |
| SL 1,2 x 6,5 | 25 | 2 | 812.00652 | 2,24 |
| SL 1,6 x 8,0 | 25 | 2 | 812.00802 | 3,16 |

| Type | l ₁ | pcs/PU | Item no. | €/PU |
|--------------|----------------|--------|----------|--------------|
| SL 0,5 x 3,0 | 25 | 10 | 812.0030 | 9,10 |
| SL 0,6 x 3,5 | 25 | 10 | 812.0035 | 9,10 |
| SL 0,8 x 4,0 | 25 | 10 | 812.0040 | 9,10 |
| SL 1,0 x 5,5 | 25 | 10 | 812.0055 | 9,10 |
| SL 1,2 x 6,5 | 25 | 10 | 812.0065 | 9,10 |
| SL 1,6 x 8,0 | 25 | 10 | 812.0080 | 13,71 |

Screwdriving bit SL, E6.3
ROTEC®

Execution: Screwdriving bit with E6.3 bit connection, profile SL (Slot).

| Type | l ₁ | pcs/PU | Item no. | €/PU |
|--------------|----------------|--------|-----------|-------------|
| SL 0,6 x 3,5 | 50 | 2 | 812.10352 | 4,69 |
| SL 0,8 x 4,0 | 50 | 2 | 812.10402 | 4,69 |
| SL 1,0 x 5,5 | 50 | 2 | 812.10552 | 4,69 |
| SL 1,2 x 6,5 | 50 | 2 | 812.10652 | 4,69 |
| SL 1,6 x 8,0 | 50 | 2 | 812.10802 | 6,75 |

| Type | l ₁ | pcs/PU | Item no. | €/PU |
|--------------|----------------|--------|----------|--------------|
| SL 0,6 x 3,5 | 50 | 10 | 812.1035 | 21,37 |
| SL 0,8 x 4,0 | 50 | 10 | 812.1040 | 21,37 |
| SL 1,0 x 5,5 | 50 | 10 | 812.1055 | 21,37 |
| SL 1,2 x 6,5 | 50 | 10 | 812.1065 | 21,37 |
| SL 1,6 x 8,0 | 50 | 10 | 812.1080 | 31,68 |

813
Screwdriving bit XZN, C6.3
ROTEC®

Execution: Screwdriving bit with C6.3 bit connection, profile XZN (Triple-square).

Application: Automotive industry.

| Type | l ₁ | pcs/PU | Item no. | €/PU |
|---------|----------------|--------|-----------|-------------|
| XZN M4 | 25 | 2 | 813.00042 | 3,42 |
| XZN M5 | 25 | 2 | 813.00052 | 3,42 |
| XZN M6 | 25 | 2 | 813.00062 | 3,42 |
| XZN M8 | 25 | 2 | 813.00082 | 6,16 |
| XZN M10 | 25 | 2 | 813.00102 | 6,16 |

| Type | l ₁ | pcs/PU | Item no. | €/PU |
|---------|----------------|--------|----------|--------------|
| XZN M4 | 25 | 10 | 813.0004 | 15,02 |
| XZN M5 | 25 | 10 | 813.0005 | 15,02 |
| XZN M6 | 25 | 10 | 813.0006 | 15,02 |
| XZN M8 | 25 | 10 | 813.0008 | 28,71 |
| XZN M10 | 25 | 10 | 813.0010 | 28,71 |

814
Screwdriving bit SP, C6.3

Execution: Screwdriving bit with C6.3 bit connection, profile SP (Spanner).

Application: Safety screws, home appliances and power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|-------------|
| SP 4 | 25 | 2 | 814.00042 | 6,12 |
| SP 6 | 25 | 2 | 814.00062 | 6,12 |
| SP 8 | 25 | 2 | 814.00082 | 6,12 |
| SP 10 | 25 | 2 | 814.00102 | 6,12 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|----------|--------------|
| SP 4 | 25 | 10 | 814.0004 | 28,50 |
| SP 6 | 25 | 10 | 814.0006 | 28,50 |
| SP 8 | 25 | 10 | 814.0008 | 28,50 |
| SP 10 | 25 | 10 | 814.0010 | 28,50 |

815
Screwdriving bit TW, C6.3

Execution: Screwdriving bit with C6.3 bit connection, profile TW (Tri-Wing).

Application: Safety screws, home appliances and power tools.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|-------------|
| TW 1 | 25 | 2 | 815.00012 | 6,55 |
| TW 2 | 25 | 2 | 815.00022 | 6,55 |
| TW 3 | 25 | 2 | 815.00032 | 6,55 |
| TW 4 | 25 | 2 | 815.00042 | 6,55 |
| TW 5 | 25 | 2 | 815.00052 | 6,55 |
| TW 6 | 25 | 2 | 815.00062 | 6,55 |
| TW 7 | 25 | 2 | 815.00072 | 6,55 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------------|
| TW 1 | 25 | 10 | 815.0001 | 30,69 |
| TW 2 | 25 | 10 | 815.0002 | 30,69 |
| TW 3 | 25 | 10 | 815.0003 | 30,69 |
| TW 4 | 25 | 10 | 815.0004 | 30,69 |
| TW 5 | 25 | 10 | 815.0005 | 30,69 |
| TW 6 | 25 | 10 | 815.0006 | 30,69 |
| TW 7 | 25 | 10 | 815.0007 | 30,69 |

815
Screwdriving bit TS, C6.3

Execution: Screwdriving bit with C6.3 bit connection, profile TS (Torq-set).

Application: Space and aviation industry.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|-----------|-------------|
| TS 1 | 25 | 2 | 815.10012 | 6,55 |
| TS 2 | 25 | 2 | 815.10022 | 6,55 |
| TS 3 | 25 | 2 | 815.10032 | 6,55 |
| TS 4 | 25 | 2 | 815.10042 | 6,55 |
| TS 5 | 25 | 2 | 815.10052 | 6,55 |
| TS 6 | 25 | 2 | 815.10062 | 6,55 |
| TS 8 | 25 | 2 | 815.10082 | 6,55 |
| TS 10 | 25 | 2 | 815.10102 | 6,55 |

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|----------|--------------|
| TS 1 | 25 | 10 | 815.1001 | 30,69 |
| TS 2 | 25 | 10 | 815.1002 | 30,69 |
| TS 3 | 25 | 10 | 815.1003 | 30,69 |
| TS 4 | 25 | 10 | 815.1004 | 30,69 |
| TS 5 | 25 | 10 | 815.1005 | 30,69 |
| TS 6 | 25 | 10 | 815.1006 | 30,69 |
| TS 8 | 25 | 10 | 815.1008 | 30,69 |
| TS 10 | 25 | 10 | 815.1010 | 30,69 |



825.0010



825.0020



825.0030



825.0040



| Description | Content | pcs/PU | Item no. | € / PU |
|--|--|--------|----------|--------------|
| 11 pc Bit-clip 'PRO' * | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25 and 30 1x magnetic bitholder | 1 | 825.0010 | 20,45 |
| 11 pc Bit-clip 'TIN' * | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25 and 30 1x magnetic bitholder | 1 | 825.0020 | 30,78 |
| 11 pc Bit-clip 'AntiCor' (stainless steel) * | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25 and 30 1x non-magnetic bitholder | 1 | 825.0030 | 36,25 |
| 11 pc Bit-clip 'Diamond' * | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25 and 30 1x magnetic bitholder | 1 | 825.0040 | 47,80 |

* Phase-out item, available until stock has depleted

Bit-clip XXL, 1/4"


825.0200



| Description | Content | pcs/PU | Item no. | € / PU |
|----------------------------|--|--------|----------|--------------|
| 31 pc Bit-clip XXL 'PRO' * | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25 and 30 1x magnetic bitholder | 1 | 825.0200 | 47,43 |

* Phase-out item, available until stock has depleted




825.0105

825.0110



818.0001

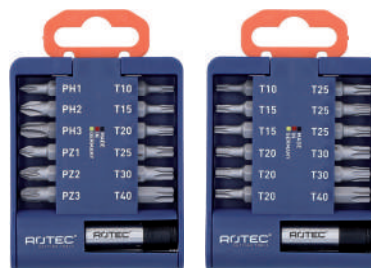

825.0106

825.0111



818.0080



| Description | Content | pcs/PU | Item no. | € / PU |
|-------------------------------|---|--------|----------|--------------|
| 13-pc. Bit set 'PRO' | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25, 30 and 40 1x magnetic bitholder (818.0001) | 1 | 825.0105 | 16,50 |
| 13-pc. Bit set 'PRO' + 'SLIM' | PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25, 30 and 40 1x magnetic quick-change bitholder 'SLIM' (818.0080) | 1 | 825.0106 | 19,95 |
| 13-pc. Bit set 'PRO' | T (Torx®) : 1x10, 2x15, 3x20, 3x25, 2x30 and 1x40 1x magnetic bitholder (818.0001) | 1 | 825.0110 | 21,50 |
| 13-pc. Bit set 'PRO' + 'SLIM' | T (Torx®) : 1x10, 2x15, 3x20, 3x25, 2x30 and 1x40 1x magnetic quick-change bitholder 'SLIM' (818.0080) | 1 | 825.0111 | 24,95 |

BLACK IMPACT BITS

High precision profiles reach extremely high fitting accuracy in the screw head

Sustainable reduction of bit tip stress

Absorption of impact power through the optimised torsion zone

High stability workmanship, made of molybdenum vanadium steel

ROTEC P22 Made in Germany

DIAMOND IMPACT BITS

Small diamonds grab themselves in the screw, thereby counteracting the so-called „Cam-Out-Effect“

High precision profiles reach extremely high fitting accuracy in the screw head

Sustainable reduction of bit tip stress

Absorption of impact power through the optimised torsion zone

High stability workmanship, made of molybdenum vanadium steel

ROTEC 817.0302 IMPACT DIAMOND PH2 Made in Germany

ATHLET IMPACT BITS WITH TORSION ZONE

Modern impact drills are getting increasingly strong, leading to higher torques and more powerful impact forces being transmitted. At the same time, the requirements for the bits are increasing. ATHLET, however, provides a reliable solution: The impact bits.

These bits are designed with an optimised torsion zone. This zone absorbs the high impact force of power tools and, as a result, sustainably reduces the bit tip stress. Thus the bit stays eminently long-lasting.

The ATHLET impact bits are made of high-alloy molybdenum vanadium steel, afterwards tempered tough and hard. The combination of high stability workmanship and a sophisticated

torsion zone ensures a professional tightening process – for the long run.

Our impact bits have high precision profiles and reach an extremely high fitting accuracy in the screw head.

They are available in lengths of 30 and 50 mm. The 50 mm version can be applied directly, without additional bit holder, into impact screwdrivers.

ATHLET completes the impact bits series with an additional magnetic impact bit holder for our impact bits in 30 mm length. The additional torsion zone of the Impact magnetic bit holder supports the 30 mm impact bits in the aspect of absorbing high impact forces.


IMPACT BLACK


Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 30 | 2 | 817.00012 | 3,84 |
| PH 2 | 30 | 2 | 817.00022 | 3,84 |
| PH 3 | 30 | 2 | 817.00032 | 3,84 |
| PH 1 | 30 | 10 | 817.0001 | 17,10 |
| PH 2 | 30 | 10 | 817.0002 | 17,10 |
| PH 3 | 30 | 10 | 817.0003 | 17,10 |


IMPACT Screwdriving bit PH, E6.3

IMPACT BLACK


Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 50 | 2 | 817.01012 | 7,12 |
| PH 2 | 50 | 2 | 817.01022 | 7,12 |
| PH 3 | 50 | 2 | 817.01032 | 7,12 |
| PH 1 | 50 | 5 | 817.0101 | 16,78 |
| PH 2 | 50 | 5 | 817.0102 | 16,78 |
| PH 3 | 50 | 5 | 817.0103 | 16,78 |

IMPACT Screwdriving bit PH, C6.3, 'DIAMOND'

IMPACT DIAMOND


Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 30 | 2 | 817.02012 | 8,37 |
| PH 2 | 30 | 2 | 817.02022 | 8,37 |
| PH 3 | 30 | 2 | 817.02032 | 8,37 |
| PH 1 | 30 | 10 | 817.0201 | 39,79 |
| PH 2 | 30 | 10 | 817.0202 | 39,79 |
| PH 3 | 30 | 10 | 817.0203 | 39,79 |

IMPACT Screwdriving bit PH, E6.3, 'DIAMOND'

IMPACT DIAMOND


Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|-----------|--------------|
| PH 1 | 50 | 2 | 817.03012 | 11,69 |
| PH 2 | 50 | 2 | 817.03022 | 11,69 |
| PH 3 | 50 | 2 | 817.03032 | 11,69 |
| PH 1 | 50 | 5 | 817.0301 | 28,17 |
| PH 2 | 50 | 5 | 817.0302 | 28,17 |
| PH 3 | 50 | 5 | 817.0303 | 28,17 |

IMPACT Screwdriving bit PZ, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| PZ 1 | 30 | 2 | 817.10012 | 3,84 |
| PZ 2 | 30 | 2 | 817.10022 | 3,84 |
| PZ 3 | 30 | 2 | 817.10032 | 3,84 |
| PZ 1 | 30 | 10 | 817.1001 | 17,10 |
| PZ 2 | 30 | 10 | 817.1002 | 17,10 |
| PZ 3 | 30 | 10 | 817.1003 | 17,10 |

IMPACT Screwdriving bit PZ, E6.3




Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| PZ 1 | 50 | 2 | 817.11012 | 7,12 |
| PZ 2 | 50 | 2 | 817.11022 | 7,12 |
| PZ 3 | 50 | 2 | 817.11032 | 7,12 |
| PZ 1 | 50 | 5 | 817.1101 | 16,78 |
| PZ 2 | 50 | 5 | 817.1102 | 16,78 |
| PZ 3 | 50 | 5 | 817.1103 | 16,78 |

IMPACT Screwdriving bit PZ, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| PZ 1 | 30 | 2 | 817.12012 | 8,37 |
| PZ 2 | 30 | 2 | 817.12022 | 8,37 |
| PZ 3 | 30 | 2 | 817.12032 | 8,37 |
| PZ 1 | 30 | 10 | 817.1201 | 39,79 |
| PZ 2 | 30 | 10 | 817.1202 | 39,79 |
| PZ 3 | 30 | 10 | 817.1203 | 39,79 |

IMPACT Screwdriving bit PZ, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| PZ 1 | 50 | 2 | 817.13012 | 11,69 |
| PZ 2 | 50 | 2 | 817.13022 | 11,69 |
| PZ 3 | 50 | 2 | 817.13032 | 11,69 |
| PZ 1 | 50 | 5 | 817.1301 | 28,17 |
| PZ 2 | 50 | 5 | 817.1302 | 28,17 |
| PZ 3 | 50 | 5 | 817.1303 | 28,17 |

IMPACT Screwdriving bit T, C6.3



**IMPACT
BLACK**



| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|-------------|
| T 10 | 30 | 2 | 817.20102 | 4,98 |
| T 15 | 30 | 2 | 817.20152 | 4,98 |
| T 20 | 30 | 2 | 817.20202 | 4,98 |
| T 25 | 30 | 2 | 817.20252 | 4,98 |
| T 30 | 30 | 2 | 817.20302 | 4,98 |
| T 40 | 30 | 2 | 817.20402 | 4,98 |

Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|----------|--------------|
| T 10 | 30 | 10 | 817.2010 | 22,80 |
| T 15 | 30 | 10 | 817.2015 | 22,80 |
| T 20 | 30 | 10 | 817.2020 | 22,80 |
| T 25 | 30 | 10 | 817.2025 | 22,80 |
| T 30 | 30 | 10 | 817.2030 | 22,80 |
| T 40 | 30 | 10 | 817.2040 | 22,80 |

IMPACT Screwdriving bit T, E6.3



**IMPACT
BLACK**




| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|-------------|
| T 10 | 50 | 2 | 817.21102 | 8,37 |
| T 15 | 50 | 2 | 817.21152 | 8,37 |
| T 20 | 50 | 2 | 817.21202 | 8,37 |
| T 25 | 50 | 2 | 817.21252 | 8,37 |
| T 30 | 50 | 2 | 817.21302 | 8,37 |
| T 40 | 50 | 2 | 817.21402 | 8,37 |

Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|----------|--------------|
| T 10 | 50 | 5 | 817.2110 | 19,90 |
| T 15 | 50 | 5 | 817.2115 | 19,90 |
| T 20 | 50 | 5 | 817.2120 | 19,90 |
| T 25 | 50 | 5 | 817.2125 | 19,90 |
| T 30 | 50 | 5 | 817.2130 | 19,90 |
| T 40 | 50 | 5 | 817.2140 | 19,90 |

IMPACT Screwdriving bit T, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|-------------|
| T 10 | 30 | 2 | 817.22102 | 9,52 |
| T 15 | 30 | 2 | 817.22152 | 9,52 |
| T 20 | 30 | 2 | 817.22202 | 9,52 |
| T 25 | 30 | 2 | 817.22252 | 9,52 |
| T 30 | 30 | 2 | 817.22302 | 9,52 |
| T 40 | 30 | 2 | 817.22402 | 9,52 |

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| T 10 | 30 | 10 | 817.22110 | 45,49 |
| T 15 | 30 | 10 | 817.22115 | 45,49 |
| T 20 | 30 | 10 | 817.22210 | 45,49 |
| T 25 | 30 | 10 | 817.22215 | 45,49 |
| T 30 | 30 | 10 | 817.22310 | 45,49 |
| T 40 | 30 | 10 | 817.22410 | 45,49 |

IMPACT Screwdriving bit T, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| T 10 | 50 | 2 | 817.23102 | 12,94 |
| T 15 | 50 | 2 | 817.23152 | 12,94 |
| T 20 | 50 | 2 | 817.23202 | 12,94 |
| T 25 | 50 | 2 | 817.23252 | 12,94 |
| T 30 | 50 | 2 | 817.23302 | 12,94 |
| T 40 | 50 | 2 | 817.23402 | 12,94 |

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| T 10 | 50 | 5 | 817.23110 | 31,29 |
| T 15 | 50 | 5 | 817.23115 | 31,29 |
| T 20 | 50 | 5 | 817.23210 | 31,29 |
| T 25 | 50 | 5 | 817.23215 | 31,29 |
| T 30 | 50 | 5 | 817.23310 | 31,29 |
| T 40 | 50 | 5 | 817.23410 | 31,29 |

IMPACT Screwdriving bit SQD, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|-------|-------|--------|-----------|--------------|
| SQD 1 | 30 | 2 | 817.30012 | 4,98 |
| SQD 2 | 30 | 2 | 817.30022 | 4,98 |
| SQD 3 | 30 | 2 | 817.30032 | 4,98 |
| SQD 1 | 30 | 10 | 817.3001 | 22,80 |
| SQD 2 | 30 | 10 | 817.3002 | 22,80 |
| SQD 3 | 30 | 10 | 817.3003 | 22,80 |

IMPACT Screwdriving bit SQD, E6.3




Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|-------|-------|--------|-----------|--------------|
| SQD 1 | 50 | 2 | 817.31012 | 8,37 |
| SQD 2 | 50 | 2 | 817.31022 | 8,37 |
| SQD 3 | 50 | 2 | 817.31032 | 8,37 |
| SQD 1 | 50 | 5 | 817.3101 | 19,90 |
| SQD 2 | 50 | 5 | 817.3102 | 19,90 |
| SQD 3 | 50 | 5 | 817.3103 | 19,90 |

IMPACT Screwdriving bit SQD, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|-------|-------|--------|-----------|--------------|
| SQD 1 | 30 | 2 | 817.32012 | 9,52 |
| SQD 2 | 30 | 2 | 817.32022 | 9,52 |
| SQD 3 | 30 | 2 | 817.32032 | 9,52 |
| SQD 1 | 30 | 10 | 817.3201 | 45,49 |
| SQD 2 | 30 | 10 | 817.3202 | 45,49 |
| SQD 3 | 30 | 10 | 817.3203 | 45,49 |

IMPACT Screwdriving bit SQD, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|-------|-------|--------|-----------|--------------|
| SQD 1 | 50 | 2 | 817.33012 | 12,94 |
| SQD 2 | 50 | 2 | 817.33022 | 12,94 |
| SQD 3 | 50 | 2 | 817.33032 | 12,94 |
| SQD 1 | 50 | 5 | 817.3301 | 31,29 |
| SQD 2 | 50 | 5 | 817.3302 | 31,29 |
| SQD 3 | 50 | 5 | 817.3303 | 31,29 |

IMPACT Screwdriving bit HEX, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile HEX (Allen).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| SW 3 | 30 | 2 | 817.40032 | 4,98 |
| SW 4 | 30 | 2 | 817.40042 | 4,98 |
| SW 5 | 30 | 2 | 817.40052 | 4,98 |
| SW 6 | 30 | 2 | 817.40062 | 4,98 |
| SW 3 | 30 | 10 | 817.4003 | 22,80 |
| SW 4 | 30 | 10 | 817.4004 | 22,80 |
| SW 5 | 30 | 10 | 817.4005 | 22,80 |
| SW 6 | 30 | 10 | 817.4006 | 22,80 |

IMPACT Screwdriving bit HEX, E6.3



Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile HEX (Allen).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|-----------|--------------|
| SW 3 | 50 | 2 | 817.41032 | 8,37 |
| SW 4 | 50 | 2 | 817.41042 | 8,37 |
| SW 5 | 50 | 2 | 817.41052 | 8,37 |
| SW 6 | 50 | 2 | 817.41062 | 8,37 |
| SW 3 | 50 | 5 | 817.4103 | 19,90 |
| SW 4 | 50 | 5 | 817.4104 | 19,90 |
| SW 5 | 50 | 5 | 817.4105 | 19,90 |
| SW 6 | 50 | 5 | 817.4106 | 19,90 |

Bit holder | without C-ring



Execution: Magnetic bit holders without C-ring. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | € / PU |
|----------|----------------|----------|--------|-----------|--------------|
| Magnetic | 60 | ø10 x 35 | 1 | 818.00011 | 4,32 |
| Magnetic | 60 | ø10 x 35 | 10 | 818.0001 | 38,26 |

Bit holder | with C-ring



Execution: Magnetic bit holders with C-ring. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | € / PU |
|----------|----------------|----------|--------|-----------|---------------|
| Magnetic | 60 | ø11 x 35 | 1 | 818.00101 | 5,42 |
| Magnetic | 74 | ø11 x 35 | 1 | 818.00151 | 8,71 |
| Magnetic | 100 | ø10 x 35 | 1 | 818.00251 | 16,86 |
| Magnetic | 150 | ø10 x 35 | 1 | 818.00301 | 19,12 |
| Magnetic | 200 | ø10 x 35 | 1 | 818.00351 | 20,45 |
| Magnetic | 250 | ø10 x 35 | 1 | 818.00401 | 20,73 |
| Magnetic | 60 | ø11 x 35 | 10 | 818.0010 | 49,22 |
| Magnetic | 74 | ø11 x 35 | 10 | 818.0015 | 82,11 |
| Magnetic | 100 | ø10 x 35 | 10 | 818.0025 | 163,58 |
| Magnetic | 150 | ø10 x 35 | 10 | 818.0030 | 185,40 |
| Magnetic | 200 | ø10 x 35 | 10 | 818.0035 | 196,36 |
| Magnetic | 250 | ø10 x 35 | 10 | 818.0040 | 207,32 |

Stainless steel bit holder | with C-ring



Execution: Non-magnetic bit holders with C-ring for stainless steel bits. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | € / PU |
|--------------|----------------|--------|--------|-----------|--------------|
| Non-magnetic | 60 | ø11x32 | 1 | 818.00171 | 5,42 |
| Non-magnetic | 60 | ø11x32 | 10 | 818.0017 | 49,22 |



Execution: Magnetic stainless steel bit holders with C-ring. Machined from one piece. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | € / PU |
|----------|----------------|---------|--------|-----------|--------------|
| Magnetic | 74 | ø9,6x45 | 1 | 818.00201 | 9,19 |
| Magnetic | 74 | ø9,6x45 | 10 | 818.0020 | 86,96 |

Bit holder, for drywall screws



Execution: Magnetic bit holder for drywall screws. Hexagon shank according to DIN 3126-E6.3 (ISO 1173). Including 1x PRO-bit PH 2 BASIC.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|----------|----------------|--------|----------|--------------|
| Magnetic | 65 | 1 | 818.0045 | 10,89 |

Bitholder, SDS-plus


Execution: Magnetic bit holder with C-ring. SDS+ (ø10mm) shank.



| Type | l_1 | Body | pcs/PU | Item no. | € / PU |
|----------|-------|----------|--------|-----------|---------------|
| Magnetic | 85 | ø11 x 35 | 1 | 818.00501 | 16,92 |
| Magnetic | 85 | ø11 x 35 | 10 | 818.0050 | 163,58 |

Bit holder, quick-lock

Execution: Magnetic quick-change bit holder. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).




| Type | l_1 | pcs/PU | Item no. | € / PU |
|----------|-------|--------|----------|--------------|
| QuickFix | 60 | 1 | 818.0060 | 10,89 |

Execution: 'SLIM'-type magnetic quick-change bit holder. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).




| Type | l_1 | d_3 | pcs/PU | Item no. | € / PU |
|--------|-------|-------|--------|----------|--------------|
| 'SLIM' | 61 | 12 | 1 | 818.0080 | 13,95 |

Execution: Magnetic bit holder with ball-joint (up to 20°). Hexagon shank according to DIN 3126-E6.3 (ISO 1173).



| Type | l_1 | pcs/PU | Item no. | € / PU |
|-------|-------|--------|----------|--------------|
| ANGLE | 65 | 1 | 818.0065 | 19,64 |

Execution: Magnetic quick-change bit holder. With ring magnet. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).



| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|----------|--------------|
| TWIN | 65 | 1 | 818.0070 | 10,89 |

Execution: Magnetic quick-change bit holder. With magnet and ball-joint (up to 20°). Hexagon shank according to DIN 3126-E6.3 (ISO 1173).



| Type | l_1 | pcs/PU | Item no. | € / PU |
|-----------|-------|--------|----------|--------------|
| TripleFix | 90 | 1 | 818.0067 | 23,28 |



Execution: Magnetic quick-change bit holder, extra long. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|----------|--------------|
| TWIN | 250 | 1 | 818.0085 | 23,28 |



Execution: Magnetic quick-change bit holder, extra long and flexible shaft. Hexagon shank according to DIN 3126-E6.3 (ISO 1173). Maximum torque allowed: 8 Nm.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|------|-------|--------|----------|--------------|
| Flex | 225 | 1 | 818.0090 | 26,52 |



Execution: Bit holder, square to 1/4"-C6.3 with circlip.


| A_1 | A_2 | pcs/PU | Item no. | € / PU |
|-----------------|-----------------|--------|----------|--------------|
| 1/4" square (F) | 1/4" - C6.3 (F) | 1 | 818.5000 | 11,92 |
| 1/2" square (F) | 1/4" - C6.3 (F) | 1 | 818.5020 | 16,31 |



Execution: Quick-change bit holder, square to 1/4"-C6.3.


| A_1 | A_2 | pcs/PU | Item no. | € / PU |
|-----------------|-----------------|--------|----------|--------------|
| 1/4" square (F) | 1/4" - C6.3 (F) | 1 | 818.5100 | 18,17 |
| 3/8" square (F) | 1/4" - C6.3 (F) | 1 | 818.5110 | 22,06 |
| 1/2" square (F) | 1/4" - C6.3 (F) | 1 | 818.5120 | 27,25 |

2C-Bit screwdriver



Execution: Bit screwdriver with ergonomic 2C-grip, stainless steel sleeve and a strong permanent magnet.

| Execution | l_1 | pcs/PU | Item no. | € / PU |
|----------------------|-------|--------|----------|--------------|
| Magnetic, w/o C-ring | 230 | 1 | 818.8010 | 14,61 |



Execution: Bit screwdriver with ergonomic 2C-grip, Quick-Lock-system with stainless steel sleeve and a strong permanent magnet.

| Execution | l_1 | pcs/PU | Item no. | € / PU |
|---------------------------|-------|--------|----------|--------------|
| Magnetic, with Quick-Lock | 130 | 1 | 818.8020 | 13,46 |
| Magnetic, with Quick-Lock | 230 | 1 | 818.8030 | 17,18 |



Execution: Bit-screwdriver with plastic coated flexible shank, ergonomic 2C-grip, stainless steel sleeve, circlip and a strong permanent magnet.

| Execution | l_1 | pcs/PU | Item no. | € / PU |
|-----------------------|-------|--------|----------|--------------|
| Magnetic, with C-ring | 310 | 1 | 818.8040 | 23,28 |



Bit ratchet



Execution: Handy bi-directional magnetic bit ratchet for 1/4" screwdriving bit.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|----------|-------|--------|----------|--------------|
| Magnetic | 95 | 1 | 818.9001 | 29,24 |



1C Bit-screwdriver, T-handle




Execution: Bit screwdriver with ergonomic 1C T-handle, stainless steel sleeve and a strong permanent magnet.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|----------|-------|--------|----------|--------------|
| Magnetic | 125 | 1 | 818.9500 | 10,15 |




IMPACT C-Ring bit holder

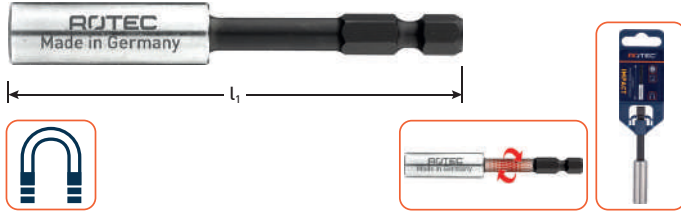

Execution: Magnetic impact bit holder with C-ring. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | €/PU |
|----------|----------------|----------|--------|----------|-------|
| Magnetic | 80 | ø11 x 35 | 1 | 818.1010 | 14,17 |


IMPACT Bit holder | QuickFix II

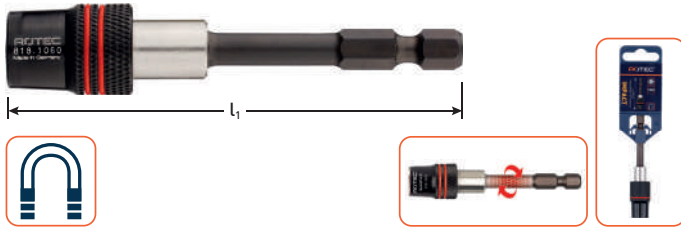

Execution: Magnetic impact bit holder with quick change system. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | €/PU |
|--------------|----------------|----------|--------|----------|-------|
| Quick-Fix II | 80 | ø11 x 35 | 1 | 818.1060 | 21,83 |

IMPACT Bit holder | Twin

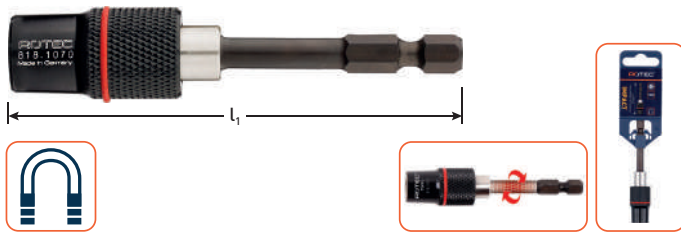

Execution: Magnetic impact bit holder with quick change system. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

| Type | l ₁ | Body | pcs/PU | Item no. | €/PU |
|-------------|----------------|----------|--------|----------|-------|
| Impact TWIN | 85 | ø11 x 35 | 1 | 818.1070 | 27,30 |

Execution: PRO Screwdriving bit with 5/16" bit connection, profile PH (Phillips).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|-------------|
| PH 1 | 32 | 1 | 816.0001 | 2,93 |
| PH 2 | 32 | 1 | 816.0002 | 2,93 |
| PH 3 | 32 | 1 | 816.0003 | 2,93 |
| PH 4 | 38 | 1 | 816.0004 | 6,07 |

PRO Screwdriving bit PZ, 5/16"
Execution: PRO Screwdriving bit with 5/16" bit connection, profile PZ (Poqidriv).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|-------------|
| PZ 1 | 32 | 1 | 816.1001 | 2,93 |
| PZ 2 | 32 | 1 | 816.1002 | 2,93 |
| PZ 3 | 32 | 1 | 816.1003 | 2,93 |
| PZ 4 | 38 | 1 | 816.1004 | 6,07 |

PRO Screwdriving bit T, 5/16"
Execution: PRO Screwdriving bit with 5/16" bit connection, profile T (Torx).


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|-------------|
| T 15 * | 32 | 1 | 816.2015 | 4,32 |
| T 20 * | 32 | 1 | 816.2020 | 4,32 |
| T 25 | 32 | 1 | 816.2025 | 4,32 |
| T 27 | 32 | 1 | 816.2027 | 4,32 |
| T 30 | 32 | 1 | 816.2030 | 4,32 |
| T 50 | 32 | 1 | 816.2050 | 4,32 |
| T 55 | 38 | 1 | 816.2055 | 7,06 |
| T 60 | 38 | 1 | 816.2060 | 8,93 |

* Phase-out item, available until stock has depleted

PRO Screwdriving bit HEX, 5/16"
Execution: PRO Screwdriving bit with 5/16" bit connection, profile HEX (Allen).



| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|----------|-------------|
| SW 3 | 32 | 1 | 816.3003 | 4,21 |
| SW 4 | 32 | 1 | 816.3004 | 4,21 |
| SW 5 | 32 | 1 | 816.3005 | 4,21 |
| SW 6 | 32 | 1 | 816.3006 | 4,21 |
| SW 7 | 38 | 1 | 816.3007 | 4,21 |
| SW 8 | 38 | 1 | 816.3008 | 4,21 |
| SW 9 | 38 | 1 | 816.3009 | 6,71 |
| SW 10 | 38 | 1 | 816.3010 | 6,54 |



Execution: Nut setter, E6.3, magnetic

| Type | l ₁ | A ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|----------------|--------|-----------|--------|
| SW 5 | 50 | 1/4" - E6.3 | 1 | 819.00501 | 4,99 |
| SW 5,5 | 50 | 1/4" - E6.3 | 1 | 819.00551 | 4,99 |
| SW 6 | 50 | 1/4" - E6.3 | 1 | 819.00601 | 4,99 |
| SW 7 | 50 | 1/4" - E6.3 | 1 | 819.00701 | 5,15 |
| SW 8 | 50 | 1/4" - E6.3 | 1 | 819.00801 | 5,15 |
| SW 9 | 50 | 1/4" - E6.3 | 1 | 819.00901 | 5,34 |
| SW 10 | 50 | 1/4" - E6.3 | 1 | 819.01001 | 5,34 |
| SW 11 | 50 | 1/4" - E6.3 | 1 | 819.01101 | 5,65 |
| SW 12 | 50 | 1/4" - E6.3 | 1 | 819.01201 | 5,89 |
| SW 13 | 50 | 1/4" - E6.3 | 1 | 819.01301 | 5,89 |
| SW 14 | 65 | 1/4" - E6.3 | 1 | 819.01401 | 12,67 |
| SW 17 | 65 | 1/4" - E6.3 | 1 | 819.01701 | 12,67 |
| SW 19 | 65 | 1/4" - E6.3 | 1 | 819.01901 | 12,67 |
| SW 5 | 50 | 1/4" - E6.3 | 3 | 819.0050 | 13,51 |
| SW 5,5 | 50 | 1/4" - E6.3 | 3 | 819.0055 | 13,51 |
| SW 6 | 50 | 1/4" - E6.3 | 3 | 819.0060 | 13,51 |
| SW 7 | 50 | 1/4" - E6.3 | 3 | 819.0070 | 13,95 |
| SW 8 | 50 | 1/4" - E6.3 | 3 | 819.0080 | 13,95 |
| SW 9 | 50 | 1/4" - E6.3 | 3 | 819.0090 | 14,57 |
| SW 10 | 50 | 1/4" - E6.3 | 3 | 819.0100 | 14,57 |
| SW 11 | 50 | 1/4" - E6.3 | 3 | 819.0110 | 14,57 |
| SW 12 | 50 | 1/4" - E6.3 | 3 | 819.0120 | 15,31 |
| SW 13 | 50 | 1/4" - E6.3 | 3 | 819.0130 | 15,31 |
| SW 14 | 65 | 1/4" - E6.3 | 3 | 819.0140 | 35,65 |
| SW 17 | 65 | 1/4" - E6.3 | 3 | 819.0170 | 35,65 |
| SW 19 | 65 | 1/4" - E6.3 | 3 | 819.0190 | 35,65 |

Nut setter, magnetic (imperial)

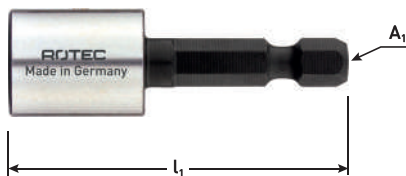

Execution: Nut setter, E6.3, magnetic

| Type | l ₁ | A ₁ | pcs/PU | Item no. | € / PU |
|----------|----------------|----------------|--------|-----------|--------|
| SW 1/4" | 50 | 1/4" - E6.3 | 1 | 819.10101 | 4,99 |
| SW 5/16" | 50 | 1/4" - E6.3 | 1 | 819.10201 | 5,15 |
| SW 3/8" | 50 | 1/4" - E6.3 | 1 | 819.10301 | 5,34 |
| SW 1/4" | 50 | 1/4" - E6.3 | 3 | 819.1010 | 13,51 |
| SW 5/16" | 50 | 1/4" - E6.3 | 3 | 819.1020 | 13,95 |
| SW 3/8" | 50 | 1/4" - E6.3 | 3 | 819.1030 | 14,57 |

900

Nut setter set, magnetic

ROTEC



Execution: Set of magnetic socket wrenches equipped with E6.3 HEX connection for use in cordless drill.

Application: Suitable for loosening and tightening bolts and nuts.

Remark: Socket wrench 5/16" is not physically in the set, but bolts and nuts of this size can be fixed with socket spanner size SW 8.



| Description | Type | Content | pcs/PU | Item no. | € / PU |
|---|------|---|--------|----------|--------------|
| 7 pc set nut setters with E6.3 1/4"-bit shank, in ABS-cas-sette | 819 | 1x HEX 7 1x HEX 8 (HEX 5/16") 1x HEX 10 1x HEX 12 1x HEX 13 1x HEX 1/4" 1x HEX 3/8" | 1 | 819.9000 | 44,29 |

Stud driver

ROTEC


Application: Handy accessory for placing of stud screws.



| d ₁ | l ₁ | A ₁ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|--------|----------|--------------|
| M6 | 50 | 1/4" - E6.3 | 1 | 819.6006 | 11,69 |
| M8 | 50 | 1/4" - E6.3 | 1 | 819.6008 | 12,26 |
| M10 | 50 | 1/4" - E6.3 | 1 | 819.6010 | 13,30 |


Execution: Nut setter, E6.3, unmagnetic

| Type | l ₁ | A ₁ | pcs/PU | Item no. | €/ PU |
|--------|----------------|----------------|--------|-----------|--------------|
| SW 5 | 50 | 1/4" - E6.3 | 1 | 819.20501 | 5,40 |
| SW 5,5 | 50 | 1/4" - E6.3 | 1 | 819.20551 | 5,40 |
| SW 6 | 50 | 1/4" - E6.3 | 1 | 819.20601 | 5,40 |
| SW 7 | 50 | 1/4" - E6.3 | 1 | 819.20701 | 5,54 |
| SW 8 | 50 | 1/4" - E6.3 | 1 | 819.20801 | 5,54 |
| SW 9 | 50 | 1/4" - E6.3 | 1 | 819.20901 | 5,54 |
| SW 10 | 50 | 1/4" - E6.3 | 1 | 819.21001 | 5,85 |
| SW 11 | 50 | 1/4" - E6.3 | 1 | 819.21101 | 6,14 |
| SW 12 | 50 | 1/4" - E6.3 | 1 | 819.21201 | 6,39 |
| SW 13 | 50 | 1/4" - E6.3 | 1 | 819.21301 | 6,39 |
| | | | | | |
| SW 5 | 50 | 1/4" - E6.3 | 3 | 819.2050 | 14,71 |
| SW 5,5 | 50 | 1/4" - E6.3 | 3 | 819.2055 | 14,71 |
| SW 6 | 50 | 1/4" - E6.3 | 3 | 819.2060 | 14,71 |
| SW 7 | 50 | 1/4" - E6.3 | 3 | 819.2070 | 15,15 |
| SW 8 | 50 | 1/4" - E6.3 | 3 | 819.2080 | 15,15 |
| SW 9 | 50 | 1/4" - E6.3 | 3 | 819.2090 | 15,15 |
| SW 10 | 50 | 1/4" - E6.3 | 3 | 819.2100 | 16,07 |
| SW 11 | 50 | 1/4" - E6.3 | 3 | 819.2110 | 16,07 |
| SW 12 | 50 | 1/4" - E6.3 | 3 | 819.2120 | 16,84 |
| SW 13 | 50 | 1/4" - E6.3 | 3 | 819.2130 | 16,84 |

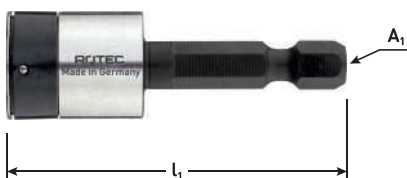Nut setter, unmagnetic (imperial)

Execution: Nut setter, E6.3, unmagnetic

| Type | l ₁ | A ₁ | pcs/PU | Item no. | €/ PU |
|----------|----------------|----------------|--------|-----------|--------------|
| SW 1/4" | 50 | 1/4" - E6.3 | 1 | 819.30101 | 5,69 |
| SW 5/16" | 50 | 1/4" - E6.3 | 1 | 819.30201 | 5,85 |
| SW 3/8" | 50 | 1/4" - E6.3 | 1 | 819.30301 | 6,14 |
| | | | | | |
| SW 1/4" | 50 | 1/4" - E6.3 | 3 | 819.3010 | 14,71 |
| SW 5/16" | 50 | 1/4" - E6.3 | 3 | 819.3020 | 15,15 |
| SW 3/8" | 50 | 1/4" - E6.3 | 3 | 819.3030 | 16,07 |

Nu setter, magnetic, SDS-plus

Execution: Nut setter, SDS-plus, magnetic

| Type | l ₁ | A ₁ | pcs/PU | Item no. | €/ PU |
|-------|----------------|----------------|--------|-----------|--------------|
| SW 8 | 65 | SDS-plus | 1 | 819.50801 | 12,97 |
| SW 9 | 65 | SDS-plus | 1 | 819.50901 | 12,97 |
| SW 10 | 65 | SDS-plus | 1 | 819.51001 | 12,97 |
| SW 11 | 65 | SDS-plus | 1 | 819.51101 | 13,27 |
| SW 12 | 65 | SDS-plus | 1 | 819.51201 | 13,27 |
| SW 13 | 65 | SDS-plus | 1 | 819.51301 | 13,76 |
| SW 14 | 65 | SDS-plus | 1 | 819.51401 | 14,29 |
| SW 17 | 65 | SDS-plus | 1 | 819.51701 | 15,24 |


Nut setter, magnetic, SDS-plus (imperial)

Execution: Nut setter, SDS-plus, magnetic

| Type | l ₁ | A ₁ | pcs/PU | Item no. | €/ PU |
|----------|----------------|----------------|--------|-----------|--------------|
| SW 5/16" | 65 | SDS-plus | 1 | 819.50101 | 13,76 |
| SW 3/8" | 65 | SDS-plus | 1 | 819.50301 | 14,29 |


Application: Only for manual use!

| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|--------------------|----------------|--------|-----------|--------------|
| 1/4"-C6.3 | 1/4" square (ball) | 25 | 1 | 820.00101 | 4,85 |
| 1/4"-C6.3 | 1/4" square (ball) | 25 | 10 | 820.0010 | 43,53 |


Application: Only for manual use!

| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|--------------------|----------------|--------|-----------|--------------|
| 1/4"-E6.3 | 1/4" square (ball) | 50 | 1 | 820.00201 | 5,30 |
| 1/4"-E6.3 | 1/4" square (ball) | 50 | 10 | 820.0020 | 48,06 |

Adapters with pin



| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| 1/4"-E6.3 | 1/4" square (pin) | 50 | 1 | 820.00301 | 5,50 |
| 1/4"-E6.3 | 1/4" square (pin) | 50 | 10 | 820.0030 | 50,07 |



| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| 1/4"-E6.3 | 1/4" square (pin) | 100 | 1 | 820.00401 | 6,86 |
| 1/4"-E6.3 | 1/4" square (pin) | 100 | 10 | 820.0040 | 63,56 |



| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| 1/4"-E6.3 | 3/8" square (pin) | 50 | 1 | 820.00501 | 8,63 |
| 1/4"-E6.3 | 3/8" square (pin) | 50 | 10 | 820.0050 | 81,16 |

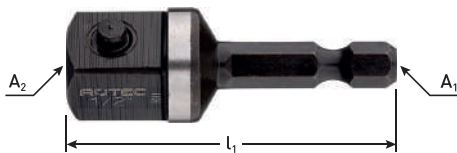

| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| 1/4"-E6.3 | 1/2" square (pin) | 50 | 1 | 820.00601 | 9,22 |
| 1/4"-E6.3 | 1/2" square (pin) | 50 | 10 | 820.0060 | 85,37 |

Adapter SDS-plus > Square w. pin



| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| SDS-plus* | 1/4" square (pin) | 60 | 1 | 820.00701 | 12,84 |

* Phase-out item, available until stock has depleted




| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| SDS-plus* | 3/8" square (pin) | 60 | 1 | 820.00801 | 14,30 |

* Phase-out item, available until stock has depleted



| A ₁ | A ₂ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|-------------------|----------------|--------|-----------|--------------|
| SDS-plus* | 1/2" square (pin) | 65 | 1 | 820.00901 | 15,19 |

* Phase-out item, available until stock has depleted

827
OPTI-LINE Screwdriving bit PH, C6.3

Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|------|----------------|--------|----------|-------------|
| PH 1 | 25 | 2 | 827.0100 | 1,25 |
| PH 2 | 25 | 2 | 827.0200 | 1,25 |
| PH 3 | 25 | 2 | 827.0300 | 1,25 |
| PH 1 | 25 | 25 | 827.0105 | 8,70 |
| PH 2 | 25 | 25 | 827.0205 | 8,70 |
| PH 3 | 25 | 25 | 827.0305 | 8,70 |

OPTI-LINE Screwdriving bit PH, C6.3, for drywall screws


Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with metal collar and excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|------|----------------|--------|----------|--------------|
| PH 2 | 25 | 1 | 827.1000 | 2,13 |
| PH 2 | 25 | 5 | 827.1002 | 9,30 |
| PH 2 | 25 | 10 | 827.1005 | 16,36 |

OPTI-LINE Screwdriving bit PZ, C6.3

Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with excellent price-quality ratio.


| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|------|----------------|--------|----------|-------------|
| PZ 1 | 25 | 2 | 827.1100 | 1,25 |
| PZ 2 | 25 | 2 | 827.1200 | 1,25 |
| PZ 3 | 25 | 2 | 827.1300 | 1,25 |
| PZ 1 | 25 | 25 | 827.1105 | 8,70 |
| PZ 2 | 25 | 25 | 827.1205 | 8,70 |
| PZ 3 | 25 | 25 | 827.1305 | 8,70 |

OPTI-LINE Screwdriving bit SL, C6.3

Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile SL (Slot), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | €/ PU |
|----------------|----------------|--------|----------|-------------|
| SL 0,6 x 4,5 | 25 | 2 | 827.2450 | 1,25 |
| SL 0,8 x 5,5 * | 25 | 2 | 827.2550 | 1,25 |
| SL 1,2 x 6,5 | 25 | 2 | 827.2650 | 1,25 |
| SL 0,5 x 4,0 | 25 | 25 | 827.2405 | 8,70 |
| SL 0,6 x 4,5 | 25 | 25 | 827.2455 | 8,70 |
| SL 1,0 x 6,0 | 25 | 25 | 827.2605 | 8,70 |
| SL 1,2 x 6,5 | 25 | 25 | 827.2655 | 8,70 |

* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit T, C6.3



Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile T (Torx), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|--------|
| T 10 | 25 | 2 | 827.3100 | 1,50 |
| T 15 | 25 | 2 | 827.3150 | 1,50 |
| T 20 | 25 | 2 | 827.3200 | 1,50 |
| T 25 | 25 | 2 | 827.3250 | 1,50 |
| T 30 | 25 | 2 | 827.3300 | 1,50 |
| T 40 | 25 | 2 | 827.3400 | 1,50 |
| | | | | |
| T 10 | 25 | 25 | 827.3105 | 9,75 |
| T 15 | 25 | 25 | 827.3155 | 9,75 |
| T 20 | 25 | 25 | 827.3205 | 9,75 |
| T 25 | 25 | 25 | 827.3255 | 9,75 |
| T 27 | 25 | 25 | 827.3275 | 9,75 |
| T 30 | 25 | 25 | 827.3305 | 9,75 |
| T 40 | 25 | 25 | 827.3405 | 9,75 |

OPTI-LINE Screwdriving bit HEX, C6.3




Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile HEX (Inbus), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|---------|----------------|--------|----------|--------|
| HEX 3 | 25 | 2 | 827.4300 | 1,50 |
| HEX 4 | 25 | 2 | 827.4400 | 1,50 |
| HEX 5 * | 25 | 2 | 827.4500 | 1,50 |
| | | | | |
| HEX 3 | 25 | 25 | 827.4305 | 9,02 |
| HEX 4 | 25 | 25 | 827.4405 | 9,02 |
| HEX 6 * | 25 | 25 | 827.4605 | 9,41 |
| HEX 8 * | 25 | 25 | 827.4805 | 9,80 |


* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit SQD, C6.3




Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile SQD (Robertson), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|-------|----------------|--------|----------|--------|
| SQD 2 | 25 | 25 | 827.6205 | 8,70 |

828
OPTI-LINE Screwdriving bit PH, E6.3
ROTEC®

Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile PH (Phillips), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|-------------|
| PH 1 | 50 | 2 | 828.0100 | 3,43 |
| PH 2 | 50 | 2 | 828.0200 | 3,43 |
| PH 3 | 50 | 2 | 828.0300 | 3,43 |
| PH 1 | 50 | 10 | 828.0105 | 8,39 |
| PH 2 | 50 | 10 | 828.0205 | 8,39 |
| PH 3 | 50 | 10 | 828.0305 | 8,39 |

OPTI-LINE Screwdriving bit PZ, E6.3
ROTEC®

Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile PZ (Pozidriv), with excellent price-quality ratio.


| Type | l ₁ | pcs/PU | Item no. | € / PU |
|------|----------------|--------|----------|-------------|
| PZ 1 | 50 | 2 | 828.1100 | 3,43 |
| PZ 2 | 50 | 2 | 828.1200 | 3,43 |
| PZ 3 | 50 | 2 | 828.1300 | 3,43 |
| PZ 1 | 50 | 10 | 828.1105 | 8,39 |
| PZ 2 | 50 | 10 | 828.1205 | 8,39 |
| PZ 3 | 50 | 10 | 828.1305 | 8,39 |

OPTI-LINE Screwdriving bit SL, E6.3
ROTEC®

Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile SL (Slot), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|-------------|
| SL 1,2 x 6,5 * | 50 | 2 | 828.2650 | 3,91 |
| SL 0,5 x 4,0 * | 50 | 10 | 828.2405 | 7,50 |
| SL 0,6 x 4,5 * | 50 | 10 | 828.2455 | 7,50 |
| SL 0,8 x 5,5 * | 50 | 10 | 828.2555 | 7,50 |
| SL 1,0 x 6,0 * | 50 | 10 | 828.2605 | 7,50 |
| SL 1,2 x 6,5 * | 50 | 10 | 828.2655 | 7,50 |
| SL 1,6 x 8,0 * | 50 | 5 | 828.2805 | 7,50 |


* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit T, E6.3
ROTEC®

Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile T (Torx), with excellent price-quality ratio.

| Type | l ₁ | pcs/PU | Item no. | € / PU |
|--------|----------------|--------|----------|-------------|
| T 10 | 50 | 2 | 828.3100 | 3,43 |
| T 15 | 50 | 2 | 828.3150 | 3,43 |
| T 20 | 50 | 2 | 828.3200 | 3,43 |
| T 25 | 50 | 2 | 828.3250 | 3,43 |
| T 30 | 50 | 2 | 828.3300 | 3,43 |
| T 40 | 50 | 2 | 828.3400 | 3,43 |
| T 10 | 50 | 10 | 828.3105 | 7,95 |
| T 15 | 50 | 10 | 828.3155 | 7,95 |
| T 20 | 50 | 10 | 828.3205 | 7,95 |
| T 25 | 50 | 10 | 828.3255 | 7,95 |
| T 27 | 50 | 10 | 828.3275 | 7,95 |
| T 30 | 50 | 10 | 828.3305 | 7,95 |
| T 40 | 50 | 10 | 828.3405 | 7,95 |
| T 50 * | 50 | 10 | 828.3505 | 7,95 |

* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit SQD, E6.3



OPTI

Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile SQD (Robertson), with excellent price-quality ratio.

| Type | l_1 | pcs/PU | Item no. | € / PU |
|-------|-------|--------|----------|--------|
| SQD 2 | 50 | 10 | 828.6205 | 8,39 |

827

OPTI-LINE Bit holders



OPTI

Execution: OPTI-LINE Magnetic bit holder, suitable for all 1/4" size screw driving bits.


| Type | l_1 | pcs/PU | Item no. | € / PU |
|----------|-------|--------|----------|--------|
| Magnetic | 60 | 1 | 827.9500 | 4,02 |




OPTI

Execution: OPTI-LINE Magnetic quick-change bit holder, suitable for all 1/4" size screw driving bits.


| Type | l_1 | pcs/PU | Item no. | € / PU |
|------------|-------|--------|----------|--------|
| Quick-Lock | 60 | 1 | 827.9510 | 6,51 |




827.9050



827.9051



827.9052



827.9053



| Description | Content | | pcs/PU | Item no. | € / PU |
|--------------------------|--|----|--------|----------|--------------|
| 13 pc. OPTI-LINE bit set | PH (Phillips) : 1 - 2 - 3 PZ (Pozi) : 1 - 2 - 3 T (Torx®) : 10 - 15 - 20 - 25 - 30 - 40 1x Quick-Lock bitholder | 12 | 1 | 827.9050 | 12,95 |
| 13 pc. OPTI-LINE bit set | PH (Phillips) : 1 - 2 - 3 PZ (Pozi) : 1 - 2 - 3 SL (Slot) : 0,6 - 0,8 - 1,2 T (Torx®) : 15 - 20 - 25 1x Quick-Lock bitholder | 12 | 1 | 827.9051 | 12,95 |
| 13 pc. OPTI-LINE bit set | T (Torx®) : 1x T10 - 2x T15 - 3x T20 - 3x T25 - 2x T30 - 1x T40 1x Quick-Lock bitholder | 12 | 1 | 827.9052 | 12,95 |
| 13 pc. OPTI-LINE bit set | PH (Phillips) : 1x PH 1 - 4x PH 2 - 1x PH 3 PZ (Pozi) : 1x PZ 1 - 4x PZ 2 - 1x PZ 3 1x Quick-Lock bitholder | 12 | 1 | 827.9053 | 12,95 |

Execution: Complete module for wall shelves with 1/4" OPTI-LINE screw driving bits, bit sets and bit holders.



| Type | Quantity | Packing | Content | pcs/PU | Item no. | € / PU |
|------------------------------------|----------|--------------------|---|--------|----------|---------------|
| Bit '827' 1/4" C6.3 PH | 15 | EV-pack w/ 2 pcs | 5x PH 1, PH2 and PH3 (25mm) | 1 | 827.9900 | 495,00 |
| Bit '827' 1/4" C6.3 PZ | 15 | EV-pack w/ 2 pcs | 5x PZ 1, PZ2 and PZ3 (25mm) | | | |
| Bit '827' 1/4" C6.3 T | 30 | EV-pack w/ 2 pcs | 5x T10, T15, T20, T25, T30 and T40 (25mm) | | | |
| Bit '827' 1/4" C6.3 SL | 15 | EV-pack w/ 2 pcs | 5x SL 0,6x4,5, SL 0,8x5,5 and SL 1,2x6,5 (25mm) | | | |
| Bit '827' 1/4" C6.3 SW | 15 | EV-pack w/ 2 pcs | 5x SW 3, SW 4 and SW 5 (25mm) | | | |
| Bit '828' 1/4" E6.3 PH | 15 | EV-pack w/ 2 pcs | 5x PH 1, PH2 and PH3 (50mm) | | | |
| Bit '828' 1/4" E6.3 PZ | 15 | EV-pack w/ 2 pcs | 5x PZ 1, PZ2 and PZ3 (50mm) | | | |
| Bit '828' 1/4" E6.3 T | 30 | EV-pack w/ 2 pcs | 5x T10, T15, T20, T25, T30 and T40 (50mm) | | | |
| Bit set '827' 1/4" C6.3 PH-PZ-T | 3 | Cassette w/ 13 pcs | 12x Bits (25mm), 1x bit holder | | | |
| Bi tset '827' 1/4" C6.3 PH-PZ-SL-T | 3 | Cassette w/ 13 pcs | 12x Bits (25mm), 1x bit holder | | | |
| Bi tset '827' 1/4" C6.3 T | 3 | Cassette w/ 13 pcs | 12x Bits (25mm), 1x bit holder | | | |
| Bit holder '827' 1/4" E6.3 | 9 | EV-pack w/ 1 pc | 1x Magnetic bit holder with quick-change | | | |

827
OPTI-LINE Bit-set 1/4", in case


827.9100



827.9110



827.9115



PH



PZ



T




DOP



HEX


OPTI

| Description | Content | pcs/PU | Item no. | € / PU |
|---|--|--------|----------|--------------|
| 31 pc OPTI-LINE bit set | PH (Phillips) : 2x PH 1, 3x PH 2 and 1x PH 3 PZ (Pozi) : 2x PZ 1, 8x PZ 2 and 2x PZ 3 T (Torx) : 1x T 10, 2x T 15, 2x T 20, 3x T 25, 3x T 30 and 1x T 40 1x Magnetic quick-lock bit holder | 1 | 827.9100 | 21,83 |
| 30 pc OPTI-LINE bit and sockets set | PH (Phillips) : 1x PH 1, PH 2 and PH 3 PZ (Pozi) : 1x PZ 1, 4x PZ 2, 1x PZ 3 T (Torx) : 1x T 10, T 15, T 20, T 25, T 30 and T 40 HEX (Inbus) : 1x 3, 4 and 5mm Sockets : 1x SW 6, 7, 8, 9, 10, 11, 12, 13 and 14 1x extension 1x adapter 1x ratchet | 1 | 827.9110 | 27,30 |
| 17 pc OPTI-LINE Screw driving/Removal bit set | PH (Phillips) : 1x PH 1, PH 2 and PH 3 PZ (Pozi) : 1x PZ 1, PZ 2 and PZ 3 T (Torx) : 1x T 10, T 15, T 20, T 25, T 30 and T 40 4x screw removal bit 1x quick-lock bitholder | 1 | 827.9115 | 36,84 |

842
Impact socket 1/2" short
ROTEC®

Execution: According to DIN 3129, ISO 2725-2, internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|-------------|
| SW 10 | 40 | 17 | 1/2" | 1 | 842.0010 | 5,26 |
| SW 12 | 40 | 19 | 1/2" | 1 | 842.0012 | 5,26 |
| SW 13 | 40 | 20 | 1/2" | 1 | 842.0013 | 4,81 |
| SW 14 | 40 | 22 | 1/2" | 1 | 842.0014 | 6,87 |
| SW 15 | 40 | 23 | 1/2" | 1 | 842.0015 | 5,64 |
| SW 16 | 40 | 24 | 1/2" | 1 | 842.0016 | 6,45 |
| SW 17 | 40 | 26 | 1/2" | 1 | 842.0017 | 5,72 |
| SW 18 | 40 | 27 | 1/2" | 1 | 842.0018 | 6,45 |
| SW 19 | 40 | 28 | 1/2" | 1 | 842.0019 | 5,64 |
| SW 21 | 40 | 30 | 1/2" | 1 | 842.0021 | 5,61 |

| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 22 | 40 | 32 | 1/2" | 1 | 842.0022 | 7,71 |
| SW 24 | 40 | 34 | 1/2" | 1 | 842.0024 | 6,63 |
| SW 27 | 40 | 38 | 1/2" | 1 | 842.0027 | 9,27 |
| SW 28 | 40 | 40 | 1/2" | 1 | 842.0028 | 13,11 |
| SW 30 | 40 | 42 | 1/2" | 1 | 842.0030 | 11,13 |
| SW 32 | 40 | 44 | 1/2" | 1 | 842.0032 | 11,63 |
| SW 36 | 40 | 50 | 1/2" | 1 | 842.0036 | 17,16 |
| SW 41 | 50 | 56 | 1/2" | 1 | 842.0041 | 29,89 |
| SW 46 | 50 | 62 | 1/2" | 1 | 842.0046 | 42,71 |

Impact socket 1/2" long
ROTEC®

Execution: Internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 10 | 80 | 17 | 1/2" | 1 | 842.1010 | 9,61 |
| SW 12 | 80 | 19 | 1/2" | 1 | 842.1012 | 9,61 |
| SW 13 | 80 | 20 | 1/2" | 1 | 842.1013 | 7,78 |
| SW 14 | 80 | 22 | 1/2" | 1 | 842.1014 | 9,45 |
| SW 15 | 80 | 23 | 1/2" | 1 | 842.1015 | 9,24 |
| SW 16 | 80 | 24 | 1/2" | 1 | 842.1016 | 10,44 |
| SW 17 | 80 | 26 | 1/2" | 1 | 842.1017 | 9,07 |
| SW 18 | 80 | 27 | 1/2" | 1 | 842.1018 | 10,68 |
| SW 19 | 80 | 28 | 1/2" | 1 | 842.1019 | 8,80 |

| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 21 | 80 | 30 | 1/2" | 1 | 842.1021 | 11,13 |
| SW 22 | 80 | 32 | 1/2" | 1 | 842.1022 | 11,63 |
| SW 24 | 80 | 34 | 1/2" | 1 | 842.1024 | 10,88 |
| SW 27 | 80 | 38 | 1/2" | 1 | 842.1027 | 16,32 |
| SW 28 | 80 | 40 | 1/2" | 1 | 842.1028 | 16,02 |
| SW 30 | 80 | 42 | 1/2" | 1 | 842.1030 | 19,80 |
| SW 32 | 80 | 44 | 1/2" | 1 | 842.1032 | 20,02 |
| SW 36 | 80 | 50 | 1/2" | 1 | 842.1036 | 21,82 |

Adapter 1/2"
ROTEC®

Execution: Internal square drive according to DIN 3121, ISO 1174.

| A ₁ | A ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|--------------|
| 1/2" | 3/4" | 1 | 842.9001 | 30,12 |

Extension 1/2"
ROTEC®

Execution: Internal square drive according to DIN 3121, ISO 1174.

| A ₁ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|--------------|
| 1/2" | 125 | 1 | 842.9100 | 22,58 |
| 1/2" | 175 | 1 | 842.9101 | 25,78 |
| 1/2" | 250 | 1 | 842.9102 | 28,37 |


Locking pin for 1/2" sockets
ROTEC®


| Description | pcs/PU | Item no. | € / PU |
|------------------|--------|----------|--------------|
| Locking pin 1/2" | 10 | 842.9200 | 35,09 |

Cardan joint for 1/2" sockets



| A ₁ | A ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|--------|
| 1/2" | 1/2" | 1 | 842.9400 | 22,23 |




| K ₁ | L ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 17 | 50 | 30 | 3/4" | 1 | 843.0017 | 20,13 |
| SW 19 | 50 | 32 | 3/4" | 1 | 843.0019 | 20,13 |
| SW 21 | 50 | 35 | 3/4" | 1 | 843.0021 | 20,13 |
| SW 22 | 50 | 36 | 3/4" | 1 | 843.0022 | 20,13 |
| SW 24 | 50 | 38 | 3/4" | 1 | 843.0024 | 20,13 |
| SW 27 | 52 | 42 | 3/4" | 1 | 843.0027 | 20,13 |
| SW 30 | 52 | 46 | 3/4" | 1 | 843.0030 | 20,60 |

Execution: According to DIN 3129, ISO 2725-2, internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

| K ₁ | L ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 32 | 56 | 48 | 3/4" | 1 | 843.0032 | 20,60 |
| SW 36 | 58 | 54 | 3/4" | 1 | 843.0036 | 25,47 |
| SW 41 | 60 | 60 | 3/4" | 1 | 843.0041 | 33,09 |
| SW 46 | 64 | 67 | 3/4" | 1 | 843.0046 | 36,46 |
| SW 50 | 70 | 70 | 3/4" | 1 | 843.0050 | 45,14 |
| SW 55 | 75 | 78 | 3/4" | 1 | 843.0055 | 59,19 |

Impact socket 3/4" long


| K ₁ | L ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 17 | 90 | 30 | 3/4" | 1 | 843.1017 | 25,78 |
| SW 19 | 90 | 32 | 3/4" | 1 | 843.1019 | 25,78 |
| SW 21 | 90 | 35 | 3/4" | 1 | 843.1021 | 25,78 |
| SW 22 | 90 | 36 | 3/4" | 1 | 843.1022 | 25,78 |
| SW 24 | 90 | 38 | 3/4" | 1 | 843.1024 | 25,78 |
| SW 27 | 90 | 42 | 3/4" | 1 | 843.1027 | 27,60 |
| SW 30 | 90 | 46 | 3/4" | 1 | 843.1030 | 29,13 |

Execution: Internal square drive according to DIN 3121, ISO 1174.


Application: Suited for use on all commonly used pneumatic and electric machines.

| K ₁ | L ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|---------------|
| SW 32 | 90 | 48 | 3/4" | 1 | 843.1032 | 30,97 |
| SW 36 | 90 | 54 | 3/4" | 1 | 843.1036 | 36,46 |
| SW 41 | 90 | 60 | 3/4" | 1 | 843.1041 | 54,30 |
| SW 46 | 90 | 67 | 3/4" | 1 | 843.1046 | 60,25 |
| SW 50 | 90 | 70 | 3/4" | 1 | 843.1050 | 76,73 |
| SW 55 | 90 | 78 | 3/4" | 1 | 843.1055 | 104,95 |
| SW 60 | 90 | 85 | 3/4" | 1 | 843.1060 | 100,53 |

Adapter 3/4"


Execution: Internal square drive according to DIN 3121, ISO 1174.

| A ₁ | A ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|--------------|
| 3/4" | 1/2" | 1 | 843.9000 | 25,16 |
| 3/4" | 1" | 1 | 843.9001 | 28,22 |


Extension 3/4"


Execution: Internal square drive according to DIN 3121, ISO 1174.

| A ₁ | L ₁ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|--------------|
| 3/4" | 75 | 1 | 843.9100 | 33,56 |
| 3/4" | 100 | 1 | 843.9101 | 39,51 |
| 3/4" | 175 | 1 | 843.9102 | 45,46 |
| 3/4" | 200 | 1 | 843.9103 | 45,46 |
| 3/4" | 250 | 1 | 843.9104 | 48,35 |
| 3/4" | 325 | 1 | 843.9105 | 75,21 |

Locking pin for 3/4" sockets


| Description | pcs/PU | Item no. | € / PU |
|------------------|--------|----------|--------------|
| Locking pin 3/4" | 10 | 843.9200 | 48,05 |



| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 17 | 60 | 32 | 1" | 1 | 844.0017 | 26,08 |
| SW 19 | 60 | 36 | 1" | 1 | 844.0019 | 26,08 |
| SW 21 | 60 | 38 | 1" | 1 | 844.0021 | 26,08 |
| SW 22 | 60 | 40 | 1" | 1 | 844.0022 | 26,08 |
| SW 24 | 62 | 42 | 1" | 1 | 844.0024 | 26,08 |
| SW 27 | 62 | 46 | 1" | 1 | 844.0027 | 27,45 |
| SW 30 | 62 | 50 | 1" | 1 | 844.0030 | 27,60 |
| SW 32 | 62 | 52 | 1" | 1 | 844.0032 | 27,60 |
| SW 34 | 64 | 54 | 1" | 1 | 844.0034 | 30,36 |
| SW 36 | 68 | 56 | 1" | 1 | 844.0036 | 30,36 |

Execution: According to DIN 3129, ISO 2725-2, internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|-----|----------------|--------|----------|---------------|
| SW 38 | 68 | 60 | 1" | 1 | 844.0038 | 37,37 |
| SW 41 | 68 | 62 | 1" | 1 | 844.0041 | 37,37 |
| SW 46 | 70 | 68 | 1" | 1 | 844.0046 | 49,87 |
| SW 50 | 70 | 74 | 1" | 1 | 844.0050 | 63,30 |
| SW 55 | 85 | 80 | 1" | 1 | 844.0055 | 76,73 |
| SW 60 | 87 | 85 | 1" | 1 | 844.0060 | 101,90 |
| SW 65 | 93 | 95 | 1" | 1 | 844.0065 | 119,74 |
| SW 70 | 100 | 105 | 1" | 1 | 844.0070 | 156,97 |
| SW 85 | 105 | 120 | 1" | 1 | 844.0085 | 304,16 |

Impact socket 1" long


| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----|----------------|--------|----------|--------------|
| SW 17 | 90 | 32 | 1" | 1 | 844.1017 | 37,37 |
| SW 19 | 90 | 36 | 1" | 1 | 844.1019 | 37,37 |
| SW 21 | 90 | 38 | 1" | 1 | 844.1021 | 37,37 |
| SW 22 | 90 | 40 | 1" | 1 | 844.1022 | 37,37 |
| SW 24 | 90 | 42 | 1" | 1 | 844.1024 | 37,37 |
| SW 27 | 90 | 46 | 1" | 1 | 844.1027 | 37,37 |
| SW 30 | 90 | 50 | 1" | 1 | 844.1030 | 37,37 |
| SW 32 | 90 | 52 | 1" | 1 | 844.1032 | 37,37 |
| SW 34 | 90 | 54 | 1" | 1 | 844.1034 | 45,46 |
| SW 36 | 90 | 56 | 1" | 1 | 844.1036 | 49,87 |

Execution: Internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

| K ₁ | l ₁ | D | K ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|-----|----------------|--------|----------|---------------|
| SW 38 | 90 | 60 | 1" | 1 | 844.1038 | 49,87 |
| SW 41 | 90 | 62 | 1" | 1 | 844.1041 | 63,30 |
| SW 46 | 95 | 68 | 1" | 1 | 844.1046 | 76,73 |
| SW 55 | 100 | 80 | 1" | 1 | 844.1055 | 90,00 |
| SW 60 | 110 | 85 | 1" | 1 | 844.1060 | 112,42 |
| SW 65 | 120 | 95 | 1" | 1 | 844.1065 | 139,11 |
| SW 70 | 125 | 105 | 1" | 1 | 844.1070 | 262,75 |
| SW 75 | 125 | 105 | 1" | 1 | 844.1075 | 298,21 |
| SW 80 | 125 | 110 | 1" | 1 | 844.1080 | 327,96 |
| SW 85 | 125 | 110 | 1" | 1 | 844.1085 | 499,56 |

Adapter 1"


Execution: Internal square drive according to DIN 3121, ISO 1174.

| A ₁ | A ₂ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|--------------|
| 1" | 3/4" | 1 | 844.9000 | 40,73 |
| 1" | 1.1/2" | 1 | 844.9001 | 60,25 |

Extension 1"


Execution: Internal square drive according to DIN 3121, ISO 1174.

| A ₁ | l ₁ | pcs/PU | Item no. | € / PU |
|----------------|----------------|--------|----------|---------------|
| 1" | 175 | 1 | 844.9100 | 90,00 |
| 1" | 250 | 1 | 844.9101 | 107,84 |
| 1" | 325 | 1 | 844.9102 | 149,49 |


Locking pin for 1" sockets


| Description | pcs/PU | Item no. | € / PU |
|----------------|--------|----------|--------------|
| Locking pin 1" | 10 | 844.9200 | 51,86 |




Awls, punches and scribers

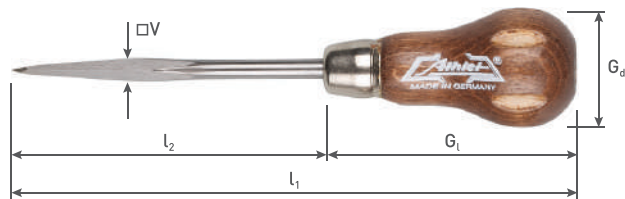


A090
Reamer, square, wooden handle

Execution: Reamer with wooden handle and metallic cap, continuous blade made from CrV-steel, polished.
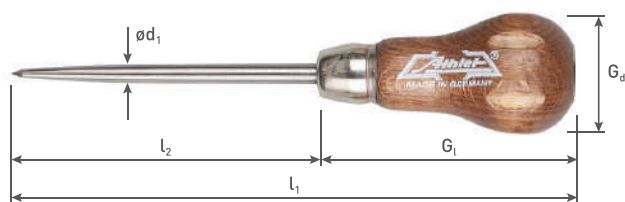
| V | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | € / pc |
|---|----------------|----------------|----------------|----------------|----------------|--------|-------------|--------|
| 6 | 95 | 175 | 60 | 80 | 38 | 12 | 09.632.0600 | 10,41 |


632
Piercing awl, round, wooden handle

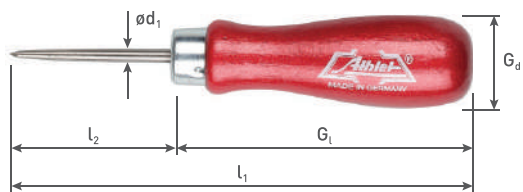Execution: Piercing awl with wooden handle and metallic cap, continuous blade made from CrV-steel, polished.


| d ₁ | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | € / pc |
|----------------|----------------|----------------|----------------|----------------|----------------|--------|-------------|--------|
| 6 | 95 | 175 | 50 | 80 | 38 | 12 | 09.652.0600 | 9,65 |


**652
/6**
Piercing awl, round, wooden handle, red

Execution: Piercing awl with wooden handle, blade made from CrV-steel, polished.

| d ₁ | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | € / pc |
|----------------|----------------|----------------|----------------|----------------|----------------|--------|-------------|--------|
| 4 | 40 | 125 | 25 | 85 | 26 | 12 | 09.652.0400 | 5,36 |


**652
/4**

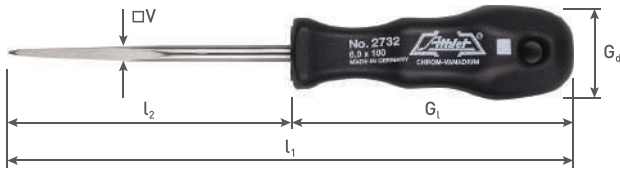1C Reamer, square




Execution: Reamer with 1C handle, blade made from CrV-steel, polished.

| V | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|---|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| 6 | 100 | 200 | 60 | 100 | 33 | 12 | 09.2732.0600 | 8,12 |



2732

1C Piercing awl, round

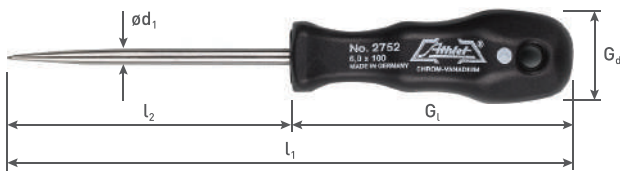


Execution: Piercing awl with 1C handle, blade made from CrV-steel, polished.

| d ₁ | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | €/pc |
|----------------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| 6 | 100 | 200 | 50 | 100 | 33 | 12 | 09.2752.0600 | 7,23 |



2752

Reamer, square, plastic handle (CA)

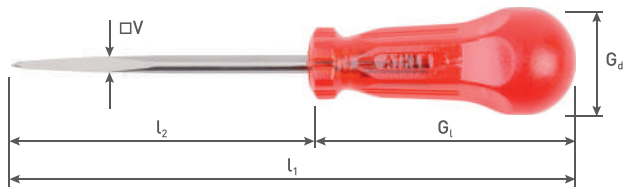


Execution: Reamer with handle made from cellulose acetate, blade made from CrV-steel, polished.

| V | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|---|----------------|----------------|----------------|----------------|----------------|--------|-------------|-------------|
| 4 | 90 | 170 | 30 | 80 | 36 | 12 | 09.732.0400 | 7,01 |
| 6 | 100 | 180 | 60 | 80 | 36 | 12 | 09.732.0600 | 7,91 |



732

Piercing awl, round, plastic handle (CA)

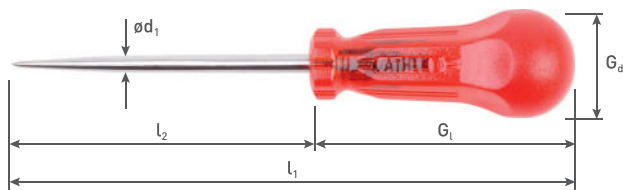


Execution: Piercing awl with handle made from cellulose acetate, blade made from CrV-steel, polished.

| d ₁ | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|----------------|----------------|----------------|----------------|----------------|----------------|--------|-------------|-------------|
| 4 | 90 | 170 | 25 | 80 | 36 | 12 | 09.752.0400 | 6,21 |
| 6 | 100 | 180 | 50 | 80 | 36 | 12 | 09.752.0600 | 7,06 |



752

Reamer, square, plastic handle

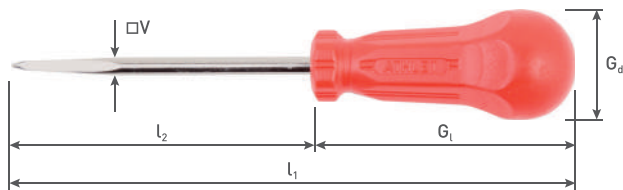


Execution: Reamer with plastic handle, blade made from special steel, nickel-plated.

| V | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|---|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| 6 | 100 | 180 | 40 | 80 | 36 | 12 | 09.3732.0600 | 5,48 |



3732

Piercing awl, round, plastic handle

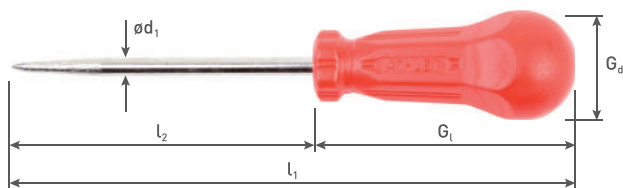

Execution: Piercing awl with plastic handle, blade made from special steel, nickel-plated.


| d ₁ | l ₂ | l ₁ | l ₃ | G ₁ | G _d | pcs/PU | Item no. | €/ pc |
|----------------|----------------|----------------|----------------|----------------|----------------|--------|--------------|-------------|
| 4 | 90 | 170 | 30 | 80 | 36 | 12 | 09.3752.0400 | 4,85 |
| 6 | 100 | 180 | 40 | 80 | 36 | 12 | 09.3752.0600 | 5,53 |



3752

Round punch

Execution: Round punch, made from special steel, hardened cutting edge, polished pipe, lacquered handle, according to DIN 7200 B.



| d ₁ | l ₁ | pcs/PU | Item no. | €/ pc |
|----------------|----------------|--------|-------------|-------|
| 1 | 105 | 6 | 09.183.0100 | 4,21 |
| 2 | 105 | 6 | 09.183.0200 | 4,21 |
| 3 | 105 | 6 | 09.183.0300 | 4,21 |
| 4 | 110 | 6 | 09.183.0400 | 4,21 |
| 5 | 115 | 6 | 09.183.0500 | 4,21 |
| 6 | 115 | 6 | 09.183.0600 | 4,21 |
| 7 | 120 | 6 | 09.183.0700 | 4,89 |
| 8 | 120 | 6 | 09.183.0800 | 5,48 |
| 9 | 125 | 6 | 09.183.0900 | 6,08 |
| 10 | 125 | 6 | 09.183.1000 | 6,84 |
| 11 | 125 | 6 | 09.183.1100 | 8,33 |
| 12 | 130 | 6 | 09.183.1200 | 9,35 |
| 13 | 130 | 6 | 09.183.1300 | 10,67 |

| d ₁ | l ₁ | pcs/PU | Item no. | €/ pc |
|----------------|----------------|--------|-------------|-------|
| 14 | 135 | 6 | 09.183.1400 | 11,69 |
| 15 | 135 | 6 | 09.183.1500 | 12,92 |
| 16 | 140 | 6 | 09.183.1600 | 15,09 |
| 17 | 140 | 6 | 09.183.1700 | 16,83 |
| 18 | 150 | 6 | 09.183.1800 | 18,57 |
| 19 | 150 | 6 | 09.183.1900 | 20,36 |
| 20 | 160 | 6 | 09.183.2000 | 23,04 |
| 21 | 160 | 6 | 09.183.2100 | 25,46 |
| 22 | 160 | 6 | 09.183.2200 | 26,22 |
| 23 | 160 | 6 | 09.183.2300 | 29,58 |
| 24 | 160 | 6 | 09.183.2400 | 31,54 |
| 25 | 160 | 6 | 09.183.2500 | 33,70 |

Arch punch

Execution: Arch punch, made from special steel, hardened cutting edge, polished pipe, lacquered handle, according to DIN 7200 A.

Application: For punching out leather, cardboard, rubber and other soft materials.



| d ₁ | l ₁ | pcs/PU | Item no. | €/ pc |
|----------------|----------------|--------|-------------|-------|
| 1 | 105 | 1 | 09.181.0100 | 7,86 |
| 2 | 105 | 1 | 09.181.0200 | 7,86 |
| 3 | 105 | 1 | 09.181.0300 | 7,86 |
| 4 | 105 | 1 | 09.181.0400 | 7,86 |
| 5 | 110 | 1 | 09.181.0500 | 7,86 |
| 6 | 110 | 1 | 09.181.0600 | 7,86 |
| 7 | 120 | 1 | 09.181.0700 | 8,12 |
| 8 | 120 | 1 | 09.181.0800 | 8,12 |
| 9 | 120 | 1 | 09.181.0900 | 8,42 |
| 10 | 130 | 1 | 09.181.1000 | 9,52 |
| 11 | 130 | 1 | 09.181.1100 | 10,71 |
| 12 | 130 | 1 | 09.181.1200 | 11,56 |
| 13 | 140 | 1 | 09.181.1300 | 13,35 |
| 14 | 140 | 1 | 09.181.1400 | 13,77 |
| 15 | 140 | 1 | 09.181.1500 | 15,30 |
| 16 | 140 | 1 | 09.181.1600 | 16,70 |
| 17 | 145 | 1 | 09.181.1700 | 17,89 |
| 18 | 145 | 1 | 09.181.1800 | 19,21 |
| 19 | 145 | 1 | 09.181.1900 | 20,27 |
| 20 | 160 | 1 | 09.181.2000 | 22,95 |
| 21 | 160 | 1 | 09.181.2100 | 25,12 |
| 22 | 160 | 1 | 09.181.2200 | 25,84 |
| 23 | 170 | 1 | 09.181.2300 | 28,60 |
| 24 | 170 | 1 | 09.181.2400 | 30,60 |
| 25 | 170 | 1 | 09.181.2500 | 32,81 |
| 26 | 170 | 1 | 09.181.2600 | 34,30 |
| 27 | 180 | 1 | 09.181.2700 | 36,59 |
| 28 | 180 | 1 | 09.181.2800 | 39,48 |


| d ₁ | l ₁ | pcs/PU | Item no. | €/ pc |
|----------------|----------------|--------|-------------|--------|
| 29 | 180 | 1 | 09.181.2900 | 41,61 |
| 30 | 190 | 1 | 09.181.3000 | 44,12 |
| 31 | 190 | 1 | 09.181.3100 | 46,58 |
| 32 | 190 | 1 | 09.181.3200 | 48,83 |
| 33 | 200 | 1 | 09.181.3300 | 51,64 |
| 34 | 200 | 1 | 09.181.3400 | 54,06 |
| 35 | 200 | 1 | 09.181.3500 | 56,19 |
| 36 | 200 | 1 | 09.181.3600 | 58,82 |
| 37 | 210 | 1 | 09.181.3700 | 61,67 |
| 38 | 210 | 1 | 09.181.3800 | 65,79 |
| 39 | 210 | 1 | 09.181.3900 | 69,36 |
| 40 | 210 | 1 | 09.181.4000 | 73,10 |
| 41 | 220 | 1 | 09.181.4100 | 76,42 |
| 42 | 220 | 1 | 09.181.4200 | 81,01 |
| 43 | 220 | 1 | 09.181.4300 | 83,77 |
| 44 | 220 | 1 | 09.181.4400 | 89,59 |
| 45 | 220 | 1 | 09.181.4500 | 93,80 |
| 46 | 230 | 1 | 09.181.4600 | 98,69 |
| 47 | 230 | 1 | 09.181.4700 | 104,85 |
| 48 | 230 | 1 | 09.181.4800 | 112,12 |
| 49 | 230 | 1 | 09.181.4900 | 117,90 |
| 50 | 230 | 1 | 09.181.5000 | 123,46 |
| 55 | 240 | 1 | 09.181.5500 | 164,94 |
| 60 | 260 | 1 | 09.181.6000 | 208,00 |
| 65 | 260 | 1 | 09.181.6500 | 253,39 |
| 70 | 280 | 1 | 09.181.7000 | 275,87 |
| 75 | 300 | 1 | 09.181.7500 | 331,08 |


185

| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|------------------------|------|---------|------------------|--------|-------------|---------------|
| 10 pc set Arch punches | 181 | 1x ø2 | 09.181.0200 | 1 | 09.185.0010 | 204,17 |
| | 181 | 1x ø4 | 09.181.0400 | | | |
| | 181 | 1x ø6 | 09.181.0600 | | | |
| | 181 | 1x ø8 | 09.181.0800 | | | |
| | 181 | 1x ø10 | 09.181.1000 | | | |
| | 181 | 1x ø12 | 09.181.1200 | | | |
| | 181 | 1x ø14 | 09.181.1400 | | | |
| | 181 | 1x ø16 | 09.181.1600 | | | |
| | 181 | 1x ø18 | 09.181.1800 | | | |
| | 181 | 1x ø20 | 09.181.2000 | | | |
| 15 pc set Arch punches | 181 | 1x ø2 | 09.181.0200 | 1 | 09.185.0030 | 447,40 |
| | 181 | 1x ø4 | 09.181.0400 | | | |
| | 181 | 1x ø6 | 09.181.0600 | | | |
| | 181 | 1x ø8 | 09.181.0800 | | | |
| | 181 | 1x ø10 | 09.181.1000 | | | |
| | 181 | 1x ø12 | 09.181.1200 | | | |
| | 181 | 1x ø14 | 09.181.1400 | | | |
| | 181 | 1x ø16 | 09.181.1600 | | | |
| | 181 | 1x ø18 | 09.181.1800 | | | |
| | 181 | 1x ø20 | 09.181.2000 | | | |
| | 181 | 1x ø22 | 09.181.2200 | | | |
| | 181 | 1x ø24 | 09.181.2400 | | | |
| | 181 | 1x ø26 | 09.181.2600 | | | |
| | 181 | 1x ø28 | 09.181.2800 | | | |
| | 181 | 1x ø30 | 09.181.3000 | | | |

Scriber Tungsten carbide

Execution: Scriber with tungsten carbide tip and hexagon shaft.

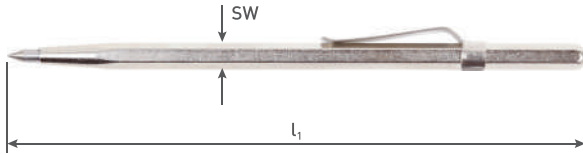


| l_1 | Type | SW | pcs/PU | Item no. | €/pc |
|-------|-------|----|--------|-------------|------|
| 150 | 6-knt | 6 | 12 | 09.258.0010 | 4,34 |



Scriber

Execution: Scriber with exchangeable straight and offset hardened steel tips, burnished. 09.1257.0000 = set of spare tips.

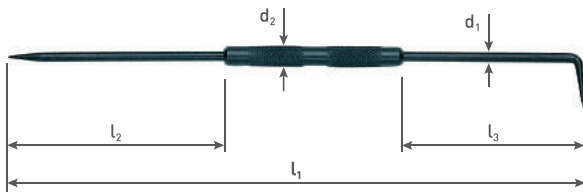

| l_1 | l_2 | l_3 | d_1 | d_2 | pcs/PU | Item no. | €/pc |
|-------|-------|-------|-------|-------|--------|--------------|------|
| 250 | 100 | 75 | 4 | 8 | 6 | 09.257.2500 | 4,29 |
| - | 100 | 75 | 4 | - | 6 | 09.1257.0000 | 2,00 |






Chisels and punches




A110 Safety handle for chisels

Execution: Safety handle for chisels with standard profiles, from plasticized PVC, for self-assembly.

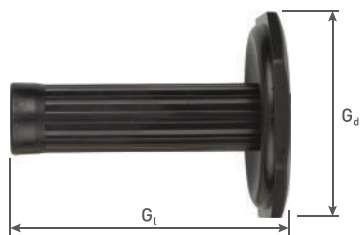

| G_l | G_d | A | SxW | pcs/PU | Item no. | €/ pc |
|-------|-------|----|-------|--------|-------------|-------------|
| 115 | 85 | | 26x7 | 1 | 11.115.0010 | 4,55 |
| 115 | 85 | | 23x13 | 1 | 11.115.0020 | 4,76 |
| 115 | 85 | | 26x13 | 1 | 11.115.0030 | 2,89 |
| 115 | 85 | 18 | | 1 | 11.115.0040 | 4,00 |
| 115 | 85 | 16 | | 1 | 11.115.0050 | 2,76 |
| 115 | 85 | | 20x12 | 1 | 11.115.0060 | 3,83 |

115




Flat chisel

Execution: Flat chisel made from air hardened CrV flat or octagonal steel bar. The blade is fully hardened and regrindable. According to DIN 6453.



| l_1 | b | A | SxW | pcs/PU | Item no. | €/ pc |
|-------|----|----|-------|--------|-------------|--------------|
| 100 | 15 | | 14x9 | 10 | 11.120.0100 | 5,80 |
| 125 | 15 | | 14x9 | 10 | 11.120.0120 | 5,92 |
| 125 | 15 | 10 | | 10 | 11.120.0121 | 5,08 |
| 150 | 18 | | 17x11 | 10 | 11.120.0150 | 6,76 |
| 150 | 18 | 12 | | 10 | 11.120.0151 | 6,00 |
| 175 | 21 | | 20x12 | 10 | 11.120.0170 | 7,16 |
| 200 | 24 | | 23x13 | 10 | 11.120.0200 | 8,44 |
| 250 | 25 | | 23x13 | 10 | 11.120.0250 | 9,44 |
| 300 | 15 | | 23x13 | 10 | 11.120.0300 | 10,72 |

120




Slitting chisel, oval

Execution: Slitting chisel made from air hardened CrV flat steel bar. The blade is fully hardened.




| l_1 | b | SxW | pcs/PU | Item no. | €/ pc |
|-------|----|------|--------|-------------|--------------|
| 230 | 26 | 26x7 | 10 | 11.112.0230 | 12,71 |
| 250 | 50 | 50x5 | 1 | 11.112.250 | 22,70 |

112




Slitting chisel, oval, with safety handle

Execution: Slitting chisel made from air hardened CrV flat steel bar. The blade is fully hardened.

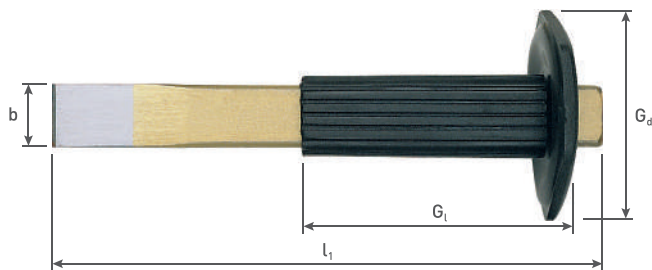

| l_1 | b | SxW | G_l | G_d | pcs/PU | Item no. | €/ pc |
|-------|----|------|-------|-------|--------|-------------|--------------|
| 230 | 26 | 26x7 | 115 | 85 | 1 | 11.113.0230 | 17,26 |

113




Cape chisel



Execution: Cape chisel made from air hardened CrV flat or octagonal steel bar. The blade is fully hardened and regrindable. According to DIN 6451.

| l_1 | b | T | A | SxW | pcs/PU | Item no. | €/ pc |
|-------|----|---|----|-------|--------|-------------|-------------|
| 125 | 20 | 5 | 10 | | 10 | 11.122.0121 | 5,08 |
| 150 | 20 | 6 | | 17x11 | 10 | 11.122.0150 | 6,72 |

122




Masonry chisel, oval



Execution: Masonry chisel made from air hardened CrV flat steel bar. The blade is fully hardened and regrindable. According to DIN 7254 A.

| l_1 | b | SxW | pcs/PU | Item no. | €/ pc |
|-------|----|-------|--------|-------------|--------------|
| 200 | 26 | 20x12 | 10 | 11.130.0200 | 8,16 |
| 250 | 26 | 20x12 | 10 | 11.130.0250 | 9,00 |
| 300 | 29 | 23x13 | 10 | 11.130.0300 | 10,72 |
| 350 | 29 | 23x13 | 10 | 11.130.0350 | 11,88 |
| 400 | 29 | 23x13 | 5 | 11.130.0400 | 13,08 |
| 500 | 32 | 26x13 | 5 | 11.130.0500 | 19,96 |

130




Masonry chisel, octagonal



Execution: Masonry chisel made from air hardened CrV octagonal steel bar. The blade is fully hardened and regrindable. According to DIN 7254.

| l_1 | b | A | pcs/PU | Item no. | €/ pc |
|-------|----|----|--------|-------------|--------------|
| 200 | 20 | 14 | 10 | 11.132.2014 | 7,44 |
| 200 | 23 | 16 | 10 | 11.132.2016 | 8,60 |
| 250 | 23 | 16 | 10 | 11.132.2516 | 9,00 |
| 300 | 23 | 16 | 10 | 11.132.3016 | 10,20 |
| 300 | 26 | 18 | 10 | 11.132.3018 | 10,96 |
| 350 | 26 | 18 | 5 | 11.132.3518 | 12,12 |
| 400 | 26 | 18 | 5 | 11.132.4018 | 12,92 |

132



Pointed chisel, octagonal



Execution: Pointed chisel made from air hardened CrV octagonal steel bar. The blade is fully hardened and regrindable. According to DIN 7256.

| l_1 | A | pcs/PU | Item no. | €/ pc |
|-------|----|--------|-------------|--------------|
| 200 | 14 | 10 | 11.134.2014 | 7,56 |
| 250 | 16 | 10 | 11.134.2516 | 9,04 |
| 300 | 16 | 10 | 11.134.3016 | 10,20 |
| 300 | 18 | 10 | 11.134.3018 | 11,16 |
| 350 | 18 | 10 | 11.134.3518 | 12,36 |
| 400 | 18 | 5 | 11.134.4018 | 13,32 |
| 500 | 20 | 5 | 11.134.5020 | 19,72 |

134



Tiler's chisel, square

Execution: Tiler's chisel made from CrV square steel bar. The blade is fully hardened.

| l_1 | b | V | pcs/PU | Item no. | €/ pc |
|-------|----|---|--------|-------------|-------------|
| 100 | 10 | 8 | 10 | 11.150.1010 | 3,88 |




150



Electrician's chisel, square

Execution: Electricien's chisel made from air hardened CrV square steel bar. The blade is fully hardened.

| l_1 | b | V | pcs/PU | Item no. | €/ pc |
|-------|----|---|--------|-------------|-------------|
| 200 | 8 | 6 | 10 | 11.136.2008 | 4,12 |
| 200 | 10 | 8 | 10 | 11.136.2010 | 4,56 |
| 200 | 12 | 8 | 10 | 11.136.2012 | 4,56 |
| 250 | 10 | 8 | 10 | 11.136.2510 | 5,24 |
| 250 | 12 | 8 | 10 | 11.136.2512 | 5,24 |
| 300 | 12 | 8 | 10 | 11.136.3012 | 6,16 |




136




Electrician's chisel, octagonal

Execution: Electricien's chisel made from air hardened CrV octagonal steel bar. The blade is fully hardened.

| l_1 | b | A | pcs/PU | Item no. | €/ pc |
|-------|----|----|--------|-------------|-------------|
| 250 | 12 | 10 | 10 | 11.138.2512 | 6,08 |



138




Grooving chisel, oval

Execution: Grooving chisel made from flat special steel bar. The blade is fully hardened, cutting edge is ground.

| l_1 | b | SxW | pcs/PU | Item no. | €/ pc |
|-------|-----|-------|--------|-------------|--------------|
| 230 | 60 | 20x12 | 5 | 11.194.0600 | 18,84 |
| 230 | 75 | 23x13 | 5 | 11.194.0750 | 19,56 |
| 230 | 100 | 25x25 | 5 | 11.194.1000 | 28,44 |




194




Nail setter, octagonal

Execution: Nail setter made from air hardened CrMoV octagonal steel bar. The blade is fully hardened.




| L ₁ | A | M | pcs/PU | Item no. | € / pc |
|----------------|----|----|--------|-------------|-------------|
| 140 * | 14 | M6 | 5 | 11.193.0614 | 7,76 |

193



* Phase-out item, available until stock has depleted

Drift punch



162




Execution: Drift punch made from air hardened CrMoV octagonal steel bar, fully hardened. According to DIN 6458.

| d ₁ | l ₁ | A | pcs/PU | Item no. | €/ pc |
|----------------|----------------|----|--------|-------------|-------------|
| 1* | 120 | 10 | 10 | 11.162.0100 | 2,68 |
| 2 | 120 | 10 | 10 | 11.162.0200 | 2,68 |
| 3 | 120 | 10 | 10 | 11.162.0300 | 2,68 |
| 4 | 120 | 10 | 10 | 11.162.0400 | 2,68 |
| 5 | 120 | 10 | 10 | 11.162.0500 | 2,68 |
| 6 | 120 | 10 | 10 | 11.162.0600 | 2,68 |
| 10 | 150 | 12 | 10 | 11.162.1000 | 3,40 |
| 12 | 150 | 14 | 5 | 11.162.1200 | 4,20 |

* Phase-out item, available until stock has depleted

Pin punch




164




Execution: Pin punch made from air hardened CrMoV octagonal steel bar, fully hardened. According to DIN 6450 C.

| d ₁ | l ₂ | l ₁ | A | pcs/PU | Item no. | €/ pc |
|----------------|----------------|----------------|----|--------|-------------|-------------|
| 2 | 30 | 150 | 10 | 10 | 11.164.0200 | 3,60 |
| 2,5 | 40 | 150 | 10 | 10 | 11.164.0250 | 3,60 |
| 3 | 40 | 150 | 10 | 10 | 11.164.0300 | 3,60 |
| 4 | 50 | 150 | 10 | 10 | 11.164.0400 | 3,60 |
| 5 | 50 | 150 | 10 | 10 | 11.164.0500 | 3,60 |
| 6 | 50 | 150 | 10 | 10 | 11.164.0600 | 3,60 |
| 8 | 50 | 150 | 12 | 10 | 11.164.0800 | 3,88 |
| 10 | 50 | 150 | 12 | 10 | 11.164.1000 | 3,88 |
| 12 | 50 | 150 | 14 | 5 | 11.164.1200 | 5,36 |

Center punch




160



Execution: Center punch made from air hardened CrMoV octagonal steel bar, fully hardened. According to DIN 7250.

| d ₁ | l ₁ | A | pcs/PU | Item no. | €/ pc |
|----------------|----------------|----|--------|-------------|-------------|
| 4 | 100 | 10 | 10 | 11.160.1010 | 2,40 |
| 4 | 120 | 10 | 10 | 11.160.1210 | 2,68 |
| 5 | 120 | 12 | 10 | 11.160.1212 | 3,12 |
| 5 | 150 | 12 | 10 | 11.160.1512 | 3,40 |

Center punch with tungsten carbide tip



198




Execution: Center punch made from octagonal special steel bar, with tungsten carbide tip.

| d ₁ | l ₁ | A | pcs/PU | Item no. | €/ pc |
|----------------|----------------|----|--------|-------------|-------------|
| 5 | 120 | 12 | 1 | 11.198.1212 | 9,32 |

Setting pin

Execution: Setting pin made from round special steel bar.

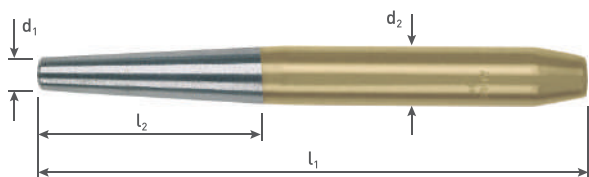

| d_1 | d_2 | l_2 | l_1 | pcs/PU | Item no. | € / pc |
|-------|-------|-------|-------|--------|--------------|--------------|
| 9 | 16 | 120 | 200 | 5 | 11.6155.1600 | 8,56 |
| 10 | 18 | 120 | 200 | 5 | 11.6155.1800 | 10,00 |
| 12 | 20 | 120 | 200 | 5 | 11.6155.2000 | 11,68 |
| 12 | 24 | 150 | 250 | 5 | 11.6155.2400 | 19,52 |

6155

Chisel set

Execution: Set of chisels made from air hardened CrV octagonal steel.



2603

2605

| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---|------|---------------------------------|------------------|--------|--------------|--------------|
| 6 pc set chisels, in plastic tool stand | 120 | 1x Flat chisel 125mm | 11.120.0121 | 1 | 11.2603.0000 | 28,68 |
| | 120 | 1x Flat chisel 150mm | 11.120.0151 | | | |
| | 122 | 1x Cape chisel 125mm | 11.122.0121 | | | |
| | 162 | 1x Drift punch $\varnothing 2$ | 11.162.0200 | | | |
| | 162 | 1x Drift punch $\varnothing 4$ | 11.162.0400 | | | |
| | 160 | 1x Center punch $\varnothing 4$ | 11.160.1010 | | | |
| 6 pc set chisels, in plastic cassette | 120 | 1x Flat chisel 125mm | 11.120.0121 | 1 | 11.2605.0000 | 30,92 |
| | 120 | 1x Flat chisel 150mm | 11.120.0151 | | | |
| | 122 | 1x Cape chisel 125mm | 11.122.0121 | | | |
| | 162 | 1x Drift punch $\varnothing 2$ | 11.162.0200 | | | |
| | 162 | 1x Drift punch $\varnothing 4$ | 11.162.0400 | | | |
| | 160 | 1x Center punch $\varnothing 4$ | 11.160.1010 | | | |

Centre- and drift punch set

Execution: Centre- and drift punch set made from air hardened CrV octagonal steel.



2623 2625

| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|--|------|--------------------|------------------|--------|--------------|--------------|
| 6 pc set centre and drift punches, in plastic tool stand | 162 | 1x Drift punch ø2 | 11.162.0200 | 1 | 11.2623.0000 | 20,52 |
| | 162 | 1x Drift punch ø3 | 11.162.0300 | | | |
| | 162 | 1x Drift punch ø4 | 11.162.0400 | | | |
| | 162 | 1x Drift punch ø5 | 11.162.0500 | | | |
| | 162 | 1x Drift punch ø6 | 11.162.0600 | | | |
| | 160 | 1x Center punch ø4 | 11.160.1010 | | | |
| 6 pc set centre and drift punches, in plastic cassette | 162 | 1x Drift punch ø2 | 11.162.0200 | 1 | 11.2625.0000 | 22,84 |
| | 162 | 1x Drift punch ø3 | 11.162.0300 | | | |
| | 162 | 1x Drift punch ø4 | 11.162.0400 | | | |
| | 162 | 1x Drift punch ø5 | 11.162.0500 | | | |
| | 162 | 1x Drift punch ø6 | 11.162.0600 | | | |
| | 160 | 1x Center punch ø4 | 11.160.1010 | | | |

Pin punch set

Execution: Pin punch set made from air hardened CrV octagonal steel.




2643 2645

| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---|------|-----------------|------------------|--------|--------------|--------------|
| 6 pc set pin punches, in plastic tool stand | 164 | 1x Pin punch ø2 | 11.164.0200 | 1 | 11.2643.0000 | 24,28 |
| | 164 | 1x Pin punch ø3 | 11.164.0300 | | | |
| | 164 | 1x Pin punch ø4 | 11.164.0400 | | | |
| | 164 | 1x Pin punch ø5 | 11.164.0500 | | | |
| | 164 | 1x Pin punch ø6 | 11.164.0600 | | | |
| | 164 | 1x Pin punch ø8 | 11.164.0800 | | | |
| 6 pc set pin punches, in plastic cassette | 164 | 1x Pin punch ø2 | 11.164.0200 | 1 | 11.2645.0000 | 28,64 |
| | 164 | 1x Pin punch ø3 | 11.164.0300 | | | |
| | 164 | 1x Pin punch ø4 | 11.164.0400 | | | |
| | 164 | 1x Pin punch ø5 | 11.164.0500 | | | |
| | 164 | 1x Pin punch ø6 | 11.164.0600 | | | |
| | 164 | 1x Pin punch ø8 | 11.164.0800 | | | |


Lever

Execution: Lever made from CrV-steel, silver painted.




| l_1 | A | V | pcs/PU | Item no. | €/ pc |
|-------|----|----|--------|--------------|--------------|
| 400 | | 14 | 1 | 11.6810.1440 | 28,92 |
| 400 | 17 | | 1 | 11.6810.1740 | 32,08 |

6810



Rolling lever

Execution: Lever made from CrV-steel, silver painted, with rolling head.




| l_1 | d_1 | pcs/PU | Item no. | €/ pc |
|-------|-------|--------|--------------|--------------|
| 400 | 14 | 1 | 11.6815.1440 | 37,40 |

6815

Crowbar, hexagonal

Execution: Crowbar forged from hexagonal special steel, painted, with claw.

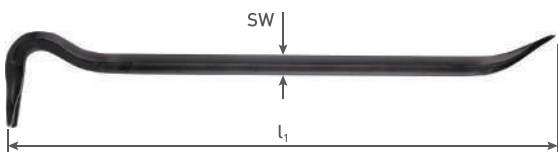

| l_1 | SW | pcs/PU | Item no. | €/ pc |
|-------|----|--------|--------------|--------------|
| 400 | 18 | 1 | 11.6805.0400 | 13,08 |
| 500 | 18 | 1 | 11.6805.0500 | 14,00 |
| 600 | 18 | 1 | 11.6805.0600 | 15,64 |
| 800 | 18 | 1 | 11.6805.0800 | 19,08 |
| 1000 | 18 | 1 | 11.6805.1000 | 23,44 |

6805



Hammers



A120
Plastic hammer


Execution: Plastic hammer with polished ash handle, interchangeable heads made from cellulose acetate.

Application: For delicate assembly work and metal sheet working.


| Nr. | d ₁ | l ₁ | pcs/PU | Item no. | € / pc |
|-----|----------------|----------------|--------|-------------|--------------|
| 1 | 22 | 250 | 6 | 12.925.1022 | 10,56 |
| 2 | 27 | 270 | 6 | 12.925.2027 | 11,72 |
| 3 | 32 | 280 | 6 | 12.925.3032 | 14,60 |
| 4 | 35 | 290 | 6 | 12.925.4035 | 17,56 |
| 5 | 40 | 320 | 6 | 12.925.5040 | 20,72 |
| 6 | 50 | 340 | 6 | 12.925.6050 | 34,68 |
| 7 | 60 | 370 | 2 | 12.925.7060 | 76,04 |

925
Nylon hammer


Execution: Nylon hammer with polished ash handle, interchangeable heads made from wear-resistant nylon.


Application: For assembly work.

| Nr. | d ₁ | l ₁ | pcs/PU | Item no. | € / pc |
|-----|----------------|----------------|--------|-------------|--------------|
| 1 | 22 | 250 | 6 | 12.926.1022 | 10,56 |
| 2 | 27 | 270 | 6 | 12.926.2027 | 11,72 |
| 3 | 32 | 280 | 6 | 12.926.3032 | 14,60 |
| 4 | 35 | 290 | 6 | 12.926.4035 | 17,56 |
| 5 | 40 | 320 | 6 | 12.926.5040 | 20,72 |
| 6 | 50 | 340 | 6 | 12.926.6050 | 34,68 |
| 7 | 60 | 370 | 2 | 12.926.7060 | 91,40 |

926
Spare plastic inserts


Execution: Spare plastic inserts for hammers type '925' (1 pair)

| Nr. | d ₁ | pcs/PU | Item no. | € / pc |
|-----|----------------|--------|--------------|--------------|
| 1 | 22 | 1 | 12.1925.1022 | 1,88 |
| 2 | 27 | 1 | 12.1925.2027 | 3,16 |
| 3 | 32 | 1 | 12.1925.3032 | 4,84 |
| 4 | 35 | 1 | 12.1925.4035 | 5,88 |
| 5 | 40 | 1 | 12.1925.5040 | 7,04 |
| 6 | 50 | 1 | 12.1925.6050 | 11,60 |
| 7 | 60 | 1 | 12.1925.7060 | 17,60 |

1925
Spare nylon inserts


Execution: Spare nylon inserts for hammers type '926' (1 pair)

| Nr. | d ₁ | pcs/PU | Item no. | € / pc |
|-----|----------------|--------|--------------|--------------|
| 1 | 22 | 1 | 12.1926.1022 | 4,36 |
| 2 | 27 | 1 | 12.1926.2027 | 5,88 |
| 3 | 32 | 1 | 12.1926.3032 | 9,16 |
| 4 | 35 | 1 | 12.1926.4035 | 11,96 |
| 5 | 40 | 1 | 12.1926.5040 | 15,00 |
| 6 | 50 | 1 | 12.1926.6050 | 26,64 |
| 7 | 60 | 1 | 12.1926.7060 | 38,16 |

1926

Rubber hammer, black



Execution: Hammer with rubber head and ash shaft, black.

Application: For working on car body parts.

| Nr. | d ₁ | l ₁ | pcs/PU | Item no. | €/pc |
|-----|----------------|----------------|--------|-------------|--------------|
| 0 | 40 | 260 | 2 | 12.928.0040 | 4,76 |
| 1 | 55 | 320 | 2 | 12.928.1055 | 6,12 |
| 2 | 65 | 340 | 2 | 12.928.2065 | 8,76 |
| 3 | 75 | 360 | 2 | 12.928.3075 | 11,28 |
| 4 | 90 | 360 | 1 | 12.928.4090 | 16,08 |

928

Rubber hammer, white



Execution: Hammer with rubber head and ash shaft, natural white. Does not leave colour marks.

Application: For tiling and metal sheet working.

| Nr. | d ₁ | l ₁ | pcs/PU | Item no. | €/pc |
|-----|----------------|----------------|--------|-------------|--------------|
| 1 | 55 | 320 | 2 | 12.929.1055 | 8,12 |
| 2 | 65 | 340 | 2 | 12.929.2065 | 10,24 |
| 3 | 75 | 360 | 1 | 12.929.3075 | 15,64 |

929



Additional range and specialties



798

Cup brush M14 - Twist knot wire, steel

ROTEC



Execution: Cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: Aggressive brush for high-impact cleaning applications on large surfaces. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 65 | M14 | 0,50 | 12.500 | 1 | 798.0005 | 10,68 |
| 65 | M14 | 0,35 | 12.500 | 1 | 798.0010 | 12,22 |

Cup brush M14 - Twist knot wire, stainless steel

ROTEC



Execution: Cup brush with high-grade stainless steel wire and M14 connection for direct mounting on angle grinders.

Application: Aggressive brush for high-impact cleaning applications on large surfaces. Ideal for removing welding slags, paint and oxidised surfaces of Cr-Ni-steels, including stainless steel.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 65 | M14 | 0,50 | 12.500 | 1 | 798.0015 | 17,45 |

Cup brush M14 - Twist knot wire, steel, with guard

ROTEC



Execution: Cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders. Straight type with guard.


Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

When the wires have worn up to the guard, the guard can be removed and the remaining length of the wire can be used.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 65 | M14 | 0,50 | 12.500 | 1 | 798.0020 | 12,12 |
| 80 | M14 | 0,50 | 8.500 | 1 | 798.0025 | 20,12 |
| 100 | M14 | 0,50 | 8.500 | 1 | 798.0030 | 27,54 |
| 120 | M14 | 0,50 | 6.500 | 1 | 798.0035 | 33,81 |

Saucer cup brush M14 - Twist knot wire, steel

ROTEC

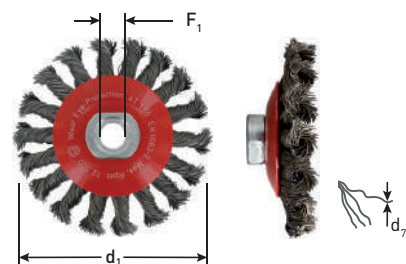

Execution: Saucer cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 100 | M14 | 0,50 | 12.500 | 1 | 798.0040 | 11,72 |

Cup brush M14 - Crimped wire, steel

ROTEC



Execution: Crimped wire cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: For light- to medium-duty brushing applications on flat or irregular surfaces and bevel buffing of low or unalloyed low-carbon steels. Easy to handle due its flexible wires.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 60 | M14 | 0,30 | 12.500 | 1 | 798.0100 | 9,41 |
| 75 | M14 | 0,30 | 12.500 | 1 | 798.0115 | 11,82 |
| 80 | M14 | 0,30 | 8.500 | 1 | 798.0120 | 13,23 |
| 100 | M14 | 0,30 | 8.500 | 1 | 798.0125 | 15,91 |

Cup brush M14 - Crimped wire, stainless steel



Execution: Crimped wire cup brush with high-grade stainless steel wire and M14 connection for direct mounting on angle grinders.

Application: For light- to medium-duty brushing applications on flat or irregular surfaces and bevel buffing of Cr-Ni-steels, including stainless steel. Easy to handle due its flexible wires.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------|
| 60 | M14 | 0,30 | 12.500 | 1 | 798.0105 | 17,58 |

Cup brush M14 - Crimped wire, brass



Execution: Crimped wire cup brush with brass wire and M14 connection for direct mounting on angle grinders.

Application: For light- to medium-duty brushing applications on flat or irregular surfaces and bevel buffing of copper, brass and bronze. Easy to handle due its flexible wires.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------|
| 60 | M14 | 0,30 | 12.500 | 1 | 798.0110 | 20,70 |

Saucer cup brush M14 - Crimped wire, steel




Execution: Saucer cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------|
| 100 | M14 | 0,30 | 12.500 | 1 | 798.0130 | 12,43 |

Wheel brush M14 - Twist knot wire, steel

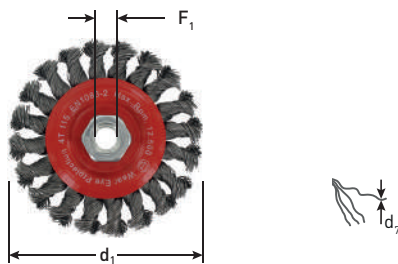


Execution: Twist knot wire wheel with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.
PS: With left-hand knotted wires for longer tool life!

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------|
| 115 | M14 | 0,50 | 12.500 | 1 | 798.0200 | 13,36 |

Wheel brush 22,2mm - Twist knot wire, steel

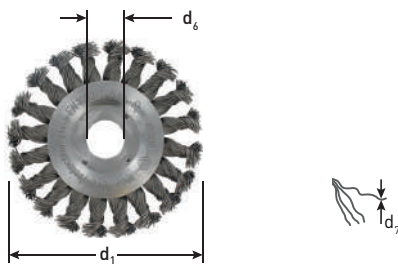

Execution: Twist knot wire wheel with high-grade stainless steel wire.
PS: With left-hand knotted wires for longer tool life!

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | d ₆ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------|
| 115 | 22,2 | 0,50 | 12.500 | 1 | 798.0205 | 13,36 |
| 125 | 22,2 | 0,50 | 12.500 | 1 | 798.0215 | 13,53 |
| 180 | 22,2 | 0,50 | 9.000 | 1 | 798.0230 | 28,70 |

Wheel brush 22,2mm - Twist knot wire, stainless steel




Execution: Twist knot wire wheel with high-grade stainless steel wire.
PS: With left-hand knotted wires for longer tool life!

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of Cr-Ni-steels, including stainless steel.

| d ₁ | d ₆ | d ₇ | Max. RPM | pcs/PU | Item no. | €/PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 115 | 22,2 | 0,50 | 12.500 | 1 | 798.0210 | 27,88 |
| 125 | 22,2 | 0,50 | 12.500 | 1 | 798.0220 | 28,63 |

Wheel brush w. shank 6mm - Crimped wire, steel




Execution: Crimped wire wheel brush with ø6mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with portable drills, drill presses and high-speed hand-held machines. For cleaning and deburring of low- or unalloyed low-carbon steels.

| D x H | d ₂ | d ₇ | Max. RPM | ☞ | pcs/PU | Item no. | €/PU |
|----------|----------------|----------------|----------|----|--------|----------|-------------|
| 50 x 8 | 6 | 0,30 | 4500 | 20 | 1 | 798.0310 | 3,15 |
| 75 x 10 | 6 | 0,30 | 4500 | 10 | 1 | 798.0315 | 4,26 |
| 75 x 15 | 6 | 0,30 | 4500 | 10 | 1 | 798.0320 | 7,54 |
| 100 x 12 | 6 | 0,30 | 4500 | 10 | 1 | 798.0345 | 4,61 |

Wheel brush w. shank 6mm - Crimped wire, brass




Execution: Crimped wire wheel brush with ø6mm shank and brass wire. Suitable for industrial use.

Application: Can be used with (cordless) portable drills and drill presses. For cleaning and deburring of copper, brass and bronze.

| D x H | d ₂ | d ₇ | Max. RPM | ☞ | pcs/PU | Item no. | €/PU |
|---------|----------------|----------------|----------|----|--------|----------|--------------|
| 75 x 10 | 6 | 0,30 | 4500 | 10 | 1 | 798.0330 | 10,74 |

Wheel brush w. shank 6mm - Crimped wire, stainless steel

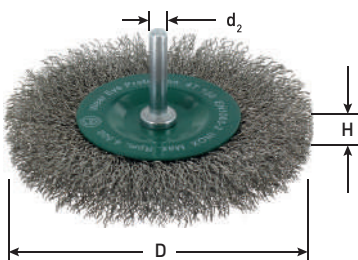

Execution: Crimped wire wheel brush with ø6mm shank and high-grade stainless steel wire. Suitable for industrial use.

Application: Can be used with (cordless) portable drills and drill presses. For cleaning and deburring of Cr-Ni-steels, including stainless steel.

| D x H | d ₂ | d ₇ | Max. RPM | ☞ | pcs/PU | Item no. | €/PU |
|----------|----------------|----------------|----------|----|--------|----------|--------------|
| 100 x 12 | 6 | 0,30 | 4500 | 10 | 1 | 798.0350 | 10,61 |

Straight cup brush w. shank 6mm - Crimped wire, steel



Execution: Crimped wire end brush with ø6mm shank and hardened high-grade steel wire. Straight model. Suitable for industrial use.

Application: Can be used with (cordless) portable drills, drill presses. For cleaning and deburring of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | ☞ | pcs/PU | Item no. | €/PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 50 | 6 | 0,20 | 4500 | 20 | 1 | 798.0360 | 4,40 |

Cup brush w. shank 6mm - Crimped wire, brass



Execution: Crimped wire end brush with $\phi 6$ mm shank and high-grade brass wire. Straight model. Suitable for industrial use.

Application: Can be used with (cordless) portable drills, drill presses. For cleaning and deburring of copper, brass or bronze.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 50 | 6 | 0,20 | 4500 | 20 | 1 | 798.0365 | 8,31 |

Cup brush w. shank 6mm - Crimped wire, steel




Execution: Crimped wire cup brush with $\phi 6$ mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with (cordless) portable drills, drill presses. For cleaning and deburring of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 75 | 6 | 0,30 | 4500 | 10 | 1 | 798.0370 | 4,61 |

Wheel brush w. shank 6mm - Nylon



Execution: Nylon wheel brush with $\phi 6$ mm shank. Suitable for industrial use.

Application: Ideal for cleaning of paint residues on wood or metal, removing of light rust or temper colour of welding slags, cleaning of non-ferrous metals, grain structures of wood. Adapts ideally to the contours of the workpiece without hardly removing any of the workpiece material. Wear of the brush results in constant operating properties due to exposure of new grit.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|--------------|
| 100 | 6 | 1,2/ K80 | 4500 | 10 | 1 | 798.0400 | 14,40 |

Cup brush w. shank 6mm - Nylon



Execution: Nylon cup brush with $\phi 6$ mm shank. Suitable for industrial use.

Application: Ideal for cleaning of paint residues on wood or metal, removing of light rust or temper colour of welding slags, cleaning of non-ferrous metals, grain structures of wood. Adapts ideally to the contours of the workpiece without hardly removing any of the workpiece material. Wear of the brush results in constant operating properties due to exposure of new grit.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|--------------|
| 65 | 6 | 1,2/ K80 | 4500 | 10 | 1 | 798.0405 | 12,27 |

Wheel brush w. shank 6mm - Twist knot wire, steel




Execution: Crimped wire wheel brush with $\phi 6$ mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with portable drills, drill presses and high-speed hand-held machines. For cleaning and deburring of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 70 | 6 | 0,50 | 15000 | 10 | 1 | 798.0500 | 9,15 |

End brush w. shank 6mm - Crimped wire, steel

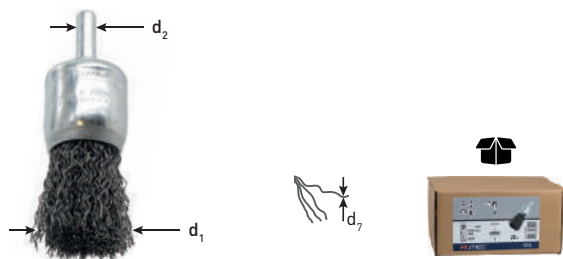

Execution: Crimped wire end brush with $\phi 6$ mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with portable drills, drill presses and high-speed hand-held machines. For cleaning and deburring of hard to access places and interiors of tubes, workpieces, slots etc. made of low- or unalloyed low-carbon steels.

| d_1 | d_2 | d_7 | Max. RPM | | pcs/PU | Item no. | € / PU |
|-------|-------|-------|----------|----|--------|----------|-------------|
| 22 | 6 | 0,30 | 6000 | 20 | 1 | 798.0600 | 4,53 |

Universal hand wire brush, steel



Execution: Plastic handle with single row brush made of hardened high-grade steel wire.

Application: Manual use, for removing of rust and deburring of low-alloyed or unalloyed low-carbon steels.

| l_1 | H | d_7 | | pcs/PU | Item no. | € / PU |
|-------|----|-------|----|--------|----------|-------------|
| 265 | 28 | 0,30 | 10 | 1 | 798.0820 | 3,49 |

Universal hand wire brush, stainless steel



Execution: Plastic handle with single row brush made of high-grade stainless steel wire.

Application: Manual use, for removing of rust and deburring of Cr-Ni-steels including stainless steel.

| l_1 | H | d_7 | | pcs/PU | Item no. | € / PU |
|-------|----|-------|----|--------|----------|-------------|
| 265 | 28 | 0,30 | 10 | 1 | 798.0825 | 4,28 |

Universal hand wire brush, brass




Execution: Plastic handle with single row brush made of high-grade brass wire.

Application: Manual use, for removing of rust and deburring of copper, brass and bronze.

| l_1 | H | d_7 | | pcs/PU | Item no. | € / PU |
|-------|----|-------|----|--------|----------|-------------|
| 265 | 28 | 0,30 | 10 | 1 | 798.0830 | 5,43 |

Wire brush - steel wire

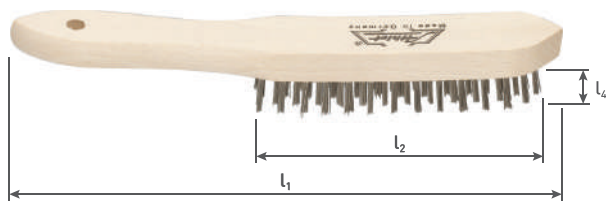

Execution: Wooden wire brush with hardened high-grade 0.35mm steel wire.

Application: Manual use, for removing of rust and deburring of low-alloyed or unalloyed low-carbon steels.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | €/ pc |
|-------|-------|-------|-------|-----|--------|--------------|-------------|
| 140 * | 280 | 25 | 0,35 | 2 | 12 | 14.106100.02 | 1,74 |
| 140 | 280 | 25 | 0,35 | 3 | 12 | 798.0900 | 2,08 |
| 140 | 280 | 25 | 0,35 | 4 | 12 | 798.0905 | 2,25 |
| 140 | 280 | 25 | 0,35 | 5 | 12 | 798.0910 | 2,47 |
| 140 | 280 | 25 | 0,35 | 6 | 12 | 798.0915 | 2,76 |

106100



* Phase-out item, available until stock has depleted

Wire brush - brassed steel wire



Execution: Wooden wire brush with 0.4mm brass-plated, high-grade, high-tensile strength steel wire.

Application: Manual use, for removing of rust and deburring of copper, brass and bronze.


| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | €/ pc |
|-------|-------|-------|-------|-----|--------|--------------|-------------|
| 140 * | 280 | 22 | 0,4 | 3 | 12 | 14.106102.03 | 1,91 |
| 140 * | 280 | 22 | 0,4 | 4 | 12 | 14.106102.04 | 2,08 |
| 140 * | 280 | 22 | 0,4 | 5 | 12 | 14.106102.05 | 2,30 |
| 140 * | 280 | 22 | 0,4 | 6 | 12 | 14.106102.06 | 2,55 |

106102



* Phase-out item, available until stock has depleted

Wire brush - stainless steel wire

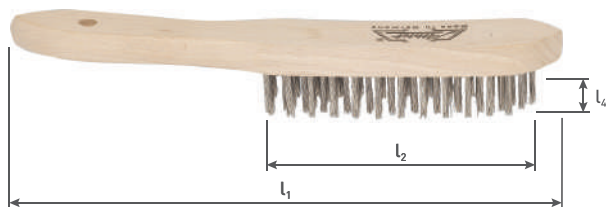

Execution: Wooden wire brush with hardened high-grade 0.3mm stainless steel wire.


Application: Manual use, for removing of rust and deburring of Cr-Ni-steels including stainless steel.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | €/ pc |
|-------|-------|-------|-------|-----|--------|----------|-------------|
| 140 | 280 | 22 | 0,3 | 3 | 12 | 798.0925 | 4,17 |
| 140 | 280 | 22 | 0,3 | 4 | 12 | 798.0930 | 4,89 |
| 140 | 280 | 22 | 0,3 | 5 | 12 | 798.0935 | 5,40 |

106105



Wire brush - brass wire

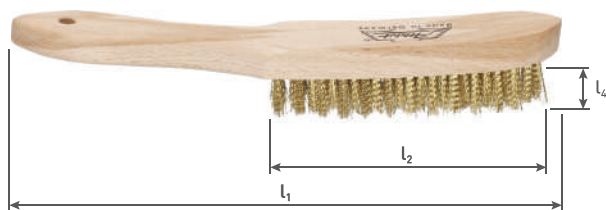

Execution: Wooden wire brush with 0.25mm crimped high-quality high-density brass wire.

Application: Manual use, for removing of rust and deburring of copper, brass and bronze.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | €/ pc |
|-------|-------|-------|-------|-----|--------|----------|-------------|
| 140 | 280 | 20 | 0,25 | 4 | 12 | 798.0920 | 6,76 |

106106



File brush



Execution: Wooden file brush with scraper band trim with hardened high-grade 0.35mm steel wire.

Application: Manual use, for filing and cleaning of low-alloyed or unalloyed low-carbon steels.

| l_2 | l_1 | l_4 | d_7 | pcs/PU | Item no. | € / pc |
|-------|-------|-------|-------|--------|----------|--------|
| 110 | 250 | 8 | 0,35 | 12 | 798.0955 | 4,63 |

106120



Welt seam brush




Execution: Wooden welt seam brush with 0.35mm hardened smooth high-grade steel wire in V-shaped tapered fill.

Application: Manual use, for brushing and cleaning of low-alloyed or unalloyed low-carbon steels.


| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / pc |
|-------|-------|-------|-------|---|--------|--------------|--------|
| 140 * | 280 | 35 | 0,35 | 3 | 12 | 14.106125.00 | 5,82 |

106125



* Phase-out item, available until stock has depleted

Fine scratch brush

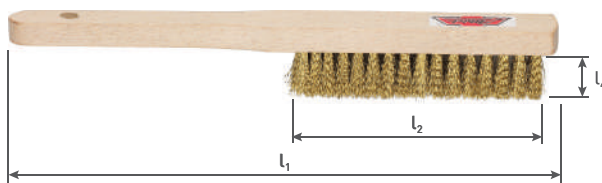


Execution: Wooden wire brush with 0.2mm crimped high-quality high-density brass wire.

Application: Manual use, for removing of rust and deburring of low-alloyed or unalloyed low-carbon steels, copper, brass and bronze.


| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / pc |
|-------|-------|-------|-------|---|--------|--------------|--------|
| 105 * | 220 | 17 | 0,2 | 4 | 12 | 14.106130.00 | 7,48 |

106130



* Phase-out item, available until stock has depleted

Spark plug brush

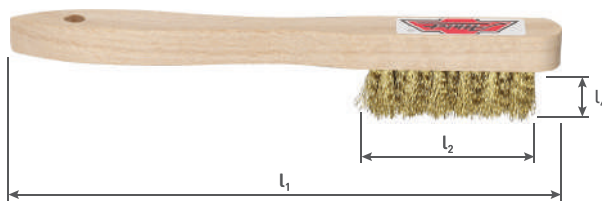



Execution: Wooden spark plug brush with 0.15mm crimped high-quality high-density brass wire.

Application: Manual use, especially for brushing and cleaning spark plugs. Also suitable for low-alloyed or unalloyed low-carbon steels, copper, brass and bronze.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / pc |
|-------|-------|-------|-------|---|--------|----------|--------|
| 40 | 220 | 15 | 0,15 | 3 | 12 | 798.0960 | 2,81 |


106145



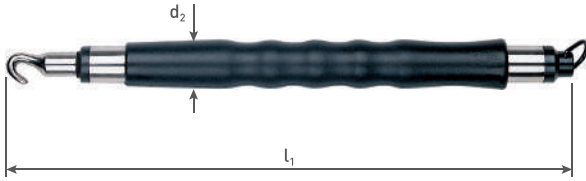A140
Wire twister


Execution: Wire twister for binding wire, spindle with automatic return, with ergonomic rubber handle.

| d_2 | l_1 | pcs/PU | Item no. | €/pc |
|-------|-------|--------|--------------|--------------|
| 31 | 310 | 1 | 14.1370.0000 | 29,93 |

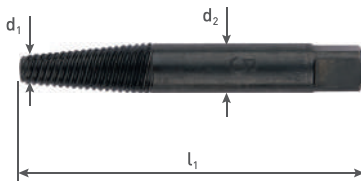1370
Screw extractor


Execution: Screw extractor made of high-alloy CrV-steel, for screws with right-hand thread.

Application: For removing broken screws, threaded bolts, etc.

| Nr. | l_1 | d_1 | d_2 | M | pcs/PU | Item no. | €/pc |
|-----|-------|-------|-------|---------|--------|-------------|--------------|
| 1 * | 50 | 1,4 | 3,6 | M3-M6 | 6 | 14.840.0010 | 3,06 |
| 2 * | 57 | 2,1 | 4,9 | M6-M8 | 6 | 14.840.0020 | 3,06 |
| 3 * | 64 | 3,1 | 6,5 | M8-M11 | 6 | 14.840.0030 | 3,15 |
| 4 * | 71 | 4,8 | 8,8 | M11-M14 | 6 | 14.840.0040 | 3,44 |
| 5 * | 78 | 6,2 | 11 | M14-M18 | 6 | 14.840.0050 | 4,25 |
| 6 * | 85 | 9,4 | 15 | M18-M24 | 6 | 14.840.0060 | 6,38 |
| 7 * | 92 | 12,7 | 19 | M24-M33 | 1 | 14.840.0070 | 9,27 |
| 8 * | 100 | 17,5 | 24 | M33-M45 | 1 | 14.840.0080 | 14,45 |

840


* Phase-out item, available until stock has depleted


845

| Description | Type | Content | Item no. content | M | pcs/PU | Item no. | € / PU |
|---------------------------|------|------------|------------------|--------|--------|-------------|--------------|
| 5 pc set Screw extractors | 840 | 1x M3-M6 | 14.840.0010 | M3-M18 | 1 | 14.845.0010 | 15,43 |
| | 840 | 1x M6-M8 | 14.840.0020 | | | | |
| | 840 | 1x M8-M11 | 14.840.0030 | | | | |
| | 840 | 1x M11-M14 | 14.840.0040 | | | | |
| | 840 | 1x M14-M18 | 14.840.0050 | | | | |
| 6 pc set Screw extractors | 840 | 1x M3-M6 | 14.840.0010 | M3-M24 | 1 | 14.845.0020 | 22,02 |
| | 840 | 1x M6-M8 | 14.840.0020 | | | | |
| | 840 | 1x M8-M11 | 14.840.0030 | | | | |
| | 840 | 1x M11-M14 | 14.840.0040 | | | | |
| | 840 | 1x M14-M18 | 14.840.0050 | | | | |
| | 840 | 1x M18-M24 | 14.840.0060 | | | | |
| 8 pc set Screw extractors | 840 | 1x M3-M6 | 14.840.0010 | M3-M45 | 1 | 14.845.0030 | 54,32 |
| | 840 | 1x M6-M8 | 14.840.0020 | | | | |
| | 840 | 1x M8-M11 | 14.840.0030 | | | | |
| | 840 | 1x M11-M14 | 14.840.0040 | | | | |
| | 840 | 1x M14-M18 | 14.840.0050 | | | | |
| | 840 | 1x M18-M24 | 14.840.0060 | | | | |
| | 840 | 1x M24-M33 | 14.840.0070 | | | | |
| | 840 | 1x M33-M45 | 14.840.0080 | | | | |

Pick-up tool, magnetic


Execution: Magnetic pick-up tool with flexible shaft, blade with round magnet, chrome-plated. With ergonomic 1C handle.

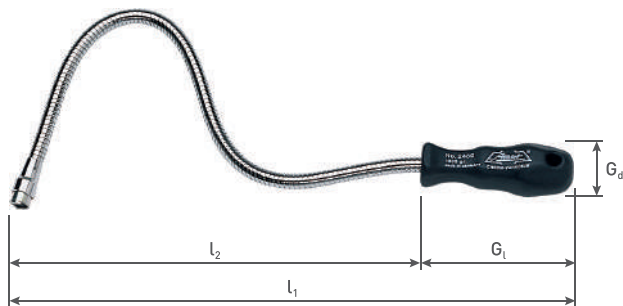

| Magnetic force (kg) | l_2 | l_1 | G_1 | G_d | pcs/PU | Item no. | € / pc |
|---------------------|-------|-------|-------|-------|--------|--------------|--------------|
| 1,0 | 385 | 475 | 90 | 32 | 1 | 14.2460.1000 | 19,30 |
| 1,8 | 430 | 530 | 100 | 35 | 1 | 14.2460.1800 | 26,82 |


2460

Pick-up tool magnetic, telescopic

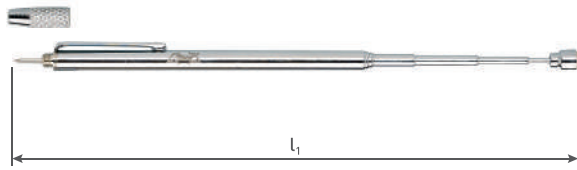


Execution: Telescopic magnetic pick-up tool, with integral scriber / nozzle cleaning needle, extra-strong neodymium magnet. Max. telescopic length 630 mm.

| l_1 | pcs/PU | Item no. | € / pc |
|-------|--------|--------------|--------|
| 145 | 12 | 14.2461.0000 | 10,58 |




Magnetic pick up tool with spring system

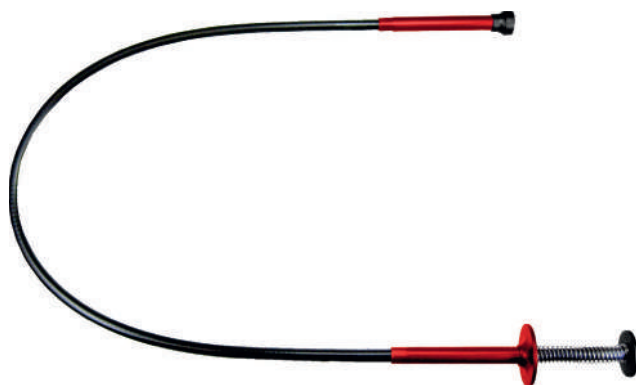


Execution: Magnetic gripping tool with spring pressure system, with strong neodymium ring magnet and 4-part claw handle (up to 23 mm), sheathed shaft. Usable length approx. 650 mm, one-handed operation possible.

Application: For gripping small parts in inaccessible places.

| l_1 | Magnetic force (kg) | pcs/PU | Item no. | € / pc |
|-------|---------------------|--------|--------------|--------|
| 700 | 0,4 | 1 | 14.2459.0010 | 17,21 |



Magnetizer/demagnetizer



Application: For magnetizing screwdrivers or for demagnetizing when a magnetic property is no longer required in electronic applications.

| l_1 | d_1 | d_2 | pcs/PU | Item no. | € / pc |
|-------|-------|-------|--------|--------------|--------|
| 55 | 48 | 28 | 3 | 14.2470.0000 | 5,74 |



Universal key for control cubicles No. 2




Execution: Multi-tool No. 2 made from cast zinc with the following drives:
 - Hexagon 1/4" bitholder.
 - Square: 5, 6, 7, 8 mm.
 - Triangle: 9 mm.
 - Two-way key bit: 3 - 5 mm.
 - Radiator vent key 5 mm.
 Includes a double-sided bit with PH 2 and SL 1.0x7.0.

| Nr. | l ₁ | d ₁ | d ₂ | pcs/PU | Item no. | € / pc |
|-----|----------------|----------------|----------------|--------|--------------|--------|
| 2 | 72 | 72 | 16 | 12 | 14.101610.20 | 24,64 |

101610
/2

Universal key for control cubicles No. 3

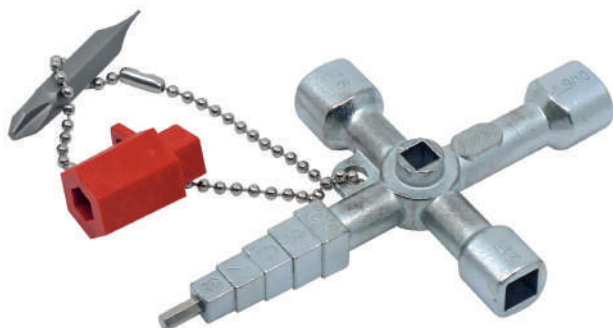

Execution: Multi-tool No. 3 made from cast zinc with the following drives:
 - Hexagon 1/4" bitholder.
 - Square: 5, 7, 8 mm.
 - Triangle: 9 mm.
 - External square 10 mm (conical).
 - Radiator vent key 5 mm.
 Includes a double-sided bit with PH 2 and SL 1.0x7.0.

| Nr. | l ₁ | d ₁ | d ₂ | pcs/PU | Item no. | € / pc |
|-----|----------------|----------------|----------------|--------|--------------|--------|
| 3 | 101 | 63 | 16 | 12 | 14.101610.30 | 24,24 |

101610
/3

Universal key for control cubicles No. 4



Execution: Multi-tool No. 4 made from cast zinc with the following drives:
 - Hexagon 1/4" bitholder.
 - Square: 6, 7, 8 mm.
 - Triangle: 9 mm.
 - Two-way key bit: 3 - 5 mm.
 Includes a double-sided bit with PH 2 and SL 1.0x7.0.

| Nr. | l ₁ | d ₁ | d ₂ | pcs/PU | Item no. | € / pc |
|-----|----------------|----------------|----------------|--------|--------------|--------|
| 4* | 55 | 51 | 21 | 12 | 14.101610.40 | 24,24 |

101610
/4

* Phase-out item, available until stock has depleted

Stainless steel hook tools



Execution: Hook tools with blade made of hardened stainless steel.

Application: For quick assembling and demounting of small parts such as O-rings, seal rings, springs, etc., for cleaning of threads and drill holes, for piercing of soft materials. Also suitable for locating of small cracks in metal.

| Nr. | L_2 | L_1 | G_1 | G_d | pcs/PU | Item no. | € / pc |
|-----|-------|-------|-------|-------|--------|--------------|-------------|
| 1 | 90 | 170 | 80 | 28 | 6 | 14.2389.0010 | 6,25 |
| 2 | 90 | 170 | 80 | 28 | 6 | 14.2389.0020 | 6,25 |
| 3 | 90 | 170 | 80 | 28 | 6 | 14.2389.0030 | 6,25 |
| 4 | 90 | 170 | 80 | 28 | 6 | 14.2389.0040 | 6,25 |

2389

Hook set, stainless steel



Execution: Set of stainless steel hook tools in nylon pouch with transparent cover.

2389
/S1

| Description | Type | Content | Item no. content | pcs/PU | Item no. | € / PU |
|---------------------------------|------|---------------|------------------|--------|--------------|--------------|
| 4 pc set hooks, stainless steel | 2389 | 1x Round awl | 14.2389.0010 | 1 | 14.2389.1000 | 31,79 |
| | 2389 | 1x Round hook | 14.2389.0020 | | | |
| | 2389 | 1x Hook 45° | 14.2389.0030 | | | |
| | 2389 | 1x Hook 90° | 14.2389.0040 | | | |

All prices as mentioned in this catalogue are in euros and excluding taxes.
Prices and models of items are subject to change at any time without notice.
Prices and specifications are subject to printing errors.
This ROTEC Catalogue is published by Rotec B.V., Ede, The Netherlands

ROTEC B.V.

Galileilaan 32
6716 BP EDE
The Netherlands

TEL

+31 - 88 - 574 15 90

EMAIL • WEB

info@athlet.tools
www.athlet.tools

VAT • EORI

09 07 73 71
NL 8145.15.332 B01

BANK / IBAN • SWIFT

NL48 RABO 0307 0553 10
RABONL2U

 **MADE IN
GERMANY**

